MURR ELEKTRONIK
stay connected

T-COUPLER SLIMLINE M12 MALE / 2X M12 FEMALE

T-coupler (Slim Line)
Male straight – females straight
M12 – M12
5-pole
Distribution function (NO)

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product


Illustration


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

stay connected



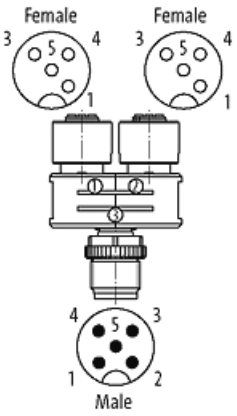

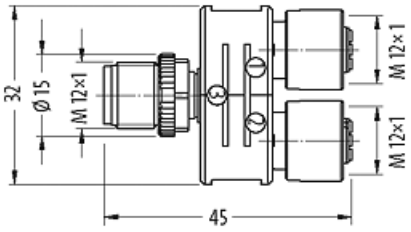

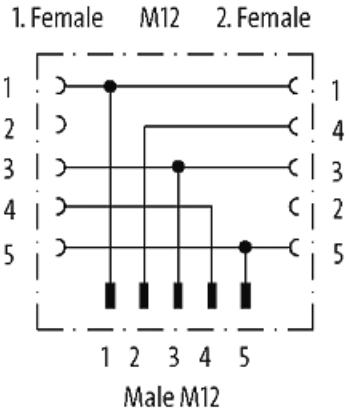

Product may differ from Image

Approvals

cULus Listed

Form

Form	41131

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

stay connected

Technical Data	
Operating voltage	max. 60 V AC/DC
Operating voltage (only UL listed)	30 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85366990
EAN	4048879144865
eClass	27143423
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20