Datenblatt - Fiche technique - Data sheet

**21.17.3006**




ROLINE RJ-45 Kupplung, Keystone, geschirmt, Kat. 6A

ROLINE Coupleur Keystone RJ-45 blindé, Cat. 6A

ROLINE Cat.6a Keystone Modular Coupler, STP

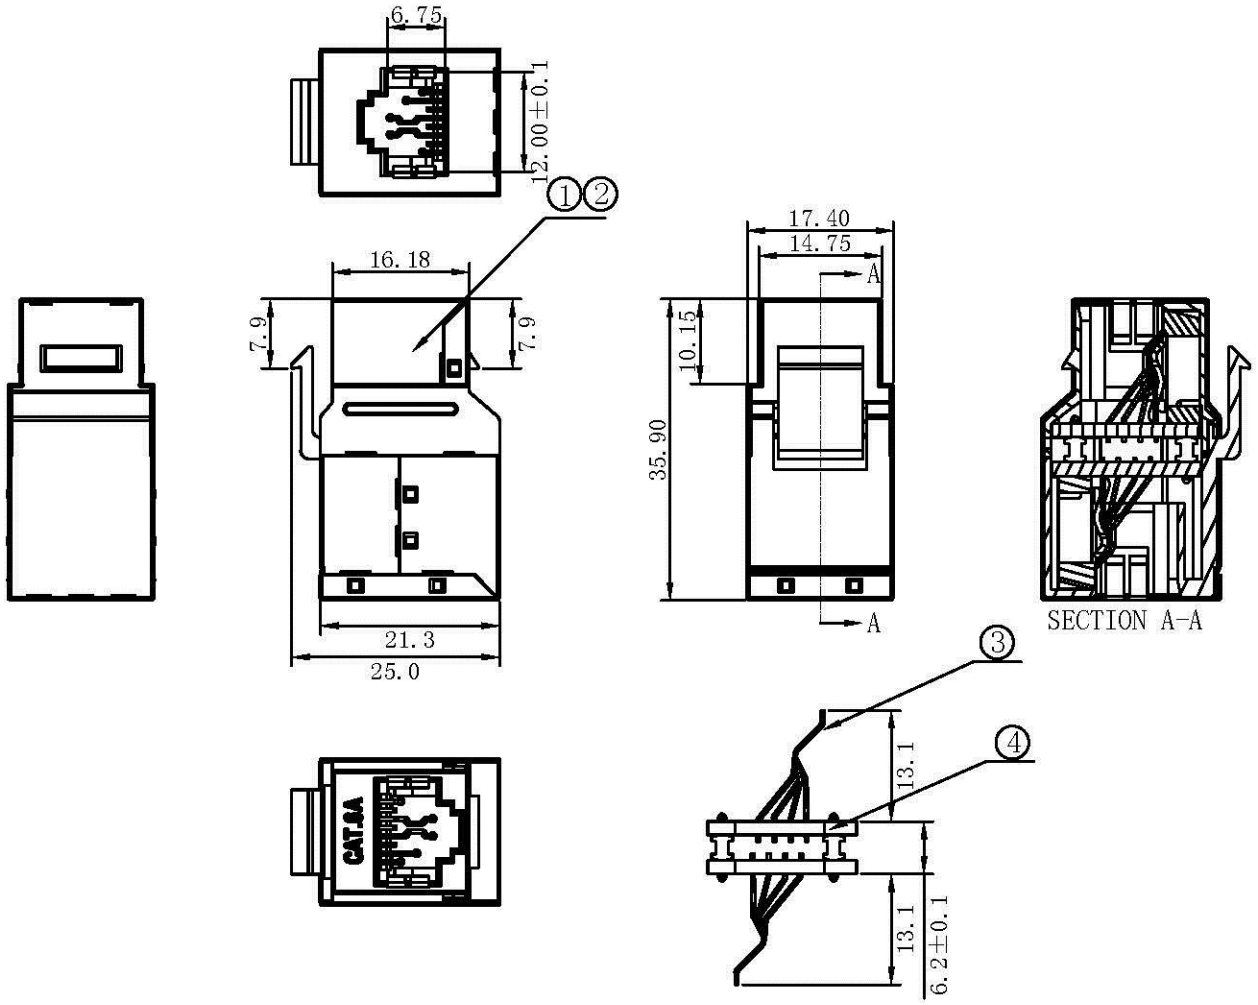


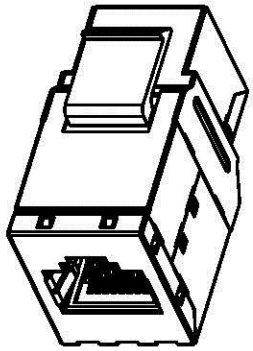

**NOTES:**

**ELECTRICAL:**

1. Contact Resistance: 20MΩ MAX.
2. Insulation Resistance: 500MΩ MIN. @500V DC
3. Withstand Voltage: DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testig for Cat. 6A to ISO/IEC 11801 Ed. 2.2:2011-06
   DIN EN 50173-1:2011-09
   TIA/EIA-568-C.2 (2009-08)

**ENVIRONMENTAL:**

1. Storage temperature: -40 ℃ ~ +70 ℃
2. Operating temperature: -10 ℃ ~ +60 ℃

**MECHANICAL:**

1. RJ45 Contact Life: 750 times Min.
2. Plug in force: <N30

**Fluke Test: Permanent Link ISO 11801 (PL2) Class Ea**

MATERIAL LIST:

| NO | PARTS NAME | SPECIFICATION STANDARD | QT'Y | REMARK |
|---|---|---|---|---|
| ④ | PCB | FR-4 | 2 | |
| ③ | Contact | 8P8C 3u" Gold Plated | 16 | |
| ② | Shielded | Nickel Plated brass t = 0.2mm | 1 | |
| ① | Shell | ABS | 1 | |

| BY | CHK | REVISION RECORD MODIFICATIONS | DATE | REV. |
|---|---|---|---|---|
| | | NEW | 2015-01-05 | A |

SECOMP

| Item no. | 21.17.3006 | | |
|---|---|---|---|
| Desc. | ROLINE Keystone Modular Coupler Cat. 6A, STP, silver | | |

| DRAWNBY | CHECKBY | APPOBY | DATE |
|---|---|---|---|
| | | | 2015-01-05 |