Brand of NTN corporation

Technical data





6022EEC3

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

VISUAL (S)

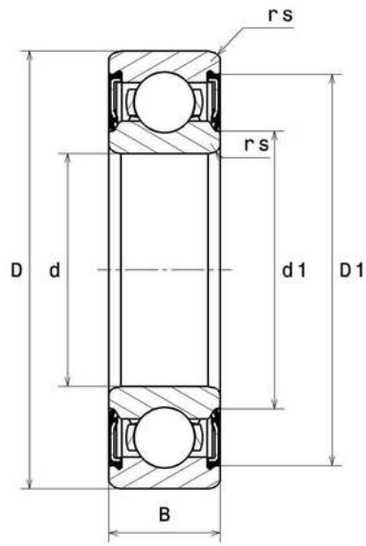

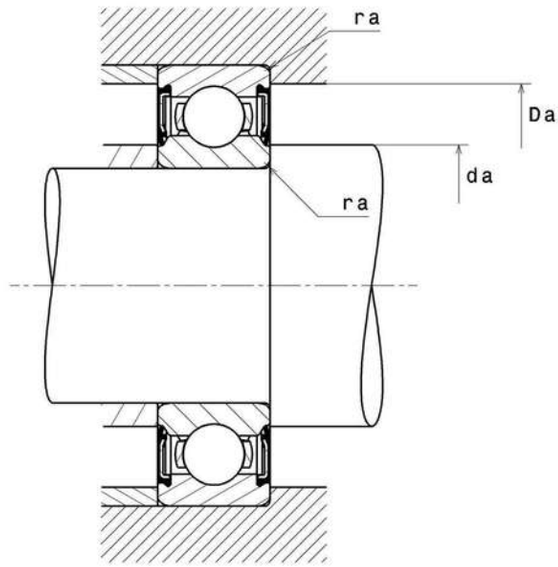

NTN Europe
1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

6022EEC3
Single row deep groove ball bearings

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	110 mm
D - External diameter	170 mm
B - Bearing/Inner ring width	28 mm
d1 - External diameter inner ring	123,7 mm
D1 - Inner diameter outer ring	157,3 mm
rs - Min fillet radius	2 mm
Radial clearance class	C3
Mass	1,49 kg

PRODUCT PERFORMANCE	
C - Dynamic load	86400000 mN
C0 - Static load	73000000 mN
Cu - Fatigue limit load	2800000 mN
f0 - Coefficient	15.7
N lim - Mechanical Limit Speed	13800 °/s
Tmin - Min operating temperature	243,15 °K
Tmax - Max operating temperature	393,15 °K

BEARING FREQUENCIES	
BPFO - Over rolling frequency on outer ring (60 rpm)	6.087 Hz
BPFI - Over rolling frequency on inner (60 rpm)	7.913 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	7.538 Hz
BRF - Rotational frequency – rolling element (60 rpm)	3.769 Hz
FTF - Rotational frequency - cage (60 rpm)	0.435 Hz

6022EEC3
Single row deep groove ball bearings

ABUTMENT	
da min - Min shoulder diameter IR	119 mm
da max - Max shoulder diameter IR	123,7 mm
Da max - Max shoulder diameter OR	161 mm
ra max - Max shaft & housing fillet radius	2 mm

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr