
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	INITIAL RELEASE	04/25/01	MCCORMICK
B	REVISED TOLERANCING (ECN# 1537)	10/06/03	MCCORMICK
C	ECN 2554: ADDED COUPLING NUT TORQUE SPEC.	9/7/2006	J. KIEZULAS
D	ECN 3128: UPDATE DWG FORMAT	12/19/07	D.GRIFFIN

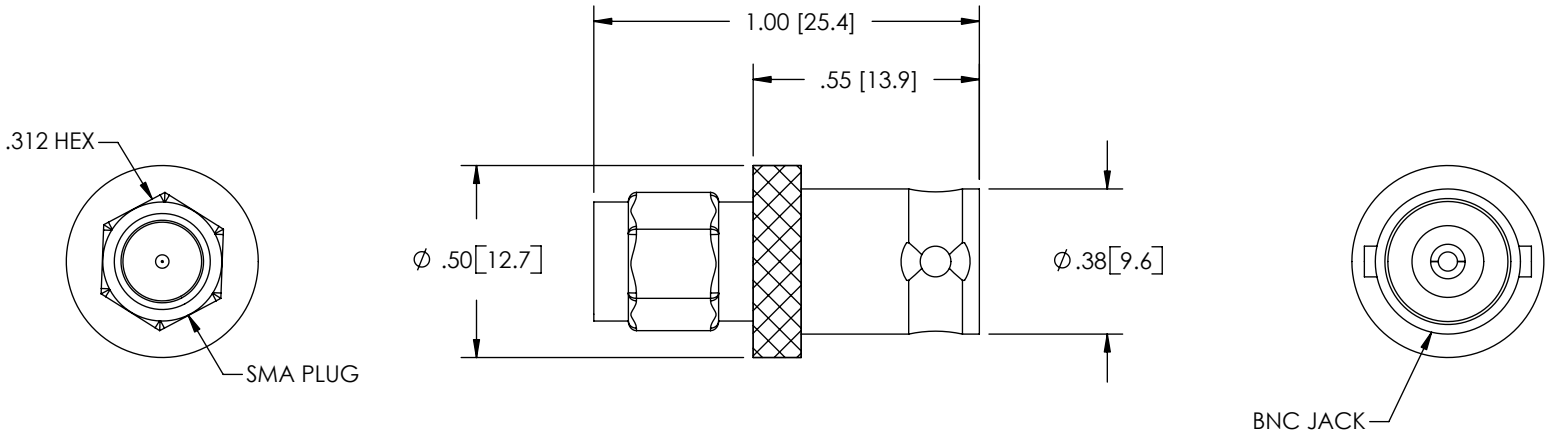

SPECIFICATIONS;

MATERIALS;
SHELL: BRASS
INSULATOR: ACETAL OR EQUIVALENT DIELECTRIC MATERIAL

FINISH;
SHELL: NICKEL PLATED
CONTACT: GOLD PLATED

RECOMMENDED COUPLING NUT TORQUE 5 IN-LBS

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5] ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]
OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / - 0
> 60 [1524] +5% / -0%
PROJ

APPROVALS	DATE
DRAWN BY MCCORMICK	04/25/01
CHECKED BY D.PARHAM	04/25/01
APPROVED BY T.CLARK	04/25/01

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com CONNECTIVITY PRODUCTS
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: COAXIAL

PRODUCT DESCRIPTION: SMA-BNC COAXIAL ADAPTOR

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BA29	D

SCALE: NONE | CAD FILE: BA29.SLDDRW | SHEET 1 OF 1