
## FEMALE END VIEW





1 = BROWN
3 = BLUE
4 = BLACK

pico fast.

## SPECIFICATIONS

| | |
|---|---|
| CONTACT CARRIER MATERIAL/COLOR | NYLON OR TPU/BLACK |
| MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW |
| CONTACT MATERIAL/PLATING | BRASS/GOLD |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL |
| RATED CURRENT [A] | 4.0 A |
| RATED VOLTAGE [V] | 125 VAC/VDC |
| OUTER JACKET MATERIAL/COLOR | TPU/BLACK |
| CONDUCTOR INSULATION MATERIAL | PVC |
| NUMBER OF CONDUCTORS [AWG] | 3x24 AWG |
| TEMPERATURE RANGE | −40°C to +90°C (−40°F to +194°F) |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP67 |

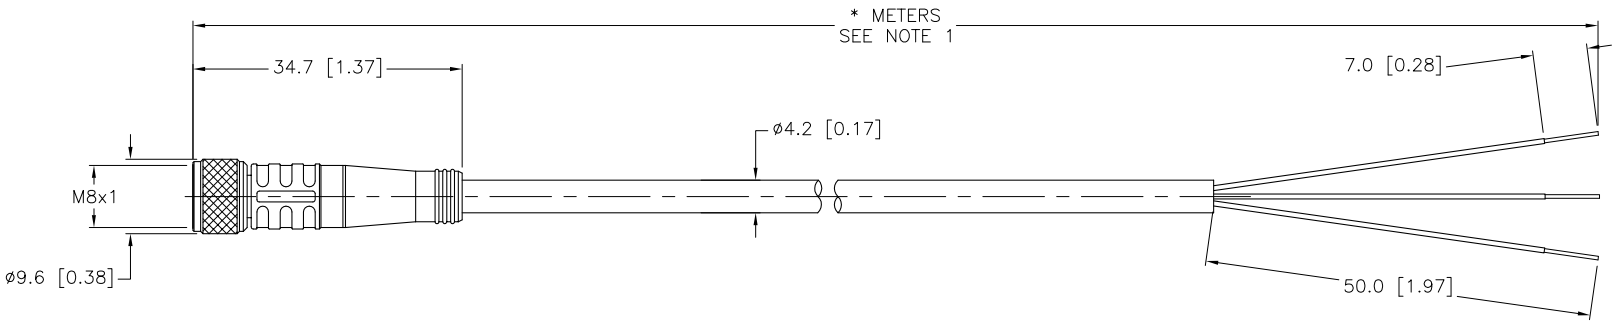


| CABLE LENGTH | TOLERANCE |
|---|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH<br>− 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |

| STRIP LENGTH | TOLERANCE |
|---|---|
| 0–7mm | ±0.5mm |
| 8–29mm | ±1.0mm |
| 30–49mm | ±2.0mm |
| 50–69mm | ±3.0mm |
| 70–100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |

**SOURCE DRAWING - FOR REFERENCE ONLY**

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.

| REV | DESCRIPTION | BY | DATE | ECO NO. |
|---|---|---|---|---|
| I | UPDATE CABLE OD | CK | 08/05/11 | 35981 |

RELATED DOCUMENTS
1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
turck.com

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT CBM | DATE 04/26/99
DSGN | SCALE 1=1.0

UNIT OF MEASUREMENT
**MILLIMETER [ INCH ]**
DO NOT SCALE THIS DRAWING

DESCRIPTION
PKG 3M−*/S90

IDENTIFICATION NO.

REV |

FILE: 777000274 | SHEET 1 OF 1