stay connected


M12 MALE 0° SHIELDED WIREABLE SCREW TERM.

8-pol. max.0.5mm² 6-8mm


Link to Product

Illustration




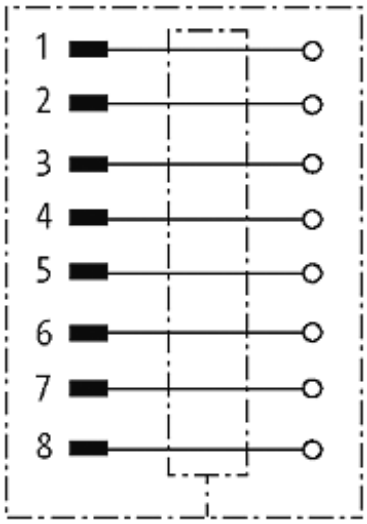

Male

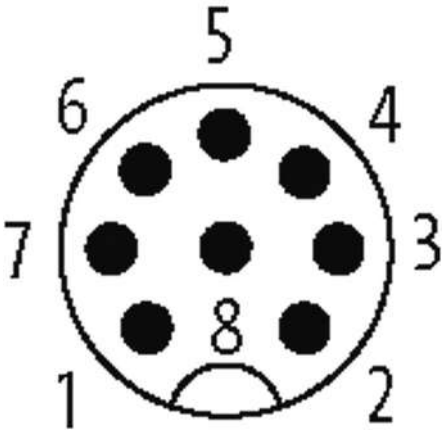

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

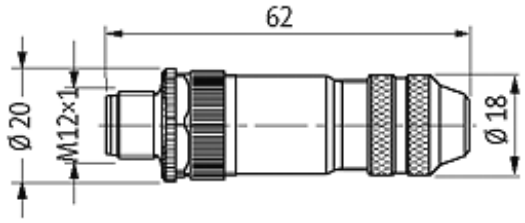

Product may differ from Image

Form	
Form	17341
Technical Data	
Operating voltage	max. 30 V AC/DC
Operating current per contact	max. 2 A
Connection cross section	max. 0.5 mm²
Sealing range (cable Ø)	6...8 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Housing	Brass, nickel plated
General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85369010
EAN	4048879195317
eClass	27279218
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com