
Electronic timer CT-SDS.22

Star-delta change-over with 2 n/o contacts
Data sheet



① Rotary switch for the preselection of the time range

② Potentiometer with direct reading scale for the fine adjustment of the time delay

③ U/T: green LED -
control supply voltage applied
timing

④ R1: yellow LED -
output relay 1 energized

⑤ R2: yellow LED -
output relay 2 energized

⑥ Marker label

Features

- Rated control supply voltage 24-48 V DC, 24-240 V AC
- Single-function timer with star-delta change-over
- One device includes 7 time ranges (0.05 s - 10 min)
- 2 n/o contacts
- 3 LEDs for status indication
- Width of 22.5 mm
- Sealable transparent cover (optional accessory) for protection against unauthorized changes of time values
- Integrated marker label

Approvals

	UL 508, CAN/CSA C22.2 No.14	
	GL	
	GOST	
	CB scheme	
	CCC	pending

Marks

CE	CE	
	C-Tick	pending

Order data

Type	Rated control supply voltage	Time range	Output	Order code
CT-SDS.22	24-48 V DC, 24-240 V AC	0.05 s - 10 min	2 n/o contacts	1SVR 630 210 R3300

Order data - Accessories

Adapter for screw mounting on panel

Type	Width in mm	Order code
ADP.01	22.5	1SVR 430 029 R0100

Sealable transparent cover

Type	Width in mm	Order code
COV.01	22.5	1SVR 430 005 R0100

Marker label

Type	Width in mm	Order code
MAR.01	22.5	1SVR 366 017 R0100

Electronic timer CT-SDS.22

Star-delta change-over with 2 n/o contacts

Data sheet

Application

The CT-S range timers are designed for use in industrial applications. They operate over an universal range of supply voltages and a large time delay range, within compact dimensions. The easy-to-set front-face potentiometers, with direct reading scales, provide accurate time delay adjustment.

Operating mode

The CT-SDS.22 has 2 n/o contacts and includes 2 separated timing circuits: an adjustable motor starting delay, the time the star contactor is energized, and an 50 ms fixed open transition delay before the delta contactor is energized. A rotary switch, on the front of the unit, allows selection of one of 7 time ranges from 0.05 s - 10 min. The fine adjustment of the time delay is made via an internal potentiometer, with a direct reading scale, on the front of the unit.

Timing is displayed by a flashing green LED labelled U/T.

Function diagram

Remarks

Legend:

☐ Control supply voltage not applied / Output contact open

■ Control supply voltage applied / Output contact closed

Terminal designations on the device and in the diagrams:

The 1st n/o contact is designated 17-18. The 2nd n/o contact is designated 17-28. Control supply voltage is applied to terminals A1-A2.

Function of the yellow LEDs:


The two yellow LEDs are designated R1 and R2. LED R1 shows the status of the 1st n/o contact (17-18) and LED R2 shows the status of the 2nd n/o contact (17-28). LED R1 or R2 glows as soon as the corresponding output relay energizes and turns off when the corresponding output relay de-energizes.

⚠ **Star-delta change-over**

This function requires continuous control supply voltage for timing.

Applying control supply voltage to terminals **A1-A2**, energizes the star contactor connected to terminals **17-18** and begins the set starting time t_1. The green LED flashes during timing. When the starting time is complete, the first output contact de-energizes the star contactor.

Now, the fixed transition time t_2 of 50 ms starts. When the transition time is complete, the second output contact energizes the delta contactor connected to terminals **17-28**. The delta contactor remains energized as long as control supply voltage is applied to the unit.

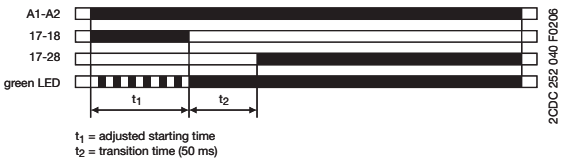

Electronic timer CT-SDS.22


Star-delta change-over with 2 n/o contacts

Data sheet

Examples of application


Star-delta change-over

Control circuit diagram




Star-delta change-over

Power circuit diagram



Connection diagram



17-18 1. n/o contact

17-28 2. n/o contact

A1-A2 Rated control supply voltage U_S
24-48 V DC or 24-240 V AC

Electronic timer CT-SDS.22

Star-delta change-over with 2 n/o contacts

Data sheet

Technical data

Data at T_a = 25 °C and rated values, if noting else indicated

Input circuits - Supply circuit		1SVR 630 210 R3300
Rated control supply voltage U_S	A1-A2	24-48 V DC
	A1-A2	24-240 V AC
Rated control supply voltage tolerance	24-48 V DC	-15...+10 %
	24-240 V AC	-15...+10 %

Typical current / power consumption		24 V DC	230 V AC	115 V AC
	24-48 V DC	12 mA / on request	- / -	- / -
	24-240 V AC	- / -	50 mA / on request	33 mA / on request

Rated frequency		DC; 50/60 Hz
Frequency range AC		47-63 Hz
Power failure buffering time		min. 20 ms

Timing circuit		1SVR 630 210 R3300
Kind of timer	Single-function timer	Star-delta change-over
Time ranges 0.05 s - 10 min		0.05-1 s, 0.15-3 s, 0.5-10 s, 1.5-30 s, 5-100 s, 15-300 s, 0.5-10 min
Recovery time		< 80 ms
Accuracy within the rated control supply voltage tolerance		Δt < 0.004 %/V
Accuracy within the temperature range		Δt < 0.03 %/°C
Star-delta transition time		fixed, 50 ms
Star-delta transition time tolerance		± 2 ms

Indication of operational states		1SVR 630 210 R3300
Control supply voltage / timing	U/T: green LED	⎍‾‾⎍: control supply voltage applied
Control supply voltage / timing	U/T: green LED	⎍⎍⎍⎍: timing
Relay status	R1: yellow LED	⎍‾‾⎍: output relay 1 energized
Relay status	R2: yellow LED	⎍‾‾⎍: output relay 2 energized

Output circuits		1SVR 630 210 R3300
Kind of output	17-18	Relay, 1. n/o contact
	17-28	Relay, 2. n/o contact
Contact material		Cd-free
Rated operational voltage U_e		250 V
Minimum switching voltage / Minimum switching current		12 V / 10 mA
Maximum switching voltage / Minimum switching current		see load limit curves / see load limit curves
Rated operational current I_e (IEC/EN 60947-5-1)	AC12 (resistive) at 230 V	4 A
	AC15 (inductive) at 230 V	3 A
	DC12 (resistive) at 24 V	4 A
	DC13 (inductive) at 24 V	2 A
Mechanical lifetime		30 x 10^6 switching cycles
Electrical lifetime		0.1 x 10^6 switching cycles (AC12, 230 V, 4 A)
Short-circuit resistance, maximum fuse rating (IEC/EN 60947-5-1)	n/c contact	6 A fast-acting
	n/o contact	10 A fast-acting

Electronic timer CT-SDS.22

Star-delta change-over with 2 n/o contacts

Data sheet

General data		1SVR 630 210 R3300
Duty time		100 %
Repeat accuracy (constant parameters)		Δt <± 0.2 %
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inches)
Weight		0.105 kg (0.23 lb)
Mounting position		any
Minimum distance to other units		
normal operation mode	horizontal	none
	vertical	none
Mounting		DIN rail (EN 60715), snap-on mounting without any tool
Degree of protection	enclosure / terminals	IP50 / IP20

Electrical connection		1SVR 630 210 R3300
all circuits		Screw connection
Wire size	fine-strand with wire end ferrule	2 x 0.75-2.5 mm^2 (2 x 18-14 AWG)
	fine-strand without wire end ferrule	2 x 0.75-2.5 mm^2 (2 x 18-14 AWG)
	rigid	2 x 0.5-4 mm^2 (2 x 20-12 AWG)
Stripping length		7 mm (0.28 inches)
Tightening torque		0.6-0.8 Nm

Environmental data		1SVR 630 210 R3300
Ambient temperature range	operation	-25...+60 °C
	storage	-40...+85 °C
Damp heat, cyclic (IEC/EN 60068-2-30)		6 x 24 h cycle, 55 °C, 95 % RH
Vibration, sinusoidal (IEC/EN 60068-2-6)		40 m/s^2, 20 cycles, 10...58/60...150 Hz
Shock, half-sine (IEC/EN 60068-2-27)		100 m/s^2, 11 ms, 3 shocks, all directions


Standards / Directives	1SVR 630 210 R3300
Product standard	IEC 61812-1, EN 61812-1 + A11, DIN VDE 0435 part 2021
EMC Directive	2004/108/EC
Low Voltage Directive	2006/95/EC
RoHS Directive	2002/95/EEC

Electromagnetic compatibility		1SVR 630 210 R3300
Interference immunity		IEC/EN 61000-6-1 IEC/EN 61000-6-2
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10 V/m)
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)
powerful impulses (Surge)	IEC/EN 61000-4-5	Level 4 (2 kV A1-A2)
HF line emission	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		IEC/EN 61000-6-3 IEC/EN 61000-6-4
electromagnetic field (HF radiation resistance)	IEC/CISPR 22, EN 55022	Class B
HF line emission	IEC/CISPR 22, EN 55022	Class B


Isolation data		1SVR 630 210 R3300
Rated insulation voltage U_i	Output circuit 1 / Output circuit 2	300 V
	Input circuit / Output circuit	500 V
Rated impulse withstand voltage U_{imp} (type test) (IEC 60664-1, VDE 0110)	between all isolated circuits	4 kV; 1.2/50 µs
Power-frequency withstand voltage test (Test voltage, routine test)	between all isolated circuits	2.0 kV; 50 Hz, 1 s
Basic insulation (IEC/EN 61140)	Input circuit / Output circuit	500 V
Protective separation (IEC/EN 61140; VDE 0106 part 101 and part 101/A1)	Input circuit / Output circuit	250 V
Pollution degree (IEC/EN 60664, VDE 0110, UL 508)		3
Overvoltage category (IEC/EN 60664, VDE 0110, UL 508)		III

Technical diagrams

Load limit curve

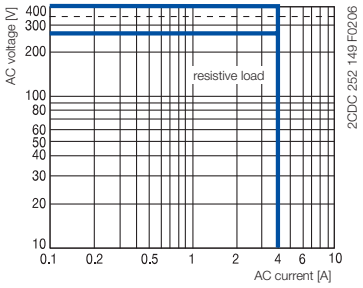


AC load (resistive)

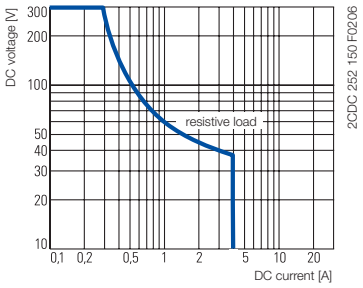


DC load (resistive)


Derating factor F

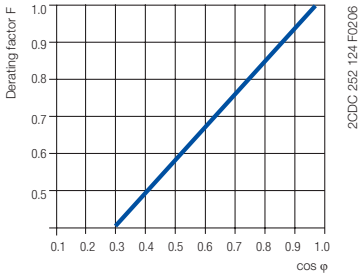

Contact lifetime

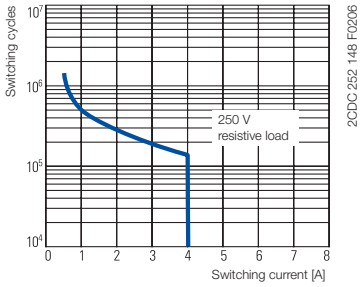


Dimensions
in mm

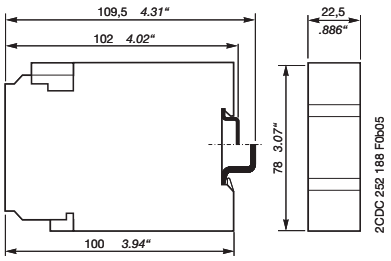


CT-SDS.22


Dimensions accessories
in mm



ADP.01 - Adapter for screw mounting on panel



COV.01 - Sealable transparent cover



MAR.01 - Marker label

As part of the on-going product improvement, ABB reserves the right to modify the characteristics of the products described in this document. The information given is non-contractual.
For further details please contact (www.abb.com/contacts) the ABB company marketing these products in your country.

Document number: 2CDC 111 093 D0201 (08/2007)

ABB STOTZ-KONTAKT GmbH

Eppelheimer Strasse 82, 69123 Heidelberg, Germany
Postfach 10 16 80, 69006 Heidelberg, Germany
Internet http://www.abb.com/lowvoltage → Control Products