GM300-126-11-12-HS

Thermoelectric Generator Module

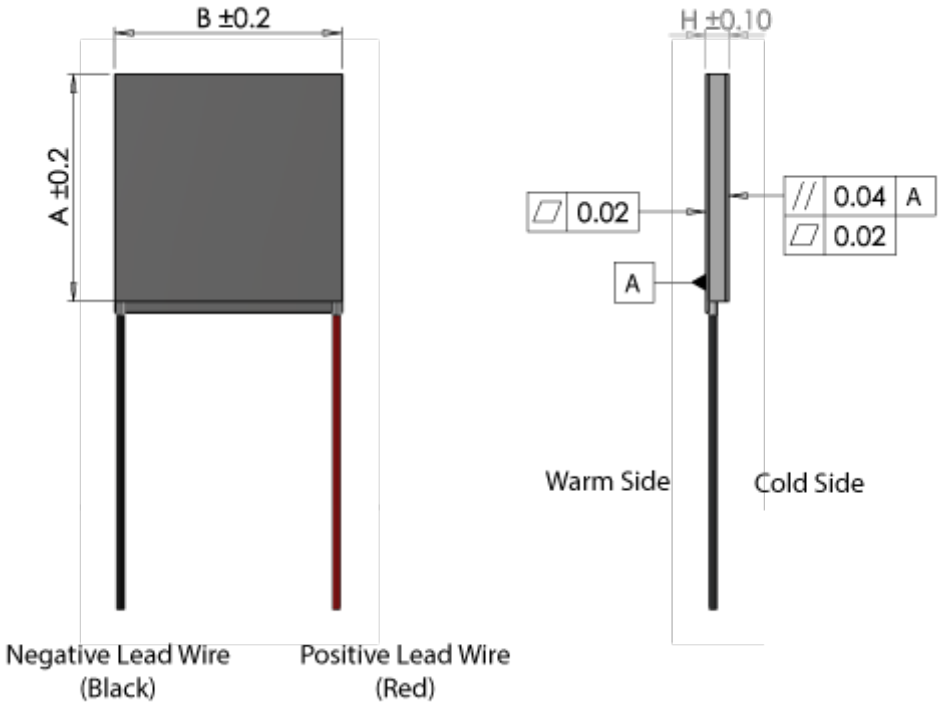

Parameters for hot side temp 300ºC and cold side temp 30ºC

Matched load output power	5.31W
Matched load resistance	5.4Ω ± 15%
Open circuit voltage	10.2V
Matched load output	1.0A
Matched load output voltage	5.4V
Heat flow through module	~105W
Maximum compress (non-destructive)	1.5MPa
Maximum operation temperature	Hot side - 300ºC. Cold side - 200ºC

Features

- Compact structure (no moving parts)
- Reliable performance
- Maintenance-free
- Noise-free operation
- Low-carbon, green technology

Geometric Dimensions

A	35mm
B	35mm
H	3.875mm

Adaptive® Power Management

Adaptive is a registered trademark of European Thermodynamics Limited.
Web: www.etdyn.com Tel: +44(0)116 279 6899 E-mail: info@etdyn.com

GM300-126-11-12-HS

Thermoelectric Generator Module

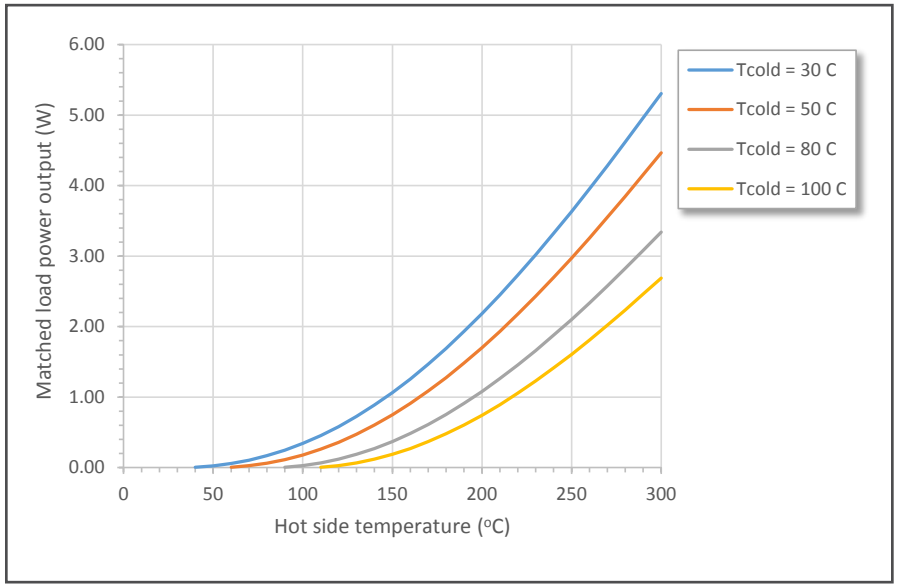

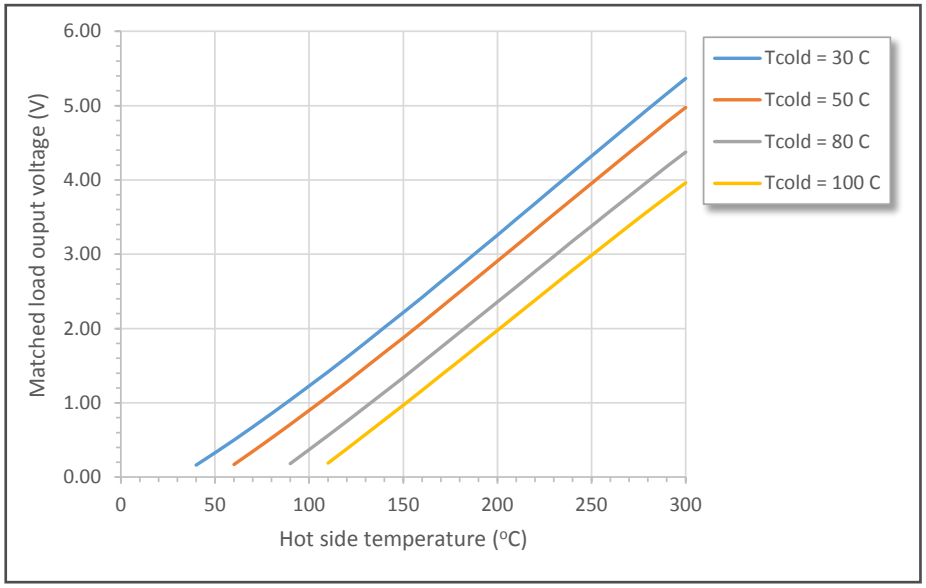

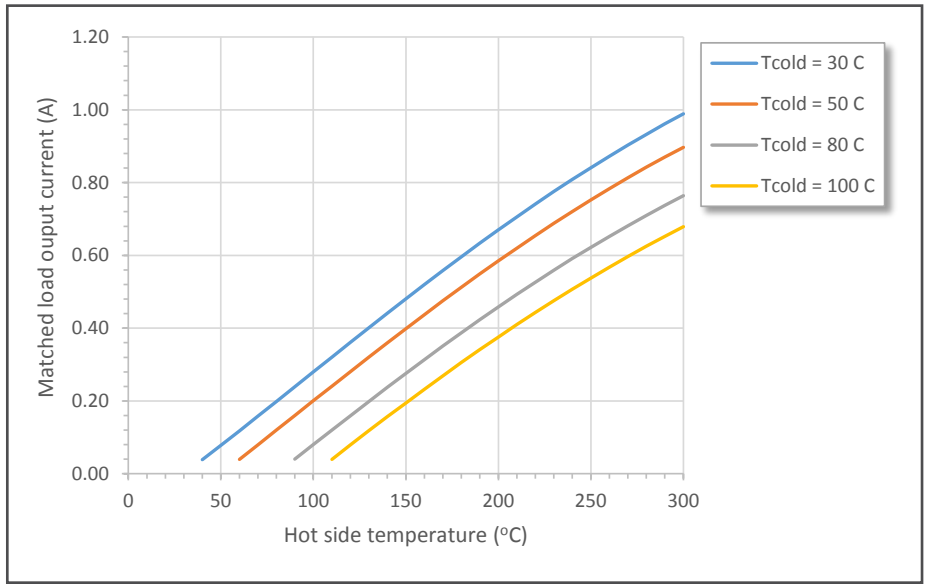

Note: Th = hot side temperature

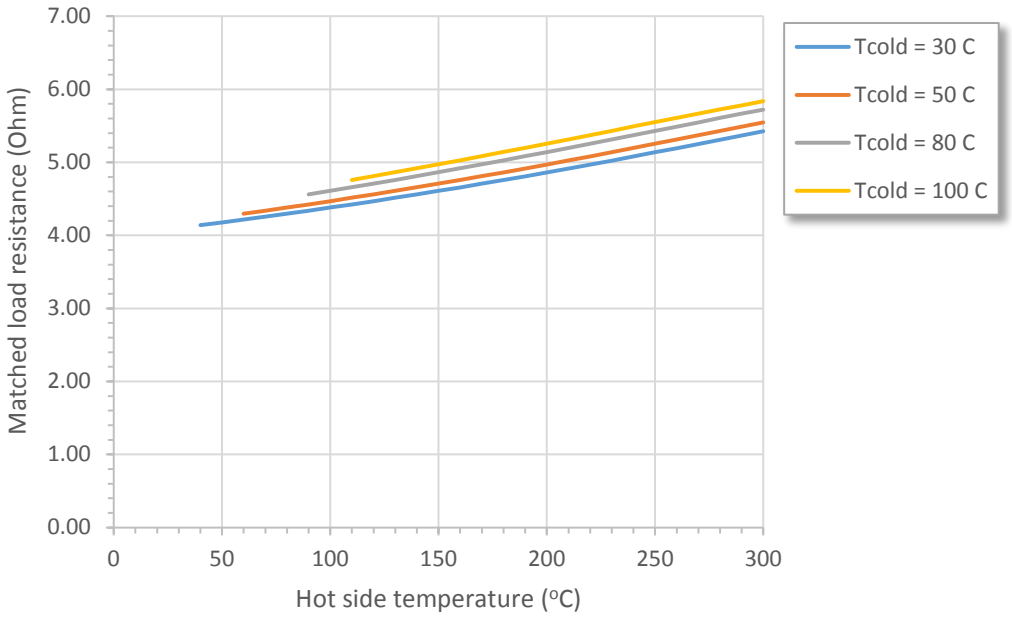

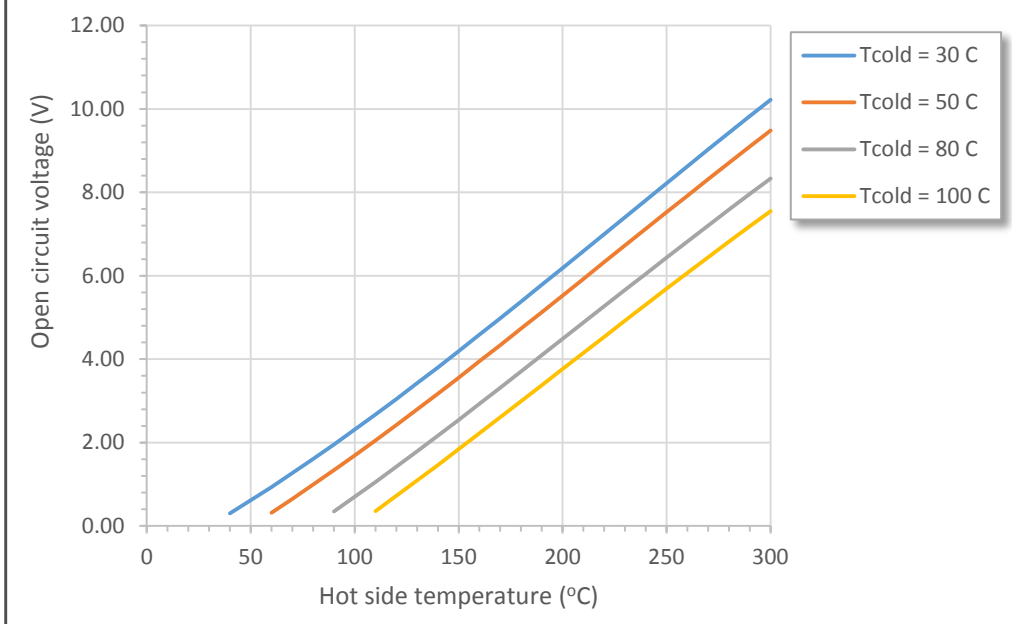

Note: Th = hot side temperature