
# EBC113

## Y-splitter

ZDO2H030MSS0000-00STGH040MSS

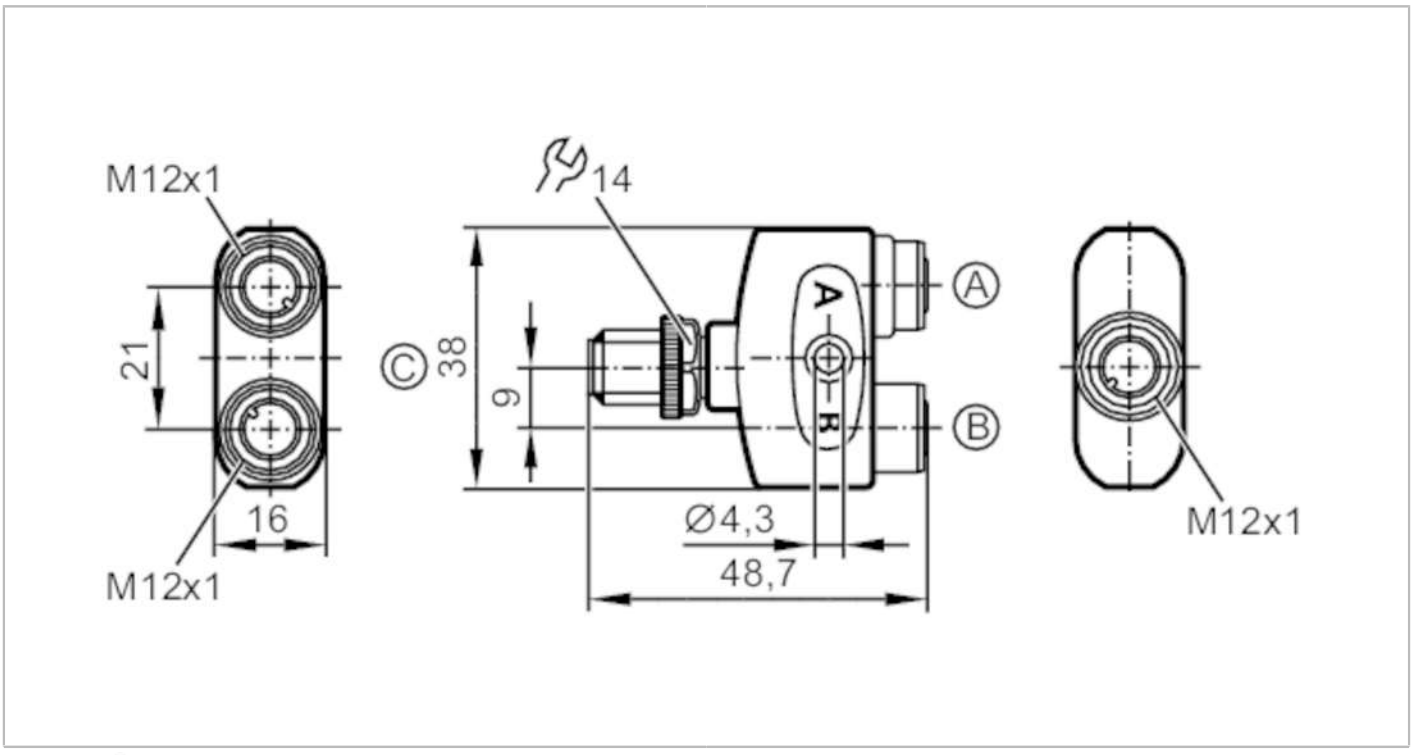



| | | |
|---|---|---|
| **Application** | | |
| Free from silicone | | yes |
| **Electrical data** | | |
| Operating voltage | [V] | < 250 AC / < 300 DC;  (cULus: 30 AC / 42 DC) |
| Protection class | | II |
| Max. current load per module/slot | [A] | 4 |
| Max. current load total | [A] | 4 |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -25...90 |
| Note on ambient temperature | | cULus: ...65 °C |
| Protection | | IP 65; IP 67; IP 68; IP 69K |
| **Mechanical data** | | |
| Weight | [g] | 35.4 |
| Materials | | housing: PA orange; Sealing: FKM |
| Material nut | | brass / brass |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |
| **Electrical connection - socket** | | |

Connector: 2 x M12; Locking: , brass, nickel-plated; Kontakte: gold-plated; Tightening torque: 0.6...1.5

# EBC113


## Y-splitter

ZDO2H030MSS0000-00STGH040MSS




## Electrical connection - plug

Connector: 1 x M12; Locking: , brass, nickel-plated; Kontakte: gold-plated; Tightening torque: 0.6...1.5




## Connection

