COMUS Group

COMUS International

Motion Sensor - Non Mercury - Normally Closed Contacts
Part Number : VS 801P
Product Data Sheet


PICTURE




✔RoHS Compliant

DIMENSIONS

Drawings not to scale
All dimensions in mm nominal

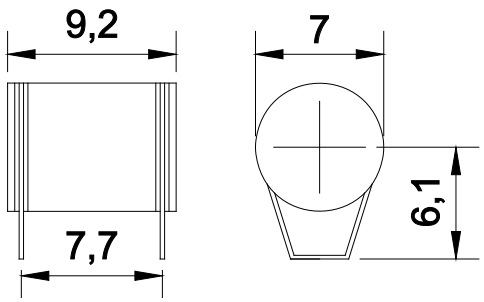

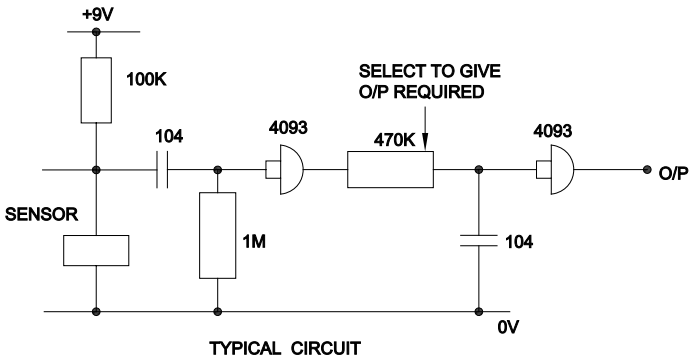

TYPICAL CIRCUIT

SPECIFICATION

Contact Form / Style		Normally Closed
Switching Voltage	Max Volts DC	9
Operating Temperature	Max Celcius	80°
Contacts		Gold plated
Case Material		Plastic
Activation Direction		Omni-directional

Applications Include

- Vibration Alarm System.
- Electronic toys .
- Security system switch.
- Consumer electronics.

Features

- Will detect contact closure or contact change sufficient to trigger and I.C
- Suitable for Alarms and non hazardous applications.
- All switches have gold plated ball and gold plated terminals for stability

Rev. No.	Revision Note	Date	Signature
1	Datasheet	24-02-12	ML

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : (1)973 777 6900 **www.comus-intl.com** **Fax: (1)973 777 8405**

Belgium: +32 (0) 12 390400 - Assemtech,UK: +44 (0) 1255 862236 - Germany:+49 (0)911 923 15 943

© 2012 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA