

AIR IMPACT WRENCH, ANGLE TYPE

Max. torque output CW 210N·m CCW 250N·m

Models **AIA4140**



Ideal for bolt installation and removal work in narrow places with a thin head (height 50 mm, diameter ϕ 55 mm), and for claw replacement for tractors and cultivators. A weight of 1.5 kg is achieved by using an aluminum alloy hammer case and a special reinforced resin body.


With output adjustment dial of 2 stages of forward and reverse directions.

Stepless output adjustment is also possible by the degree of pull of the switch.

The shape so easy to hold, soft grip to soften the vibration.




Output adjustment dial




Big hammer



AIA4140

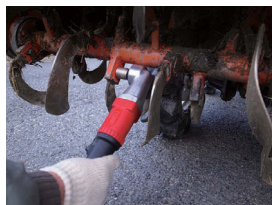

Example

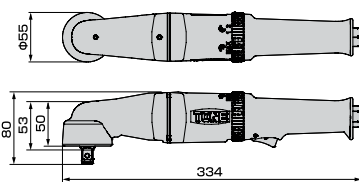

OPTION

Impact socket (4NV-○○) P.224

AIR IMPACT WRENCH, ANGLE SHORT TYPE

Max. torque output CW 400N·m CCW 400N·m

Models **AIAS4160**



Ideal for working in narrow head area or unlimited space. The direction of the switch can be changed to 360 °(fixed at 45 °).

Direction of exhaust can be changed 360 °. Arrange the hammer sideways and pursue efficiency.


High power in a compact body.

Stepless output adjustment is also possible by the degree of pull of the switch.

Ideal for bolt installation and removal and claw replacement for tractor cultivators.



Output adjustment dial



Big hammer




Direction of exhaust can be changed



Switch adjustment can be changed



AIAS4160

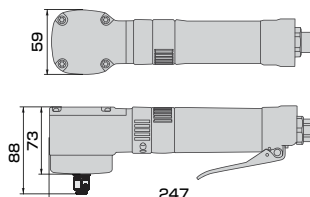

OPTION

Impact socket (4NV-○○) P.224

Accessories

Models	Plug	Oil	Side grip (Metal fittings and bolt are included)	L-type hex wrench	Instruction manual
AI4201	R1/4 (PT1/4)	1	—	—	○
AI4220	R1/4 (PT1/4)	1	—	—	○
AIA4140	R1/4 (PT1/4)	1	—	—	○
AIAS4160	R1/4 (PT1/4)	1	—	—	○



CW/CCW



• Tightening torque may differ by conditions.

