

AIR DOUBLE ACTION SANDER

Non-dust suction type

Velcro type

Models **ADS50M**

Great for repairing automobiles, iron plates, painted surfaces, FRP, woodworking.
Light & Compact(palm-sized), eccentric motion & rotational movement.
Eccentricity and sanding by rotation makes grinding unevenness less.
Easy to exchange paper and buff with velcro pad.
Air flow rate and the rotation speed can be changed by the regulator equipment.



The double action around which a pad revolves at random



Regulator can be used to change the air flow rate and adjust the rotational speed.




Example



ADS50M



Accessories

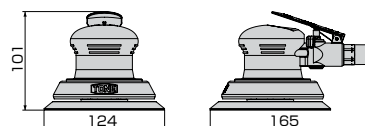

※ Sanding paper is not included with the product.
Please purchase a paper separately for standard use.


AIR DOUBLE ACTION SANDER

Vacuum type

Velcro type perforated type

Models **ADS50MS**

Dust suction type.
Great for repairing automobiles, iron plates, painted surfaces, FRP, woodworking.
Light & Compact(palm-sized), eccentric motion & rotational movement.
Eccentricity and sanding by rotation makes grinding unevenness less.
Easy to exchange paper and buff with velcro pad.
Air flow rate and the rotation speed can be changed by the regulator equipment.



The double action around which a pad revolves at random



Regulator can be used to change the air flow rate and adjust the rotational speed.




Example



ADS50MS



Accessories

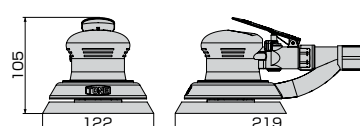

※ Sanding paper is not included with the product.
Please purchase a paper separately for standard use.

WARNING

- Please read instruction manual carefully before use.
- Use goggles and protecting devices.

Specification

Models	Pad mounting surface	Pad size (mm)	The orbit diameter (mm)	No-load speed (min ⁻¹ [rpm])	Air pressure (MPa)	Max. air consumption (ℓ /min)	Air intake	Air hose inner diameter (mm)	Weight (kg)	Qty./Carton (Generally)
ADS50M	Velcro type	φ 125	φ 5	12,000	0.62	※ ¹ (ntp) 379 (op) 57	Rc1/4 (PT1/4)	More than 10	0.7	1
ADS50MS	Velcro type Perforated type	φ 125	φ 5	12,000	0.62	※ ¹ (ntp) 379 (op) 57	Rc1/4 (PT1/4)	More than 10	0.74	1

※ Use a compressor with an air tank. The output of the compressor is recommended to be 3 kW (4 PS) or more.

※ 1 The maximum air consumption (ntp) indicates the air consumption converted to the standard condition (0 °C, 1 atm = 0.1MPa).
The maximum air consumption (op) indicates the air consumption under actual operating conditions (20 °C, 0.62MPa).

Accessories

Models	Plug	Oil	Wrench for pad exchanges	Dust collection hose	Dust collection bag	Binding band
ADS50M	R1/4 (PT1/4)	1	1	—	—	—
ADS50MS	R1/4 (PT1/4)	1	1	1	1	1

Repair kit

Repair pad for double action sander



RK-ADS50M



RK-ADS50MS

Models	Pad mounting surface	Pad size (mm)	Weight (g)	Qty./Carton (Generally)
RK-ADS50M	Velcro type	φ 125	99	3
RK-ADS50MS	Velcro type Perforated type	φ 125	99	3