YORK ABRASIVES

DATA SHEET

# 9.5x25mm Cartridge Roll Taper - Type CRT1 - Aluminium Oxide - P120

Aluminum oxide is the most commonly used abrasive. Best-suited for general purpose deburring and blending, it is tough, economical and fracture resistant. Commonly used on ferrous alloys, high-tensile materials and wood.

Cartridge rolls are used for weld flash removal, deburring, blending and polishing applications.

## Features and Benefits


- Spirally wound cloth rolls wear in use, constantly exposing new abrasive
- Tapered type which is ideal for angles, corners and irregular or concave surfaces

## Technical Specifications

- Size (DiaxL): 9.5mm x 25mm
- Grit: P120
- Maximum operating speed: 22,000rpm
- Mandrel type: CRM4



(Image for illustration purpose only)

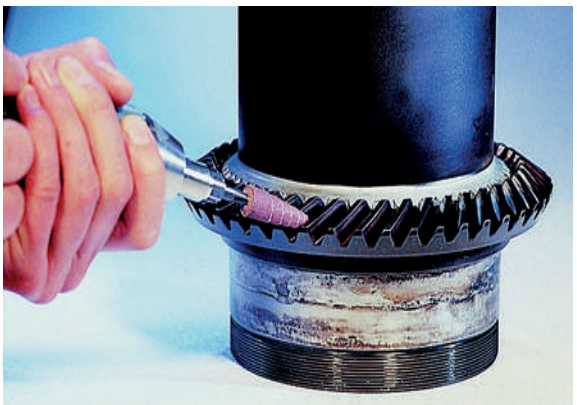

**Note.**
An appropriate steel mandrel must be used to secure the abrasive to the tool.

Order Code
**YRK-205**
**-7320K**

© Copyright 2021 - Cromwell Ltd