


Universal Small Type SFE series



●SFE-1-2

Considerate simple color design.
The bottom side is a steel plate with anti-slip mat.
The partition board to prevent simultaneous stamping on the two pedals is integrated on the switch.
Gather the lead wires needed for two loops (1c X 2) into a 6-core rubber covered insulation wires to facilitate the treatment of lead wires.

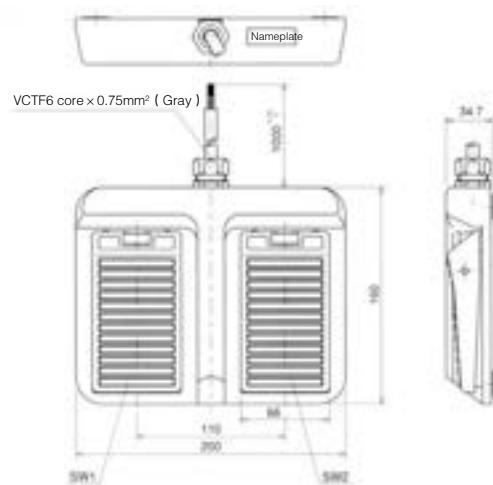

SFE-1-2

■Major Parameters

Model	Rating	Contact Structure	Action		Insulation Rubber Soft Wire	Action Force (N)	Built-in Switch	Weight (g)
			Instantaneous	Interactive				
SFE-1-2	AC250V 6A	1c×2	●		VCTF 6 core x 0.75mm² x 1m	29.4	V type micro switch	1150

■Major Raw Materials

Model	Main Body/ Protection Cover	Return Spring	Transmission Shaft	Cable Clamp	Color/ Paint Color
SFE-1-2	Aluminum die casting	SWP (Piano wire)	SS400 (Steel)	Nylon 66	Milky white,, equivalent to R3-348*

[Universal Parameters]

- Insulation resistance/ over DC500V 100MΩ.
- Voltage withstanding/AC1500V/min
- Enbient temperature: -5~40°C
- Enbient relative humidity/ below 85%RH.

*Refer to R version standard color card published by Japan Paint Manufacturers Association.

Universal Mini Type SFK series



SFK-1



SFKF-1



SFKB-1(Back Stamping)

●SFK-1

Polycarbonate resin is used for the main body and the protection cover. Milky white (the main body) and gray (the protection cover) color assortment.

●SFK-1H

An interactive universal foot switch that combines our innovative interaction device and S type micro switch.
ABS resin and polycarbonate resin are used for the main body and the protection cover. Black (the main body) and gray (the protection cover) color assortment.

●SFKF-1

As a sister product of SFK-1, SFKF-1 pursues economical design.
Economical ABS resin is used for the main body and the protection cover.

●SFKB-1

SFKB-1 inherits outstanding operation performance of SFK-1 and adopts the back stamping operation design.
Economical ABS resin is used for the main body and the protection cover.

■Major Parameters

Model	Rating	Contact Structure	Action		Insulation Rubber Soft Wire	Action Force (N)	Built-in Switch	weight (g)	
			Instantaneous	Interactive					
SFK-1	AC250V 6A	1c	●		VCTF 3 core x 0.75mm² x 1.5m	9.8	V type micro switch	290	
SFK-1H	AC250V 3A	1a		●	VCTF 2 core x 0.75mm² x 1m		S type micro switch	250	
SFKF-1	AC250V 6A	1a	●				240		
SFKB-1	AC250V 6A	1a	●		7.8		V type micro switch	250	


■Major Raw Materials

Model	Main Body/ Protection Cover	Return Spring	Transmission Shaft	Bottom Plate	Color/ Paint Color
SFK-1	Polycarbonate resin	SWP (Piano wire)	SS400 (Steel)	SPCC (Steel)	Protection cover: gray. Main body: milky white
SFK-1H	ABS resin/ Polycarbonate resin				Protection cover: gray. Main body: black
SFKF-1	ABS resin				Protection cover: black. Main body: black
SFKB-1					

[Universal Parameters]

- Insulation resistance/ over DC500V 100MΩ.
- Voltage withstanding/AC1500V/min
- Enbient temperature: -5~40°C
- Enbient relative humidity/ below 85%RH.

●External dimension of SFK-1, SFK-1H and SFKF-1.

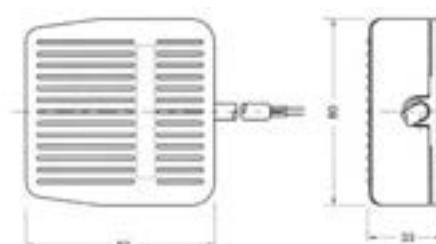

●External dimension of SFKB-1.