

Interchangeable Socket


SOCKET FOR HAND TOOL

	Inlet Drive (Female)	From Torque Tool			
		6.35	9.53	12.7	19.05
From Bolt	Width Across Flats (B)	2H	3H	4H	6H
	8	201			
	10	202	210		
	12	203	211		
	13	204	212		
	14		213	220	
	16		216	227	
	17		214	221	
	18		217	228	
	19		215	222	
	21			229	237
	22			223	230
	24			224	231
	27			225	232
	30			226	233
	32				234
	34				236
	36				235
	41				
	46				
	50				
	55				



SOCKET

SOCKET FOR HAND TOOL

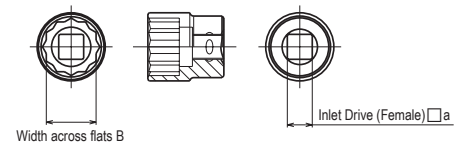

How to Order (Hand Tools)

SOCKET

Indicate model name and Part #

[Ex.] SOCKET **2H-10** **202**
 Socket Inlet sign Purpose sign Width across flats Part #

ADAPTER

Indicate model name and Part #

[Ex.] ADAPTER **2H-3** **270**
 Inlet Sign (Female) Purpose sign Inlet sign (Male) Part #


ADAPTER FOR HAND TOOL

	Inlet Drive (Female)	From Torque Tool			
		6.35	9.53	12.7	19.05
To Socket	Inlet Drive (Male)	2H	3H	4H	6H
	6.35 (2)	270	271		
	9.53 (3)	270		273	
	12.7 (4)	277	272		275
	19.05 (6)			274	
	25.4 (8)				276



ADAPTER


ADAPTER FOR HAND TOOL



SOCKET FOR PNEUMATIC TOOL

	Inlet Drive (Female)	From Torque Tool		
		9.53	12.7	25.4
From Bolt	Width Across Flats (B)	3P	4P	8P
	10	250		
	12	251		
	13	252		
	14	253	260	
	16	255	264	
	17	254	261	
	18		265	
	19		262	
	21		266	
	22		263	
	32			303
	34			304
	36			305
	41			306
	46			307
	50			308
	55			309

SOCKET FOR PNEUMATIC TOOL



SOCKET

How to Order (Air Tools)

SOCKET

Indicate model name and Part #

[Ex.] SOCKET **3P-10** **250**
 Socket Inlet sign Purpose sign Width across flats Part #

ADAPTER

Indicate model name and Part #

[Ex.] ADAPTER **3P-4** **290**
 Inlet Sign (Female) Purpose sign Inlet sign (Male) Part #

Note O-ring and pin are included.


ADAPTER FOR PNEUMATIC TOOL

	Inlet Drive (Female)	From Torque Tool			
		9.53	12.7	19.05	25.4
To Socket	Inlet Drive (Male)	3P	4P	6P	8P
	9.53 (3)	290	291		
	12.7 (4)	290		293	
	19.05 (6)		292		295
	25.4 (8)			294	



ADAPTER

ADAPTER FOR PNEUMATIC TOOL




SOCKET FOR POWER AND HAND TOOL

	Inlet Drive (Female)	From Torque Tool				
		6.35	6.35	9.53	12.7	19.05
From Bolt	Width Across Flats (B)	2CS	2C	3C	4C	6C
	2.5	420	430			
	3	421	431	440		
	4	422	432	441		
	5			442		
	6			443	450	
	8				451	
	10				452	
	12				453	
	14				454	460
	17					461
	19					462



SOCKET FOR HEX HEAD CAP SCREWS

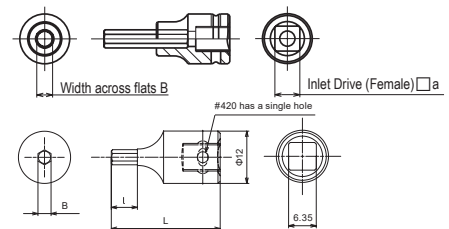

Parts Name	Catalog No.	B	L	l
Socket 2CS-2.5	420	2.5	25	5.5
Socket 2CS-3	421	3		6
Socket 2CS-4	422	4		6.5
Socket 2C-2.5	430	2.5	40	18
Socket 2C-3	431	3		
Socket 2C-4	432	4		20

Note 1. Sockets with inlet drive sizes from 9.53 to 19.05 include one O-ring and one pin each.
 2. Inlet 6.35 sockets are not designed with a through-hole.