




# Collaboration at your fingertips in 4K

Dell 65 4K Interactive Touch Monitor | **P6524QT**

The world's # 1 monitor company\*

\* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q1 2023. From 2014 to 2022.

# Collaboration at your fingertips in 4K

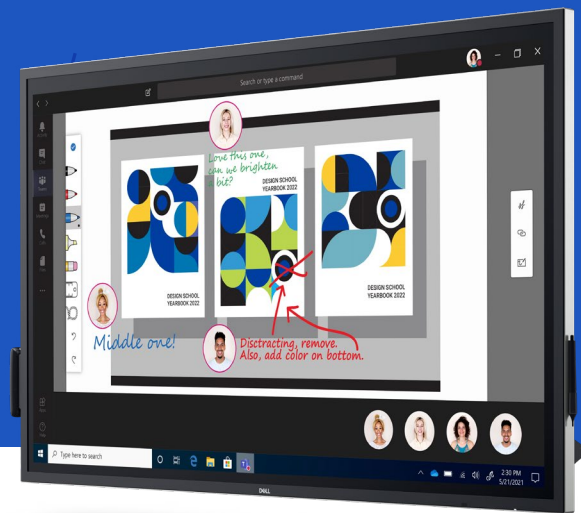

**Real-time collaboration on this 65" 4K interactive touch monitor.**

## Bringing teams together

Actively engage with your teammates whether they are in the room or at a remote location with this brilliant 4K 65" monitor with 20-point touch, built-in dual 20W speakers and dual-tip stylus.

## Convenient connectivity, setup and management

Comprehensive connectivity options including USB-C®, easy installation and network manageability.

## Exclusive to Dell. Inclusive for all.

Exclusive Dell Screen Drop feature, designed to improve reachability for users working from different heights.

# Connect. Present. Collaborate.

## All-in-one convenience

Seamlessly integrate an optional Dell OptiPlex Micro and allow IT to select the best option for varying business needs.

## Manage your meeting spaces

With RS232, RJ45 and HDMI CEC ports, you can use remote management tools to maintain and control your Large Format monitor with a network control system.

## Connect to productivity

Make your monitor a productivity hub with extensive connectivity options including HDMI, DP and USB-C (with up to 90W of power delivery) that delivers power, audio and video — all in one clutter-free setup.

## Striking presentations

No matter where you stand or sit, see consistent colors across the screen thanks to the wide viewing angle enabled by In-Plane Switching (IPS) technology.

## Clearly captivating


Experience exceptionally sharp 4K images and text with monitor scaling technology. ComfortView and anti-glare, anti-smudge coatings deliver greater legibility and a better extended viewing experience.

## Instant engagement

With InGlass™ 20-point touch capability, multiple users can interact with the screen at the same time.

## Write in style

Mimicking a more natural writing tool, the dual-tip stylus has an ergonomic, easy-grip design, a fine writing tip and a precise eraser. It also magnetically attaches to the side of the display, so it's never misplaced.

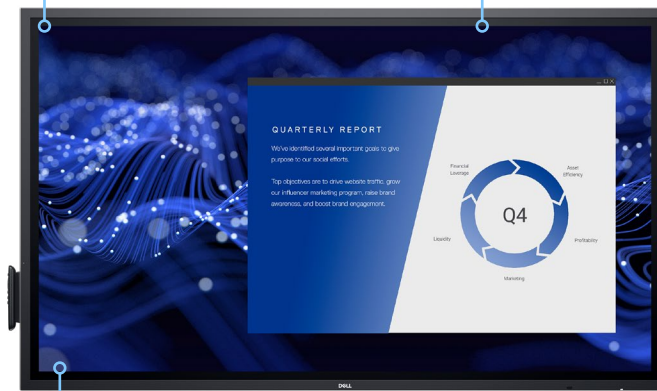

## Seamless integration with Dell Meeting Space Solutions

This interactive touch monitor has been tested and validated to work with complete conference room ecosystems that include high quality audio, video and room control, powered by OptiPlex Micro.

**Environmental standards**  
ENERGY STAR® and EPEAT® (Silver).

**Exclusive Dell Screen Drop**  
Improve reachability for users of different heights using Dell Screen Drop.<sup>1</sup>

## Collaboration at your fingertips

Annotate with your fingers and erase with the palm of your hand. Palm rejection allows users to rest their hands naturally onscreen without unwanted marks.

▶ Click the image or [here](#) to play the Dell 65 4K Interactive Touch Monitor - P6524QT video.

# Dell Display Manager



## Improved multitasking

Organize your screen with Easy Arrange and save profiles with Easy Arrange Memory.

## Easy navigation

Share a single keyboard, mouse and monitor between multiple PCs with USB KVM wizard.<sup>1</sup> Quickly switch between PCs with the quick-access menu or hot keys.

## Smooth deployment

Manage your fleet of monitors with features that are automatic, comprehensive and compatible with several tools.<sup>2</sup>

## Convenient customization

Quickly access your favorite features and functions with the menu launcher and hot keys.

[Download Dell Display Manager](#)

<sup>1</sup> KVM (keyboard, video, mouse) is available on select monitors only. For monitors that don't support USB KVM, the input source feature is an alternative. You can share multiple input sources to one monitor, but you cannot share one keyboard and mouse.

<sup>2</sup> Tools including SCCM/Intune and Command Line Interface scripts.



# Sustainability on Dell Monitors

## Environmental standards

This monitor uses 85% PCR (Post-consumer Recyclable) plastic in the design<sup>1</sup>, 90% recycled aluminum, and meets the latest environmental standards such as ENERGY STAR<sup>®</sup> and is EPEAT<sup>®</sup> Silver<sup>2</sup> registered.

## Eco-conscious packaging

Dell commercial monitors ship in select packaging components made with up to 90% recycled materials.<sup>3</sup>

## Energy conservation

Save energy when your monitor is not in use with PowerNap<sup>4</sup>, a feature that dims or puts your monitor to sleep when it's not in use.

<sup>1</sup> By weight of the total weight of plastic parts in product. Excludes printed circuit boards, labels, cables, connectors, electronic components, optical components, ESD components, EMI components adhesives, and coatings.

<sup>2</sup> EPEAT registered where applicable. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country.

<sup>3</sup> Applies to outer box and paper cushion packaging materials, based on internal analysis, October 2022.

<sup>4</sup> Enabled by Dell Display Manager



## Recommended Accessories



### Dell OptiPlex Micro<sup>1</sup>

Dell OptiPlex Micro enables an all-in-one like experience when combined with conferencing software. It allows video conferencing, whiteboarding, presentations and other applications to be run directly on the monitor or a very easy-to-use meeting experience.



### Chief Large Fusion LSA1U Fixed Wall Display Mount

This robust mount with quick installation features secures heavy displays to protect user investments. Plumb adjustment helps vertically align the display.




### Logitech MeetUp Conference Camera

This all-in-one HD conference camera features a compact design, extra-wide field of view, motorized wide-angle lens and integrated beamforming audio specifically designed for small rooms. RightSight technology automatically adjusts camera position and zoom so everyone can be seen.

<sup>1</sup> Compatible with OptiPlex 7000 XE MFF, OptiPlex 7080 XE MFF.

# Ports & Slots

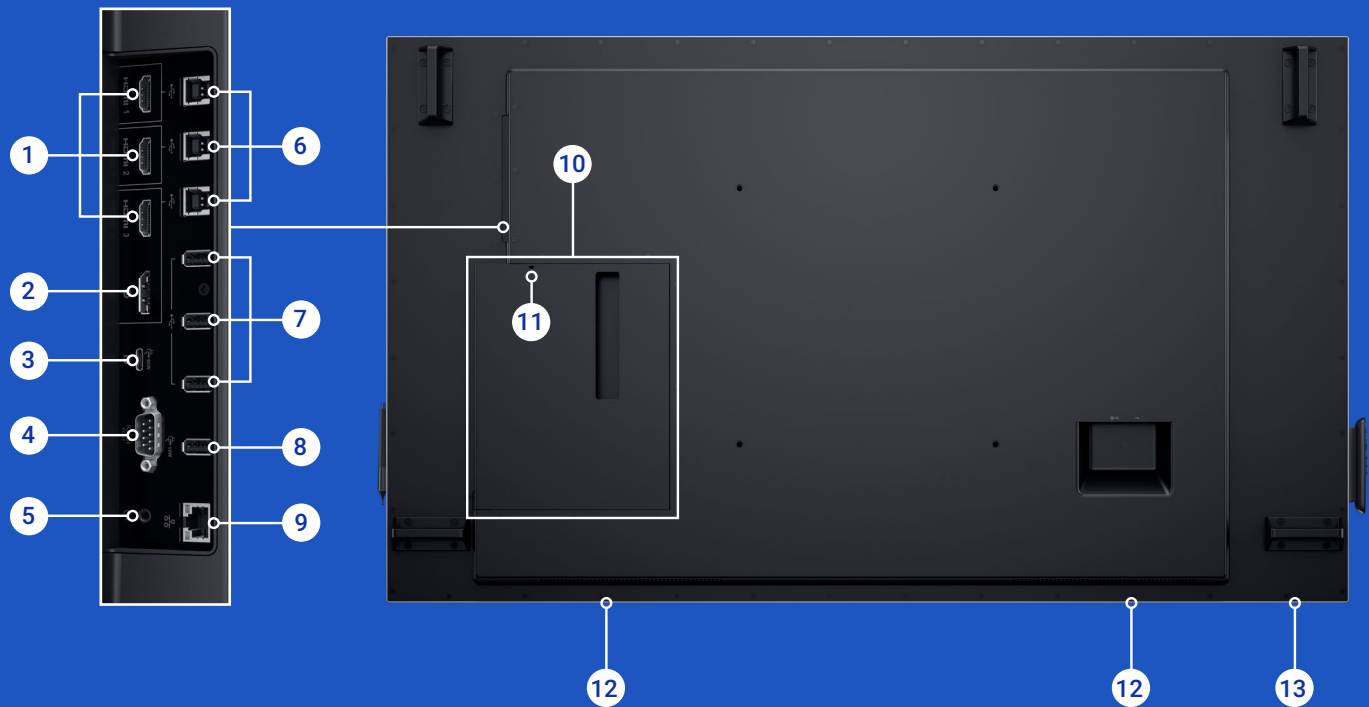

- 1 HDMI (3)
- 2 DisplayPort
- 3 USB Type-C / DisplayPort
- 4 RS232
- 5 Audio line-out<sup>1</sup>
- 6 USB 3.1 upstream (3)
- 7 USB 3.1 downstream (3)

- 8 USB charging port
- 9 RJ45
- 10 OptiPlex holder
- 11 Security lock slot
- 12 Speakers
- 13 Power on/off button

<sup>1</sup> The audio line-out port does not support headphones.

| FEATURE                                    | TECHNICAL SPECIFICATION                                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MODEL                                      | Dell 65 4K Interactive Touch Monitor - P6524QT                                                                                                                                                                                                                                                                                                       |
| DIAGONAL VIEWING SIZE                      | 163.906 cm (64.53 inches)                                                                                                                                                                                                                                                                                                                            |
| PRESET DISPLAY AREA (H X V)                | 1428.5 mm x 803.5 mm (56.24 inches x 31.63 inches)                                                                                                                                                                                                                                                                                                   |
| PANEL TYPE                                 | IPS                                                                                                                                                                                                                                                                                                                                                  |
| DISPLAY SCREEN COATING                     | 7H, Anti-Smudge, Anti-Glare                                                                                                                                                                                                                                                                                                                          |
| MAXIMUM PRESET RESOLUTION                  | 3840 x 2160 @ 60Hz                                                                                                                                                                                                                                                                                                                                   |
| VIEWING ANGLE                              | 178° vertical / 178° horizontal                                                                                                                                                                                                                                                                                                                      |
| PIXEL PITCH                                | 0.372 mm x 0.372 mm                                                                                                                                                                                                                                                                                                                                  |
| PIXEL PER INCH (PPI)                       | 68                                                                                                                                                                                                                                                                                                                                                   |
| CONTRAST RATIO                             | 1300 to 1 (typical)                                                                                                                                                                                                                                                                                                                                  |
| ASPECT RATIO                               | 16:9                                                                                                                                                                                                                                                                                                                                                 |
| BACKLIGHT TECHNOLOGY                       | LED                                                                                                                                                                                                                                                                                                                                                  |
| BRIGHTNESS                                 | 350 cd/m <sup>2</sup> (typical)                                                                                                                                                                                                                                                                                                                      |
| RESPONSE TIME                              | 9 ms gray to gray in Normal mode                                                                                                                                                                                                                                                                                                                     |
| HDR READY                                  | N/A                                                                                                                                                                                                                                                                                                                                                  |
| CONNECTIVITY                               | <ul style="list-style-type: none"> <li>• 1 x DP 1.2</li> <li>• 1 x USB Type-C</li> <li>• 3 x HDMI</li> <li>• 3 x USB 3.1 downstream port</li> <li>• 1 x USB 3.1 downstream port with USB BC1.2 charging capability</li> <li>• 3 x USB 3.1 upstream port</li> <li>• 1 x Analog 2.0 audio line out</li> <li>• 1 x RJ45</li> <li>• 1 x RS232</li> </ul> |
| ADJUSTABILITY                              | N/A                                                                                                                                                                                                                                                                                                                                                  |
| PBP / PIP                                  | N/A                                                                                                                                                                                                                                                                                                                                                  |
| KEYBOARD, VIDEO AND MOUSE (KVM)            | N/A                                                                                                                                                                                                                                                                                                                                                  |
| DAISY CHAIN AVAILABILITY                   | N/A                                                                                                                                                                                                                                                                                                                                                  |
| AUDIO OUTPUT                               | Yes                                                                                                                                                                                                                                                                                                                                                  |
| BUILT-IN SPEAKER                           | 2 x 20W                                                                                                                                                                                                                                                                                                                                              |
| DELL DISPLAY MANAGER COMPATIBILITY         | Yes                                                                                                                                                                                                                                                                                                                                                  |
| SPECIFICATIONS - SERVICE / SUPPORT DETAILS | 3-Year Advanced Exchange Service                                                                                                                                                                                                                                                                                                                     |

| FEATURE                                 | TECHNICAL SPECIFICATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| COLOR GAMUT                             | 72% NTSC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| HEIGHT WITHOUT STAND                    | 892.92 mm (35.15 in.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| WIDTH WITHOUT STAND                     | 1517.88 mm (59.76 in.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| DEPTH WITHOUT STAND                     | 78.7 mm (3.10 in.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| WEIGHT (PANEL ONLY - FOR VESA MOUNT)    | 45.2 kg (99.65 lb)                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| WEIGHT (WITH STAND ASSEMBLY AND CABLES) | 46.4 kg (102.29 lb)                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| WEIGHT (WITH PACKAGING)                 | 55.3 kg (121.92 lb)                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| SECURITY                                | Security lock slot (cable lock sold separately) (based on Kensington Security Slot™)                                                                                                                                                                                                                                                                                                                                                                                                             |
| COMPLIANT STANDARDS                     | <ul style="list-style-type: none"> <li>• ENERGY STAR® certified monitor</li> <li>• RoHS-compliant</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                     |
| FLAT PANEL MOUNT INTERFACE              | VESA mounting holes (400 mm x 400 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| TEMPERATURE RANGE                       | Operating: 0°C to 40°C (32°F to 104°F)<br>Non-operating: -20°C to 60°C (-4°F to 140°F)                                                                                                                                                                                                                                                                                                                                                                                                           |
| HUMIDITY RANGE                          | Operating: 10% to 80% (non-condensing)<br>Non-Operating: 5% to 90% (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                              |
| ALTITUDE                                | Operating: 5000 m (16404 ft) max<br>Non-Operating: 12192 m (40000 ft) max                                                                                                                                                                                                                                                                                                                                                                                                                        |
| VOLTAGE REQUIRED                        | Input: 100-240 VAC / 50 or 60 Hz ± 3 Hz / 6.0 A (maximum)<br>Output: 100-240 VAC / 50 or 60 Hz ± 3 Hz / 2.0 A (maximum)                                                                                                                                                                                                                                                                                                                                                                          |
| POWER CONSUMPTION NORMAL OPERATION      | 0.3 W (Off Mode) <sup>1</sup><br>0.4 W (Standby Mode) <sup>1</sup><br>1.0 W (Networked standby Mode) <sup>1</sup><br>101.0 W (On Mode) <sup>1</sup><br>370 W (Maximum) <sup>2</sup><br>80.11 W (Pon) <sup>3</sup><br>Not Applicable (TEC) <sup>3</sup>                                                                                                                                                                                                                                           |
| WHAT'S INCLUDED                         | Monitor<br>1 x OptiPlex holder<br>1 x Remote control and batteries (AAAx2)<br>1 x Remote control holder<br>2 x Stylus<br>3 x Wire saddle<br>3 x Camera wire saddle<br>2 x Stylus nib<br>1 x Power cable<br>1 x Power cable for connecting OptiPlex system to display<br>1 x USB Type-C cable<br>1 x HDMI cable<br>1 x DP Cable (DP to DP)<br>1 x USB 3.1 upstream cable<br>FlatFrog Board Software download instruction<br>Quick start guide<br>Safety, Environmental and Regulatory Information |

<sup>1</sup> As defined in EU 2019/2021 and EU 2019/2013.

<sup>2</sup> Max brightness and contrast setting with maximum power loading on all USB ports.

<sup>3</sup> Pon: Power consumption of On Mode as defined in Energy Star 8.0. TEC: Total energy consumption in kWh as defined in Energy Star 8.0 version.

# Steadfast reliability

As the No. 1 monitor company worldwide\*, we take pride in our unyielding commitment to quality and the utmost in customer satisfaction.

## Advanced Exchange Service

This monitor comes with a 3-year Advanced Exchange Service<sup>1</sup> so that if a replacement becomes necessary, it will be shipped to you the next business day during your 3-year Limited Hardware Warranty.<sup>2</sup>

## ProSupport

Upgrade to 24x7 specialized technical phone support with the Dell ProSupport option.<sup>3</sup>



\* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q1 2023. From 2014 to 2022.

1 Advanced Exchange: Dell will send you a replacement monitor the next business day in most cases, if deemed necessary after phone/online diagnosis. Shipping times may vary by location and for monitors 55" and above. Fee charged for failure to return defective unit. See [dell.com/servicecontracts/global](https://www.dell.com/servicecontracts/global).

2 For copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see <https://www.dell.com/warranty>.

3 Availability varies, please visit [www.dell.com/support](https://www.dell.com/support) for details. In some countries, hours for in-region support may vary. Support after local business hours may be provided in a language other than the local language.

Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2023 Dell Inc. or its subsidiaries. All Rights Reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.