

Makita Laser Series

Line-Point Laser
SK103PZ



Cross Line Laser
SK104Z



Laser Level
SKR200Z



Cross Line Laser
SK106D / SK105D



Accessories

Laser Receiver LDG-3
TK0LDG301F
SK312GD / SK209GD



Laser Receiver LDX1
LE00855702
SK106GD / SK105GD
SK106D / SK105D



Large soft bag
832173-9
SK106GD / SK105GD
SK106D / SK105D



SK106GD
BL1021B x2
DC105B
Wall Mount
Adapter

Adapter for USB
ADP05



Power supply cable
199006-4
SK312GD / SK209GD
199178-5
SK106GD / SK105GD



Hand strap set
199007-2



Min tripod
TK0LM1001F



Tripod 1800
TK0LM4001F



Tripod 2900
TK0LM5030F



Wall mount
TK000ET03F
SK312GD / SK209GD



Wall mount
Wall and ceiling adapter for universal
applications with height adjustment
function

LE00855706
SK106GD / SK105GD
SK106D / SK105D



Rechargeable Green Multi Line Laser
SK312GD / SK209GD

	SK312GD	SK209GD
Measuring range	-	-
Measuring range w/ detector	-	-
Leveling accuracy	±1 mm / 10 m	±1 mm / 10 m
Self-leveling range	±2°	±2°
Laser fan angle	Horizontal: 110° Vertical: 130°	Horizontal: 110° Vertical: 130°
Number of laser lines	3	3
Laser type	Laser class 2: 515 nm	Laser class 2: 515 nm
Operating temperature	-10 - 40 °C	-10 - 40 °C
Tripod thread	5/8"	5/8"
Operating Time (Approx. Hours)	10-28	15-40
Dimensions (L x W x H)	w/ BL1016/BL1021B: 122x110x225 mm w/ BL1041B: 122x130x225 mm	w/ BL1016/BL1021B: 122x110x225 mm w/ BL1041B: 122x130x225 mm
Net weight	1.5 - 1.6 kg (3.3 - 3.5 lbs)	1.5 - 1.6 kg (3.3 - 3.5 lbs)

Standard Equipment: Laser Viewing Glass, Shoulder Strap, Storage Case
Dimensions (with carry handle in retracted position)

Rechargeable Green Cross Line Laser
SK106GD / SK105GD

	SK106GD	SK105GD
Up to: 35 m	Up to: 35 m	Up to: 35 m
Up to: 80 m	Up to: 80 m	Up to: 80 m
±3 mm / 10 m	±3 mm / 10 m	±3 mm / 10 m
±4°	±4°	±4°
Horizontal: 180°	Horizontal: 180°	Horizontal: 180°
Vertical: 170°	Vertical: 160°	Vertical: 160°
2	2	2
Laser class 2: 525 nm	Laser class 2: 525 nm	Laser class 2: 525 nm
-10 - 50 °C	-10 - 50 °C	-10 - 50 °C
1/4" / 5/8"	1/4" / 5/8"	1/4" / 5/8"
7 - 20	7 - 20	7 - 20
w/ BL1016/BL1021B: 138x64x102 mm (5-7/16"x2-1/2"x4")	w/ BL1016/BL1021B: 1138x64x102 mm (5-7/16"x2-1/2"x4")	w/ BL1016/BL1021B: 1138x64x102 mm (5-7/16"x2-1/2"x4")
w/ BL1041B: 157x64x102 mm (6-3/16"x2-1/2"x4")	w/ BL1041B: 157x64x102 mm (6-3/16"x2-1/2"x4")	w/ BL1041B: 157x64x102 mm (6-3/16"x2-1/2"x4")
0.69 - 0.85 kg (1.5 - 1.9 lbs.)	0.67 - 0.84 kg (1.5 - 1.9 lbs.)	0.67 - 0.84 kg (1.5 - 1.9 lbs.)

Standard Equipment: Soft bag, Adapter, Target Plate

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201806



Green Laser Series
SK312GD / SK209GD
SK106GD / SK105GD

Satisfy Professional's Needs


High brightness green
laser for increased
visibility at bright site



Rechargeable Green Multi Line Laser


Horizontal / 3-Vertical lines

SK312GD



Horizontal / 2-Vertical lines


SK209GD



Rechargeable Green Cross Line Laser


Cross line + Point

SK106GD



Cross line

SK105GD



12V max Lithium-ion Battery




Green Laser Series

Powered by the following 12V max slide CXT Li-ion batteries
1.5Ah : BL1016, 2.0Ah : BL1021B, 4.0Ah : BL1041B



SK312GD / SK209GD

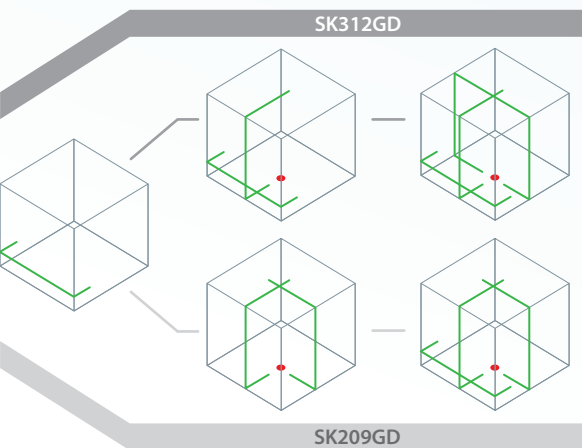

Long continuous operation

*at max output

SK312GD / SK209GD


10 / 15h BL1016 1.5Ah	14 / 20h BL1021B 2.0Ah	28 / 40h BL1041B 4.0Ah
------------------------------------	-------------------------------------	-------------------------------------



Large handle
prevents the tool from falling.

Adjustment screw leg
Horizontal line can be adjusted at any places

Leveling accuracy
±1mm/10m

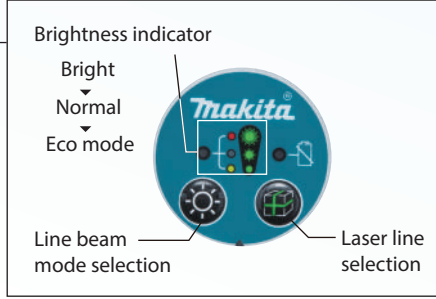


Line beam mode memory

When the power is turned ON, the laser beam mode will be the same mode as the last time turned OFF.

Fine adjustment knob
fine-adjusted from either side by turning fine-adjustment knob

XPT
Extreme Protection Technology
For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.

SK106GD / SK105GD

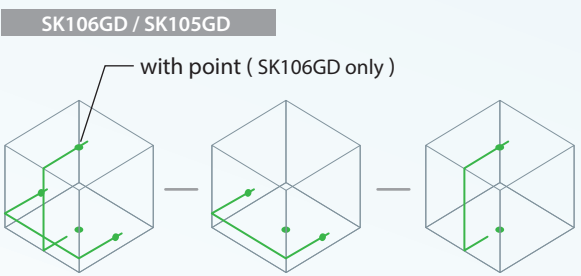


Long continuous operation

*at max output

SK106GD / SK105GD

7 / 7h BL1016 1.5Ah	10 / 10h BL1021B 2.0Ah	20 / 20h BL1041B 4.0Ah
----------------------------------	-------------------------------------	-------------------------------------

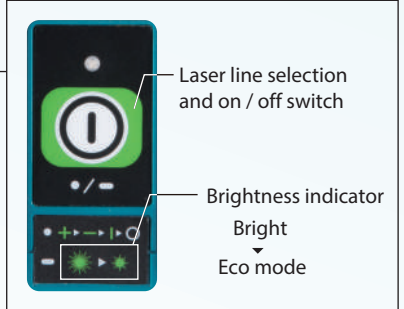

Adapter with magnet

for SK105GD / SK105D



for SK106GD / SK106D




Leveling accuracy
±3mm/10m

SK312GD / SK209GD

Shock absorbing construction

prevents the tool from vibration during transport

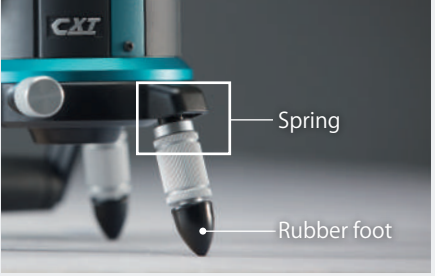


Aluminum carrying case



ALL PRODUCTS

High brightness green laser


for increased visibility at bright site

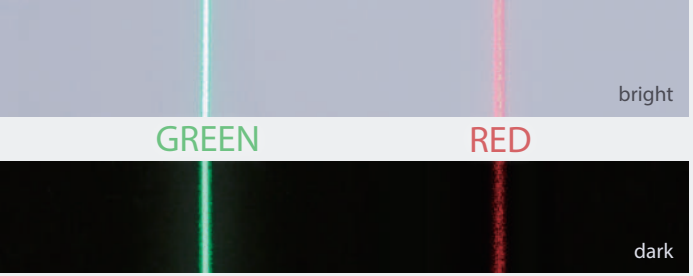

SK106GD / SK105GD

Pendulum lock

Pendulum lock enables slope incline applications for increased versatility



Soft bag

