



Cordless Impact Wrench TW004G / TW005G 1/2" (12.7 mm)



40V Li-ion max

Max fastening
torque

350
N·m

Compact yet with Increased max fastening torque

TW004G

C ring



TW005G

Pin detent



40Vmax series movie

This movie was filmed in Japan.
Models and specs may vary by country.



Increased max fastening torque



Max fastening torque

350
N·m

Nut-busting torque

630
N·m

*1 Fastening torque at 6 seconds after seating, when tightening M16 (grade F10T) high strength friction grip bolt in 4 (Max) mode



Auto-stop system available both in forward / reverse rotation modes


3 modes of reaction time for automatic stop available both in forward and reverse rotation modes.



	Forward	Reverse
mode 1	The tool stops automatically as soon as it has detected the first impact blow.	The tool stops automatically as soon as it has stopped impact blow.
mode 2	The tool stops automatically approximately 0.5 seconds after the moment it has detected the first impact blow.	The tool stops automatically approximately 0.2 seconds after the moment it has stopped impact blow.
mode 3	The tool stops automatically approximately 1.0 second after the moment it has detected the first impact blow.	The tool automatically slows down to 300min ⁻¹ after the moment it has stopped impact blow.

Electronic 4 stage impact power selection


Both in forward and reverse rotation modes, max / hard / medium / soft impact power can be selected to suit the material of workpiece or screw type simply by pushing a button.



Full speed mode lamp

Trigger switch with full speed mode

- Variable speed mode can be changed to full speed mode simply by pushing a button.
- Because in full speed mode, the trigger travel is shorter than in variable speed mode, the full speed is quickly reached, reducing hand and finger fatigue from trigger pull.



Compact and High Torque

Compact design with a short overall length of 144mm



Excellent performance in continuous heavy operation due to Optimum power supply system

Able to use 2 batteries consecutively



Number of bolts consecutively tightened under heavy load*2

approx


560
bolts



*2 Continuous tightening of M16 bolts in an environment with a temperature at 40 ° C / using two BL4025 batteries

Relation Between Fastening torque and Fastening time when tightening each size of bolt in each Fastening torque mode with a fully charged battery.

The time axis on the charts below indicates the fastening time after the bolt is seated.

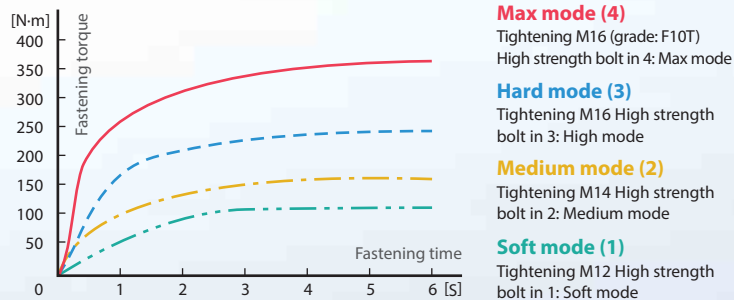

No load speed (min⁻¹)


Max mode (4): 0 - 3,200
Hard mode (3): 0 - 2,600
Medium mode (2): 0 - 1,800
Soft mode (1): 0 - 1,000

Impacts per minutes (min⁻¹)

Max mode (4): 0 - 4,000
Hard mode (3): 0 - 3,400
Medium mode (2): 0 - 2,600
Soft mode (1): 0 - 1,800

Constant speed control reduces the torque drop when remaining battery capacity gets low.

Twin LED job light



Variable speed control by trigger

XPT





Optimum power supply system and Optimum charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.


Optimum charging system

Auto maintenance system with two cooling fans for providing more optimum fast charging



Built Tough

High durability specifications specially designed for 40Vmax Li-Ion batteries

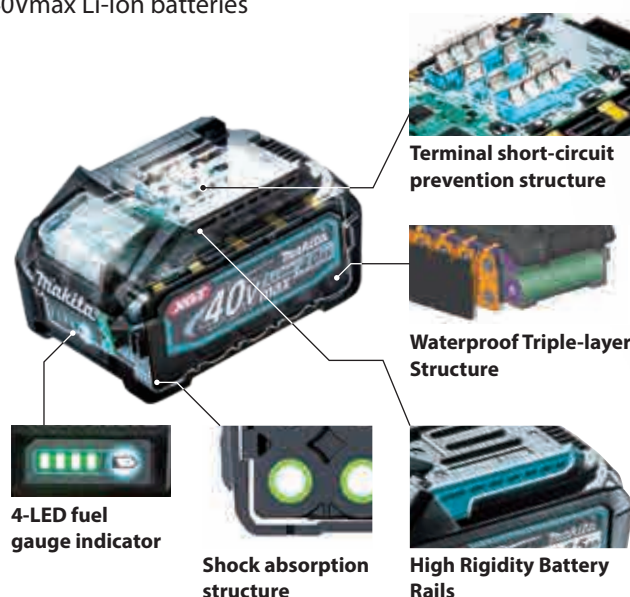

40Vmax Li-ion Battery

BL4025
2.5Ah



BL4040
4.0Ah




40Vmax Fast Charger

DC40RA



The enlarged and raised LED light provides clearer indication of charging status.

Interchangeable Adapter ADP10



Accessories

Tool hanger set
Part No. 191F58-7



Charging Time Reference

Fast Charging	
DC40RA	
BL4025 2.5Ah	28min
BL4040 4.0Ah	45min

Cordless Impact Wrench

TW004G / TW005G 1/2" (12.7 mm)

Variable Speed	Fastening Capacities	Standard Bolt: M10 - M20 (3/8" - 3/4") High Strength Bolt: M10 - M16 (3/8" - 5/8")
Brake	Square Drive	12.7 mm (1/2")
Reversing	No Load Speed (RPM)	Max / Hard / Mid / Soft: 0 - 3,200 / 2,600 / 1,800 / 1,000
Electronic 4-Speed	Impacts Per Minute (IPM)	Max / Hard / Mid / Soft: 0 - 4,000 / 3,400 / 2,600 / 1,800
Constant Speed	Max Fastening Torque	350 N·m (260 ft.lbs.)
Built-in Job Light	Nut-Busting Torque	630 N·m (465 ft.lbs.)
Carrying Case	Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 16.5 m/s ²
	Sound Pressure Level	99 dB(A)
	Sound Power Level	110 dB(A)
	Dimensions (L x W x H)	w/ BL4025: 144x86x248 mm (5-5/8"x3-3/8"x9-3/4") w/ BL4040: 144x86x253 mm (5-5/8"x3-3/8"x10")
	Net weight	1.9 - 2.2 kg (4.2 - 4.9 lbs.)

Standard Equipment: Belt Clip, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202009