

Most suitable for a working in confined and deep space with straight and slim design. The item is matt finished with thin ratchet head.

With safety rope attaching hold (only RM-14 and larger).

Good Design award winning item

Standard straight type



RM700

Ratchet ring wrenches from Next Generation series is set in a new style metal case.

Good Design award winning item




RM110

Good Design award

RM-08



RM-17

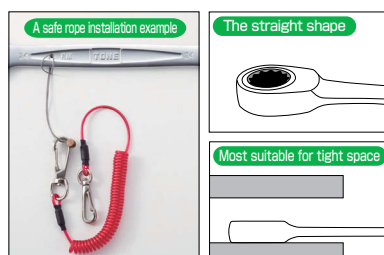

## TOOL CASE (METAL)

Models **MCT1, MCT2, MCT3**

Turn to P113 for more information.



MCT1

MCT2

MCT3

## RATCHET RING WRENCH SET, STANDARD

Models **RM700**

Contents **7 Items**

| Models RM-      | 08 | 10 | 12 | 13 | 14 | 17 | 19 |
|-----------------|----|----|----|----|----|----|----|
| Across Flat(mm) | 8  | 10 | 12 | 13 | 14 | 17 | 19 |

- Tool bag (BNRM7L)
- Weight : 0.96kg
- Qty./Carton : 1

※ A tool bag is available for separate purchase. Please see P115.

Easy to store and carry!!



Models **RM110**

Contents **11 Items**


| Models RM-      | 08 | 10 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 21 |
|-----------------|----|----|----|----|----|----|----|----|----|----|----|
| Across Flat(mm) | 8  | 10 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 21 |

- Tool case : MCT2
- Package size : w406 x d120 x h60mm
- Weight : 2.7kg
- Qty./Carton : 1

## RATCHET RING WRENCH, STANDARD

| Models | Across Flat (mm) | Dimensions (mm) |                |                |                |     | Qty./Carton |                | Weight (g) |
|--------|------------------|-----------------|----------------|----------------|----------------|-----|-------------|----------------|------------|
|        |                  | D <sub>1</sub>  | D <sub>2</sub> | T <sub>1</sub> | T <sub>2</sub> | L   | (Generally) | (Store Center) |            |
| RM-07  | 7                | 16.2            | 16.4           | 4.1            | 6.5            | 140 | 10          | 10             | 29         |
| RM-08  | 8                | 16.2            | 16.4           | 4.1            | 6.5            | 140 | 10          | 10             | 30         |
| RM-10  | 10               | 20.5            | 20.0           | 4.8            | 7.3            | 158 | 10          | 10             | 50         |
| RM-11  | 11               | 22.6            | 21.4           | 5.1            | 7.7            | 165 | 10          | 10             | 57         |
| RM-12  | 12               | 24.6            | 22.6           | 5.3            | 8.2            | 171 | 10          | 10             | 70         |
| RM-13  | 13               | 26.4            | 24.5           | 5.9            | 8.6            | 178 | 10          | 10             | 90         |
| RM-14  | 14               | 28.8            | 27.0           | 6.3            | 9.0            | 190 | 10          | 10             | 100        |
| RM-15  | 15               | 30.8            | 28.2           | 6.6            | 9.4            | 199 | 10          | 10             | 110        |
| RM-16  | 16               | 33.2            | 30.3           | 6.9            | 9.9            | 208 | 10          | 10             | 140        |
| RM-17  | 17               | 35.1            | 31.6           | 7.3            | 10.3           | 225 | 10          | 10             | 175        |
| RM-18  | 18               | 37.2            | 32.3           | 7.8            | 10.7           | 236 | 10          | 10             | 185        |
| RM-19  | 19               | 39.3            | 33.7           | 8.3            | 11.2           | 247 | 10          | 10             | 225        |
| RM-21  | 21               | 46.2            | 40.1           | 8.8            | 13.0           | 288 | 10          | 10             | 365        |
| RM-22  | 22               | 46.2            | 40.1           | 8.8            | 13.0           | 288 | 10          | 10             | 330        |
| RM-24  | 24               | 51.5            | 46.5           | 9.8            | 14.5           | 321 | 10          | 10             | 475        |

- With safety rope attaching hole (only RM-14 and larger)

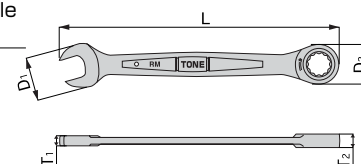

- Use wrench suitably fitted with bolt / nut.
- Do not use with extension pipe etc.
- Avoid giving shock by hitting with hammer etc.