

6
4



HW-3820


Example



WHEEL NUT WRENCH (6pt.)

Models	Across Flat (mm)	Contents		Dimensions (mm)					Qty./ Carton (Generally)	Weight (kg)
		Riyokuchi foil nut socket	Bar	D ₁	D ₂	L	H	D		
HW-2326	23×26	HW2326B	19X450H	38	34	250	450	19	1	1.8
HW-3217	32×17	HW3217B	25X600H	46	37	330	600	25	1	3.7
HW-3517	35×17	HW3517B	25X600H	50	37	330	600	25	1	4.1
HW-3820	38×20	HW3820B	25X600H	54	41.5	330	600	25	1	4.1
HW-4121	41×21	HW4121B	25X600H	59.5	40	445	600	25	1	4.8

※ For Automotive Tools Applicable Model List, turn to P494.



CAUTION

- Do not abuse wrench, for instance, kick or lean on wrench.

6



LWR-21

Example




TIRE WRENCH WITH LEVER (6pt.)

Models	Across Flat (mm)	Dimensions (mm)			Qty./ Carton		Weight (g)
		D	L	H	(Generally)	(Store Center)	
LWR-19	19	27.5	80	275	1	1	450
LWR-21	21	30.0	80	276	1	1	470

※ For Automotive Tools Applicable Model List, turn to P494.

- Hexagon socket




CAUTION

- Do not abuse wrench, for instance, kick or lean on wrench.

The steel ball and ring spring in the socket hold the bolts and nuts.

6

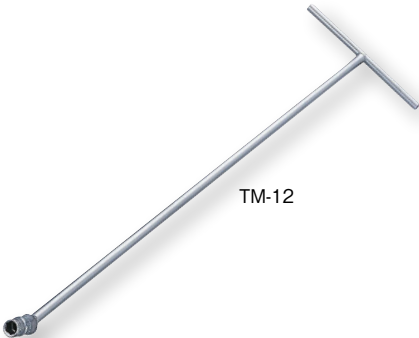


TM-12

T-TYPE TRANSMISSION WRENCH (6pt. NUT HOLDING TYPE)

Models	Across Flat (mm)	Dimensions (mm)				Qty./ Carton		Weight (g)
		D ₁	D ₂	L	H	(Generally)	(Store Center)	
TM-10	10	15	20	650	180	1	1	700
TM-12	12	17	20	650	180	1	1	700
TM-14	14	21	20	650	180	1	1	730
TM-17	17	24	24	650	190	1	1	1,000

- Hexagon socket



CAUTION

- Do not use with extension pipe etc.
- Do not give impact on T-type transmission Wrench.