


Special tool for peeling off/pulling out hoses of automobiles and motorcycle radiator. Three types of shapes are aligned, ideal to cope with various situations. The oval grip shape designed for comfortable put power.



HOSE PLUCKER

Models	The axis diameter (mm)	Dimensions (mm)		Qty./Carton		Weight (g)
		A	L	(Generally)	(Store Center)	
HPL-001	6	110	210	6	6	90
HPL-002	6	100	200	6	6	95
HPL-003	6	90	190	6	6	95

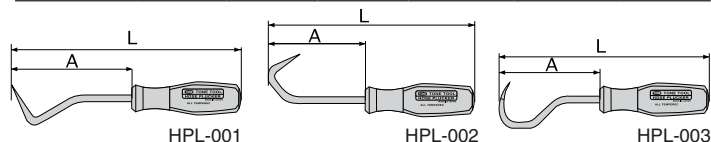


Specialized tool for attaching and removing tires for motorcycles and bicycles.



RIM TOOL

Models	The axis diameter (mm)	Dimensions (mm)		Qty./Carton		Weight (g)
		A	L	(Generally)	(Store Center)	
TRL-300	10	175	300	6	6	170

※ Product for bicycle tire levers is available for separate purchase. Please see P.421.




The tool designed for attaching and detaching the spring, which is used for drum brakes and motorcycle mufflers.




TENSION SPRING REMOVER

Models	The axis diameter (mm)	Dimensions (mm)		Qty./Carton		Weight (g)
		A	L	(Generally)	(Store Center)	
TSH-165	6	110	164	6	6	90



Specialized tool for attaching and detaching air valves for tires such as automobiles and motorcycles.

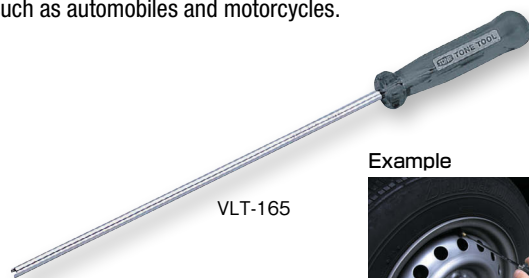

TIRE CORE VALVE REMOVER

Models	The axis diameter (mm)	Dimensions (mm)			Qty./Carton		Weight (g)
		D	A	L	(Generally)	(Store Center)	
VLT-165	4	17	165	235	6	6	35

