

TORQUE WRENCH, PRESET TYPE (FOR BOTH OF R&L HAND THREADS)

Calibration Certificate Included

Test Report | Traceability Chart

Preset type torque wrench.

When preset torque has been reached, a click sound will occur with slight force from the wrench.

Left screw tightening is possible by inverting the torque wrench.

STAINLESS TOOL

TITANIUM TOOL

TOOL SET

TOOL CASE

SOCKET WRENCH

HEXAGON WRENCH

T-TYPE WRENCH

SPANNER OFFSET WRENCH

SCREWDRIVER

BIT

ADJUSTABLE WRENCH PLIERS

SPECIALIZED CAR EQUIPMENT

CYCLE TOOL

LED LIGHT

OTHER HAND TOOLS

TORQUE WRENCH

AIR TOOL



Example



Models	Torque Range (N·m)	Incre-ments	Units	Handle type	Sq.dr A (mm)	Dimensions (mm)				Hand force at Max. torque (N)	Suitable bolt		Qty./ Carton	Weight (kg)	Case Dimensions
						B	H	T	L		Ordinary	High strength			
T6L420NR	60 ~ 420	2	N·m	I	19.0	54	69.2	21.0	965	486	M16 ~ M27	M12 ~ M16	1	3.4	1050 × 105 × 80
T6L700NR	100 ~ 700	5	N·m	II	19.0	68	69.5	27.5	1,314	708	M18 ~ M33	M12 ~ M20	1	6.3	1200 × 180 × 98
T6L850NR	100 ~ 850	5	N·m	II	19.0	76	75.0	29.0	1,388	680	M18 ~ M36	M12 ~ M20	1	8.6	1200 × 180 × 98
T8L850NR	100 ~ 850	5	N·m	II	25.4	76	85.0	29.0	1,538	680	M18 ~ M36	M12 ~ M20	1	8.9	1200 × 180 × 98


• N · m specification

Accessory



• Torque Accuracy ± 3%

Calibration Certificate W/H Traceability 1
Instruction Manual 1
Metal Case 1

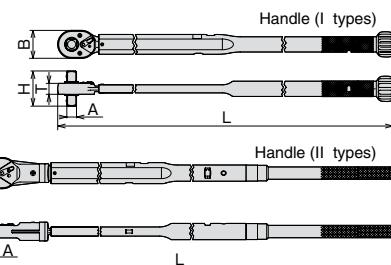

Expire Date of Calibration Certificate

1. When not in use, the product can stay up to 3 years after calibration date mentioned in the certificate.

2. If the usage started after 3 years from calibration date, it can be used up to 1 year since the first usage or up to 10,000 tightening times.

Repair · Maintenance

- Inaccuracy may occur if not used for a long time or inappropriate use of tool. Please contact your distributor regularly for accuracy check.
- Please contact your distributor in case of experiencing tool malfunction (no clicking sound, slight force, etc.)

- Torque devices require regular inspection (once a year or 10,000 times afterwards). Checking service is available with service charge.
- For more information about tool handling, please contact your distributor.
- Accuracy range after repair will be ± 4%.