Tactile Switch Key Top
B32

Key Top Designed Specially for Projected-plunger-type B3F, B3FS and B3W Switches

- Available in a wide range of colors and sizes.
- RoHS Compliant.

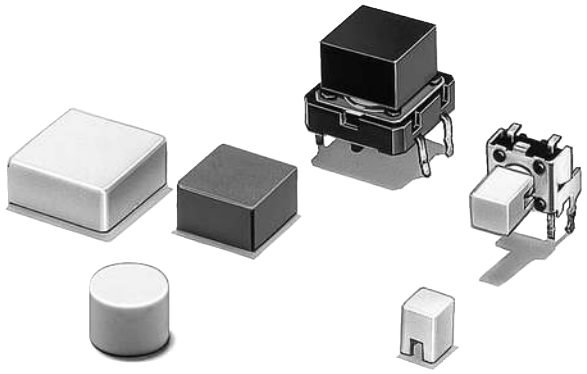

Ordering Information

For B3F, B3FS and B3W Switches

Color	6 x 6 mm Switches (B3F-1000, B3F-3000, B3F-6000, B3W-1000, B3FS-1000)			12 x 12 mm Switches (B3F-4000, B3F-5000, B3W-4000, B3FS-4000)		
	4 x 4 mm Key Top	6 mm dia. Key Top	D-type Key Top	9 x 9 mm Key Top	12 x 12 mm Key Top	9.5-mm dia. Key Top
Ivory	**B32-1000**	**B32-2000**	**B32-2100**	**B32-1200**	**B32-1300**	**B32-1600**
Black	**B32-1010**	**B32-2010**	**B32-2110**	**B32-1210**	**B32-1310**	**B32-1610**
Orange	**B32-1020**	—	—	**B32-1220**	**B32-1320**	**B32-1620**
Yellow	**B32-1030**	—	—	**B32-1230**	**B32-1330**	**B32-1630**
Blue	**B32-1040**	—	—	**B32-1240**	**B32-1340**	—
White	**B32-1060**	—	—	**B32-1260**	**B32-1360**	—
Red	**B32-1080**	—	—	**B32-1280**	**B32-1380**	—

Specifications

■ Characteristics

Ambient operating temperature	–25°C to 70°C (at 60% RH max.) with no icing or condensation
Ambient operating humidity	35% to 85% (at 5 to 35°C)

Dimensions

Note: Unless otherwise specified, all units are in millimeters and a tolerance of ± 0.4 mm applies to all dimensions.

■ For 6 x 6 mm Tactile Switch

B32-10□0





Reference Dimensions

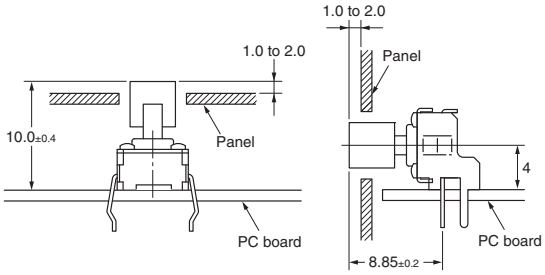

Panel Cutout



B32-2000
B32-2010





Reference Dimensions

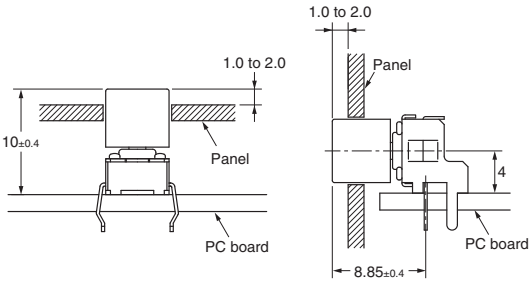

Panel Cutout



B32-2100
B32-2110





Reference Dimensions

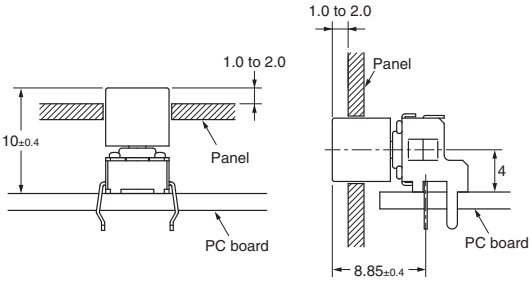

Panel Cutout



■ For 12 x 12 mm Tactile Switch

B32-12□0



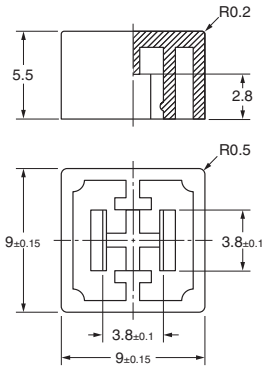

Reference Dimensions



Panel Cutout



B32-13□0



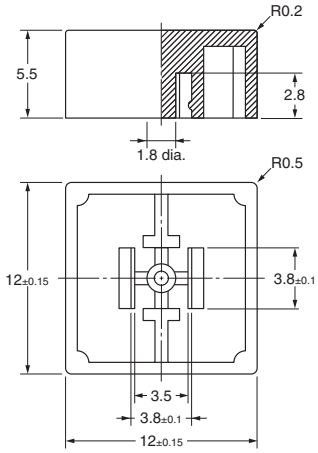

Reference Dimensions

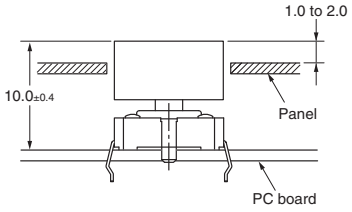

Panel Cutout



B32-16□0



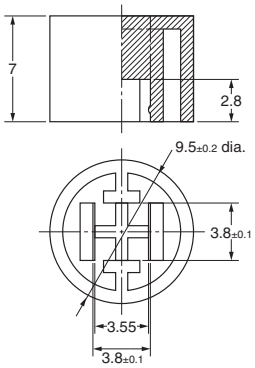

Reference Dimensions

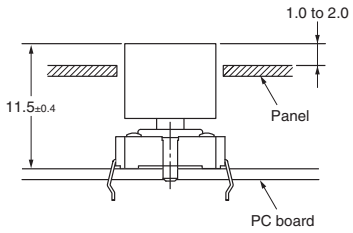

Panel Cutout



Precautions

Mount the Key Top on to the Switch after soldering, otherwise the Key Top may be deformed by the soldering heat.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON

OMRON ELECTRONIC COMPONENTS LLC
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173
847-882-2288

OMRON ON-LINE
Global - http://www.omron.com
USA - http://www.components.omron.com

Cat. No. X303-E-1b 09/13 Specifications subject to change without notice Printed in USA