

A01 series


Keylock switches


Panel cut-out Ø 16 (.630)

A keylock switch assembly requires :
operator + switch block.
To order these elements, select desired model numbers from tables below.
Example : IP65 rectangular keyswitch, clockwise rotation, single pole, 2 positions, maintained = A018125 and A0151BUL.



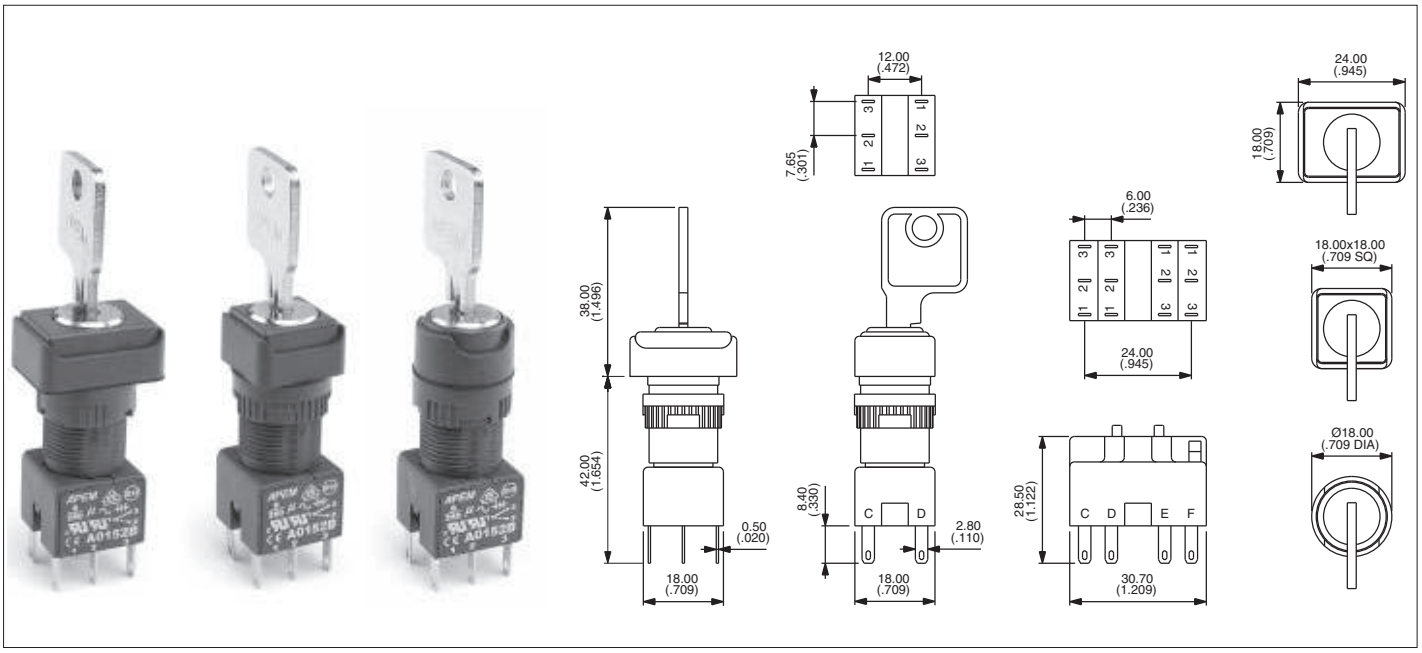

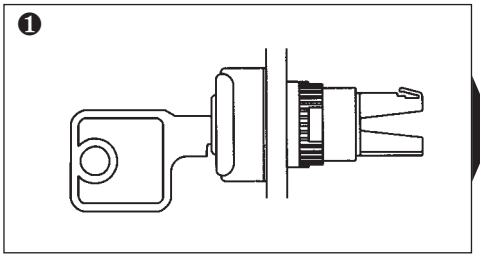




Operator

Pole	Bezel	Description	Part No	Key removable
1 or 2	▭	2 pos. maintained	**A018123**	A
1 or 2	▭	2 pos. maintained	**A018125•**	A-B
1 or 2	▭	2 pos. momentary	**A018124•**	A
3 or 4	▭	2 pos. maintained	**A018127•**	A-B
3 or 4	▭	2 pos. momentary	**A018128•**	A
1 or 2	▭	3 pos. maintained	**A018105**	A-B-C
1 or 2	▭	3 pos. momentary	**A018106**	A
1 or 2	▭	3 pos. mainL, momR	**A018107**	A-B
1 or 2	▭	3 pos. momL, mainR	**A018108**	A-C
1 or 2	□	2 pos. maintained	**A018223**	A
1 or 2	□	2 pos. maintained	**A018225•**	A-B
1 or 2	□	2 pos. momentary	**A018224•**	A
3 or 4	□	2 pos. maintained	**A018227•**	A-B
3 or 4	□	2 pos. momentary	**A018228•**	A
1 or 2	□	3 pos. maintained	**A018205**	A-B-C
1 or 2	□	3 pos. momentary	**A018206**	A
1 or 2	□	3 pos. mainL, momR	**A018207**	A-B
1 or 2	□	3 pos. momL, mainR	**A018208**	A-C
1 or 2	○	2 pos. maintained	**A018323**	A
1 or 2	○	2 pos. maintained	**A018325•**	A-B
1 or 2	○	2 pos. momentary	**A018324•**	A
3 or 4	○	2 pos. maintained	**A018327•**	A-B
3 or 4	○	2 pos. momentary	**A018328•**	A
1 or 2	○	3 pos. maintained	**A018305**	A-B-C
1 or 2	○	3 pos. momentary	**A018306**	A
1 or 2	○	3 pos. mainL, momR	**A018307**	A-B
1 or 2	○	3 pos. momL, mainR	**A018308**	A-C

Switch block

No of poles	Part No
Single pole	**A0151BUL**
Double pole	**A0152BUL**
Three pole	**A0155BUL**
Four pole	**A0153BUL**

Key Positions

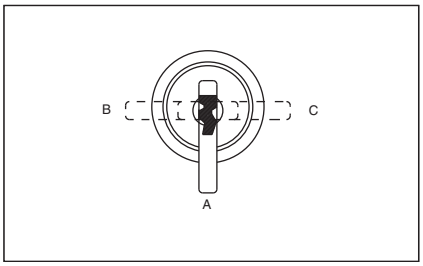

• Key Rotation - 2 position switches

The model numbers shown are for switches with clockwise key rotation.
For anticlockwise rotation, replace :

25	with	**01**
24	with	**02**
27	with	**03**
28	with	**04**

at the end of the model number.

2 standard keys are supplied.
20 key barrel types available from stock.

NON-REMOVABLE KEY POSITIONS / ON-ON-ON FUNCTION : contact APEM.

Bezel: ▭ rectangular, □ square, ○ round, 'pos' - position, 'mainL' - maintained left, 'momR' - momentary right, etc

G