stay connected

MIRO 6.2 PLUGGABLE COMPL.MODULE OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact
24 V AC/DC
Spring clamp terminals

Link to Product

Illustration



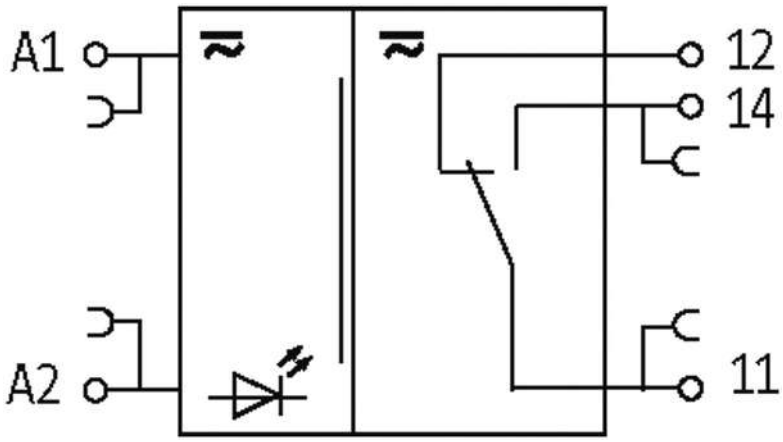

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

MURR ELEKTRONIK
stay connected

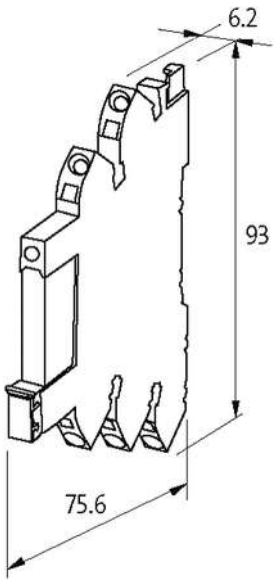

Product may differ from Image

Approvals

Input

Connection voltage - current	24 V AC/DC (19.2...28.8 V AC/DC) - 12 mA
LED display	LED (green)

Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110 V AC); 1.5 A (230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

General data

Test isolation voltage	250 V
Mech./ elect. life	10,000,000 switching cycles (NO) 30,000; (NC) 10,000, load dependent
Protection	IP20
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H × W × D	93×6.2×75.6 mm
Temperature range	-25...+60 °C

Output

Switching voltage	max. 250 V AC/30 V DC
Switching current per output	max. 6 A
Min. load current	100 mA
Power rating (voltage dependent)	max. 1500 VA/180 W
Switching frequency	max. 10 Hz

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Contact material	Ag Sn O2
Energize/release/contact bounce time	8/4/- ms

Commercial data

country of origin	CN
customs tariff number	85364900
EAN	4048879021432
eClass	27371001
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk