COCKS & UNIONS

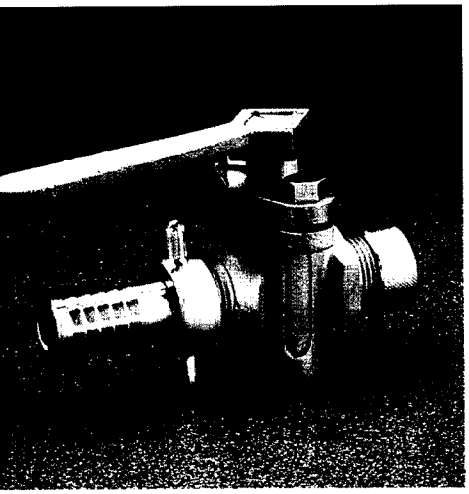

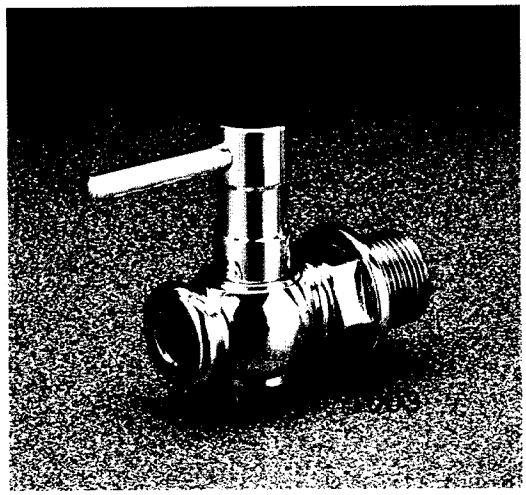

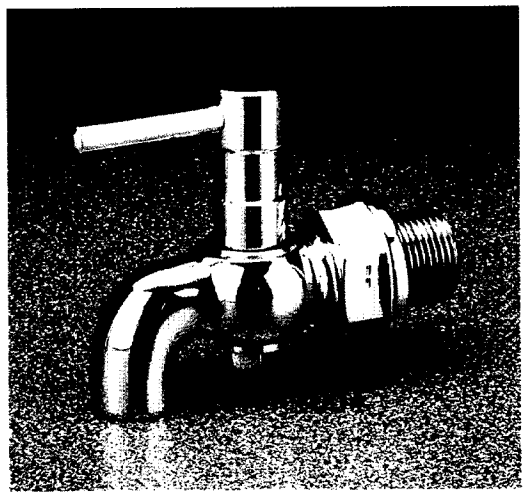

1832 GUNMETAL GLAND COCKS WITH HOSE UNION

Pressure/Temperature Rating (Max Working)
10 bar at 120°C
Test Pressures (Hydraulic)
20 bar
Specification
Male parallel thread (BS 2779) x Hose Union.
Fitted with iron lever.

Size Range

	1/2	3/4	1
1832	O	O	O

Suitable for

Steam	Water	Oil	Air	Gases
	O	O		

Dimensions

Nominal Size		1/2	3/4	1
Hexagon Face to Pipe End	mm	80	101	125
Square Head	mm	10.3	13.5	15.9
Weight Approx.	kg	0.36	0.65	1.12

1003 TEST/GAUGE COCKS

Used on pressure vessels, boilers, oil and water lines for connecting ancillary controls and taking samples.

Specification
Working pressure 7 bar at 100°C.
Hydraulically tested to 14 bar.
Gunmetal body. Round barrel.
Lever handle (in line with body when open).
Cannon nose.

Size Range

	1/8	1/4	3/8	1/2	3/4
1003	O	O	O	O	O

Suitable for

Steam	Water	Oil	Air	Gases
	O	O		

Dimensions

Nominal Size		1/8	1/4	3/8	1/2	3/4
Bore Diameter	mm	4.0	5.0	6.0	8.0	13 x 10
Weight Approx.	kg	0.10	0.12	0.17	0.22	0.42

1004 TEST/GAUGE COCKS

Used on pressure vessels, boilers, oil and water lines for connecting ancillary controls and taking samples.

Specification
Working pressure 7 bar at 100°C.
Hydraulically tested to 14 bar.
Gunmetal round barrel.
Lever handle (in line with body when open).
Bent nose.

Size Range

	1/8	1/4	3/8	1/2	3/4
1004	O	O	O	O	O

Suitable for

Steam	Water	Oil	Air	Gases
	O	O		

Dimensions

Nominal Size		1/8	1/4	3/8	1/2	3/4
Bore Diameter	mm	4.0	5.0	6.0	8.0	13 x 10
Weight Approx.	kg	0.11	0.14	0.18	0.25	0.45