RJ45 END VIEW




12345678

1 = WHITE/ORANGE (+TX)
2 = ORANGE (−TX)
3 = WHITE/GREEN (+RX)
4 = BLUE
5 = WHITE/BLUE
6 = GREEN (−RX)
7 = WHITE/BROWN
8 = BROWN

Ethernet


FEMALE END VIEW



1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (−TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (−RX)


euro fast. Ethernet


MOUNTING HOLE



SPECIFICATIONS

CONTACT CARRIER MATERIAL (FKFD)	TPU/BLACK
MOLDED HEAD MATERIAL/COLOR (FKFD)	TPU/BLACK
CONTACT MATERIAL/PLATING (FKFD)	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING (FKFD)	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR (RJ45)	POLYCARBONATE/CLEAR
MOLDED HEAD MATERIAL/COLOR (RJ45)	TPU/BLACK
CONTACT MATERIAL/PLATING (RJ45)	BRONZE/GOLD
RATED CURRENT [A]	1.5 A
RATED VOLTAGE [V]	42 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	8x24 AWG, STRANDED, CAT 5e
TEMPERATURE RANGE	−40°C to +75°C (−40°F to +167°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68 (RJ45:IP20)

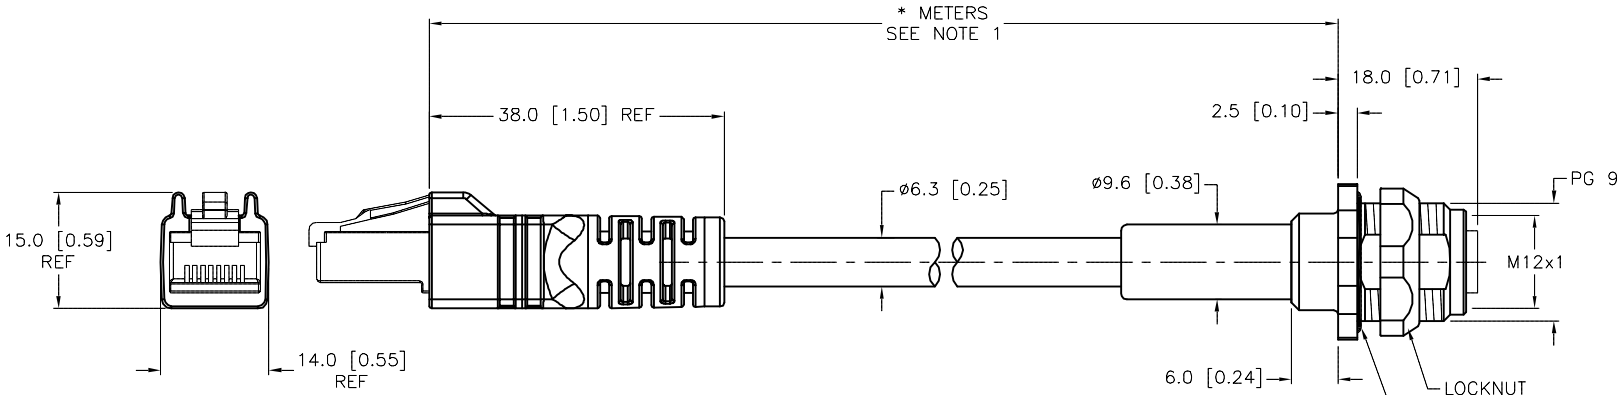



END VIEW
LOCKNUT NOT SHOWN

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH − 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	**TOLERANCE ***
0−7mm	±0.5mm
8−29mm	±1.0mm
30−49mm	±2.0mm
50−69mm	±3.0mm
70−100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING − FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

REV	DESCRIPTION	BY	DATE	ECO NO.
0	UPDATE RECEPTACLE	RDS	05/04/15	49613

RELATED DOCUMENTS
1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK INC
High Technology Sensors and Automation Controls
3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1−800−544−7769
(763) 553−7300
(763) 553−0708 fax
turck.com

DRFT	DF	DATE	5/23/01
APVD	DF	SCALE	1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]
DO NOT SCALE THIS DRAWING

DESCRIPTION
RJ45 FKFD 840−*M

IDENTIFICATION NO.

REV
0

FILE: 777005852

SHEET 1 OF 1

Approved 05/11/2015, work order #77318 by J.S.