

Torque grip feature


Ideal tools for replacing machine tool tips!
Torque management becomes easier by the vibration transmitted to hands!
7 different preset torque values available!



[How to use torque grip]

- (1) Select a torque grip exactly fits the tightening torque, and then set the bit that fits the screw.
- (2) Set the torque grip vertically and tighten the screw slowly.
- (3) When reaching the set torque, the grip will give a vibration.

※ After feeling a vibration, please don't apply torque any more.

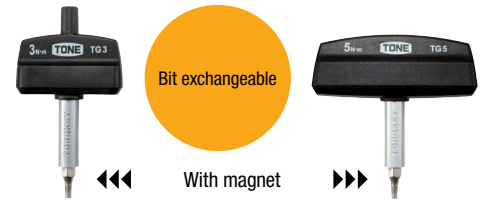

Reference : Tip attachment recommended for machine tools (Standard Value).

Size	N · m	Size	N · m
T6	0.5 ~ 0.6	6IP	0.6
T7	0.9	7IP	0.9
T8	1 ~ 1.3	8IP	1.2
T9	2.3	9IP	1.4
T10	2 ~ 2.5	10IP	2
T15	3.2 ~ 3.5	15IP	3
T20	5	20IP	5

※ For standard torque value, depends on the manufacturer and type, so please check it.

TORQUE GRIP SET

Models **TGS20**

Contents **28 Items** (Bit : 20 / Handle : 8)

Descriptions	Models/Specifications	Page
TORX GRIP	TG- 0.6(0.6N·m), 0.9(0.9N·m), 1.2(1.2N·m), 1.4(1.4N·m), 2(2N·m), 3(3N·m), 5(5N·m)	P.355
BIT HOLDER	RDBH- 065(65mm)	P.360
T-TYPE TORX BIT SET	BTTH10S T-type Torx bit set (Tamer-proof) Bit holder BTB10 (For 10)	P.361
TORX PLUS BIT SET	BTIP10S Torx plus bit Torx plus bit Bit holder BTB10 (For 10)	P.362
PLASTIC CASE		—

- Torque Accuracy (TG0.6-1.4 : 15 % ± and TG2-5 : 10 % ±)
- Package size : w275xd155xh55mm
- Weight : 820g
- Qty./Carton : 6

Accessory

Instruction manual 1



• For right rotation only, click with the preset torque.




A/F of bit
6.35 mm



TGS20

Plastic case Dimensions



TORQUE GRIP

Models	Capacity (N·m)	Torque Accuracy (%)	Across flat s (mm)	Handle type	Dimensions(mm)								Qty./ Carton	Weight (g)
					W ₁	W ₂	H	φ d	L ₁	L ₂	L			
TG0.6	0.6	± 15	6.35	I	52	23	14	10	32	9	77.5	6	48	
TG0.9	0.9	± 15	6.35	I	52	23	14	10	32	9	77.5	6	48	
TG1.2	1.2	± 15	6.35	I	52	23	14	10	32	9	77.5	6	48	
TG1.4	1.4	± 15	6.35	I	52	23	14	10	32	9	77.5	6	48	
TG2	2	± 10	6.35	I	52	23	14	10	32	9	77.5	6	48	
TG3	3	± 10	6.35	I	52	23	14	10	32	9	77.5	6	48	
TG5	5	± 10	6.35	II	81	25	16	10	32	9	64.5	6	65	

※ Bits are not included, please purchase separately. (Turn to P361-364 for more details).

※ The numerical value of the unit shown to a grip [Kgcm] [Inlb] [Ftoz] is reduced value of Nm.

※ TORX, TORX PLUS, Torx and a Torx plus are USA Acument Intellectual Properties LLC. A registered trademark of company.

- N·m The specification

Accessory

Instruction manual 1



• For right rotation only, click with the preset torque.




A/F of bit
6.35 mm



TG3

TG5

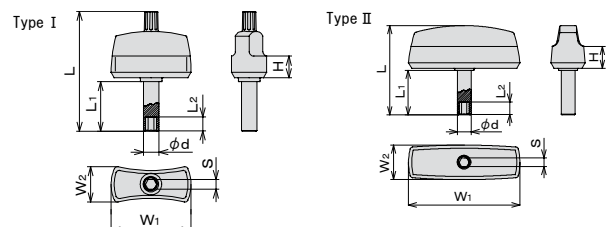

For hand tool



With magnet



TORX (T type/Tamper-resistant)



Exchange type



TORX PLUS

CAUTION

• Use torque wrenches if precise tightening torque management is required.

TONE