Control & Signalling



- ø22mm Pushbuttons, Selector / Key Switches, Pilot Lights & Control Stations
- Complete Range of E-Stop Mushroom Heads
- Fast Easy Single Hand Mount
- Snap-On Contact Blocks

CONTENTS

Control & Signalling

Non Illuminated Pushbutton Heads	4
Illuminated Pushbutton Heads	5
Mushroom Heads	6
EN418 Mushroom Heads & Accessories	7
Non Illuminated Selector / Key Switch Heads	8
Illuminated Selector Switch Heads	9
Twin / Triple Touch Heads & Accessories	10
Contact Blocks, Lampholders & Transformer Blocks	11
Pilot Lights	12
Lamps, Neons & LED's	13
Legend Plates	14
Technical Specification & Assembly Diagrams	15
Control Stations Auxibox Range Equipped	16
Control Stations Auxibox Range Un-equipped	18
Control Stations Modulbox Range Un-equipped	19

NON ILLUMINATED PUSHBUTTON HEADS IP65

Spring Return	Dimensions	Red	Green	Black	Yellow	White	Blue
Flush without Engraving 		C21AA01	C21AA02	C21AA03	C21AA04	C21AA05	C21AA06
Flush with Engraving 		C21AA81  C21AA31 *	C21AA82  C21AA32 *	C21AA83  C21AA33 *	- C21AA34 *	- C21AA35 *	- C21AA36 *
Super Flush without Engraving 	 (mounts in a 30mm hole)	F24AA01	F24AA02	F24AA03	F24AA04	F24AA05	F24AA06
Super Flush with Engraving 	 (mounts in a 30mm hole)	F24AA81  F24AA31 *	F24AA82  F24AA32 *	F24AA83  F24AA33 *	- F24AA34 *	- F24AA35 *	- F24AA36 *
Projecting 		C21AB01	C21AB02	C21AB03	C21AB04	C21AB05	C21AB06
Mushroom Dia 29mm 		C21AC01	C21AC02	C21AC03	C21AC04	-	-
Mushroom Dia 40mm 		C21AD01	C21AD02	C21AD03	C21AD04	-	-
Mushroom Dia 70mm 		C21AE01	-	C21AE03	-	-	-
Latching (Push Push)	**Dimensions**	**Red**	**Green**	**Black**	**Yellow**	**White**	**Blue**
Flush 		C21CA01	C21CA02	C21CA03	C21CA04	C21CA05	C21CA06
Projecting 		C21CB01	C21CB02	C21CB03	C21CB04	C21CB05	C21CB06

* Please add code for text or symbol required to the end of the part number from the tables on page 14
Example C21AA36-315 = Flush Blue Pushbutton Engraved “Reset”

ILLUMINATED PUSHBUTTON HEADS IP65

Spring Return	Dimensions	Red	Green	Transp.	Yellow	White	Blue
Flush without Engraving 		C21AH10	C21AH20	C21AH30	C21AH40	C21AH50	C21AH60
Flush with Engraving 		C21AJ10 *	C21AJ20 *	C21AJ30 *	C21AJ40 *	C21AJ50 *	C21AJ60 *
Super Flush without Engraving 	 (mounts in a 30mm hole)	F24AH10	F24AH20	F24AH30	F24AH40	F24AH50	F24AH60
Super Flush with Engraving 	 (mounts in a 30mm hole)	F24AJ10 *	F24AJ20 *	F24AJ30 *	F24AJ40 *	F24AJ50 *	F24AJ60 *
Projecting 		C21AK10	C21AK20	C21AK30	C21AK40	C21AK50	C21AK60
Latching (Push Push)	**Dimensions**	**Red**	**Green**	**Transp.**	**Yellow**	**White**	**Blue**
Flush 		C21CH10	C21CH20	C21CH30	C21CH40	C21CH50	C21CH60
Projecting 		C21CK10	C21CK20	C21CK30	C21CK40	C21CK50	C21CK60
Silicon Shroud IP67	**Dimensions**	**Red**	**Green**	**Transp.**	**Yellow**	**Black**	**Blue**
		WA0203	WA0204	WA0228	WA0206	WA0205	WA0227



Part numbers beginning C21 have a mat chromed plastic bezel as standard. Other types of bezel are available as shown here. Simply change the start of the part number from C21 to the required type from the table opposite.

C21	Mat chromed plastic bezel
C22	Black plastic bezel
C23	Grey plastic bezel
C24	Brilliant chromed brass bezel
C26	Brilliant chromed plastic bezel
C28	Mat anodised aluminium bezel

* Please add code for text or symbol required to the end of the part number from the tables on page 14
Example C21AJ40-313 = Flush Yellow Pushbutton Engraved “Open”

NON ILLUMINATED MUSHROOM HEADS

Mushroom Heads	Dimensions	Red	Green	Black	Yellow
Dia 29mm, Turn To Reset 		C21EC01	C21EC02	C21EC03	C21EC04
Dia 40mm, Turn To Reset 3 x STOP 		C23ED11	-	-	-
Dia 40mm, Turn To Reset 		C23ED01	C23ED02	C23ED03	C23ED04
Dia 40mm, Pull To Reset 		C28DW01	-	-	-
Dia 40mm, Key To Reset 		C21GM01	-	-	-
Dia 70mm, Key To Reset 		C21GP01	-	-	-

ILLUMINATED MUSHROOM HEADS

Mushroom Heads	Dimensions	Red	Green	Yellow	Opal
Dia 29mm, Turn To Reset 		C21EL10	C21EL20	C21EL40	C21EL50
Dia 40mm, Turn To Reset 		C21EM10	C21EM20	C21EM40	C21EM50
Dia 40mm, Pull To Reset 		C28DM10	C28DM20	C28DM40	C28DM50

Key reset mushroom heads supplied with 2 keys, profile 455 as standard.
Key profile 1424A also available at no extra cost. Other profiles available at extra cost, details upon request.

EN418 MUSHROOM HEADS

A complete range of Mushroom Heads conforming to the requirements of EN418 suitable for use in Emergency Stop applications.

EN418 Mushroom Heads	Dimensions	Red
Dia 40mm, Turn To Reset 		C20ER01
Dia 29mm, Pull To Reset 		C20DQ01
Dia 40mm, Pull To Reset 		C20DR01
Dia 29mm, Key To Reset 		C20GQ01
Dia 40mm, Key To Reset 		C20GR01
Dia 54mm, Pull To Reset, Flag Indicator 		Off - Red Flag “O” White Text On - Green Flag “I” White Text — C20UA21 Off - Red Flag “O” Yellow Text On - Yellow Flag “I” Red Text — C20UA41 Off - Red Flag “STOP” Yellow Text On - Yellow Flag “I” Red Text — C20UA42



Part numbers beginning C21 have a mat chromed plastic bezel as standard. Other types of bezel are available as shown here. Simply change the start of the part number from C21 to the required type from the table opposite.

C21	Mat chromed plastic bezel
C22	Black plastic bezel
C23	Grey plastic bezel
C24	Brilliant chromed brass bezel
C26	Brilliant chromed plastic bezel
C28	Mat anodised aluminium bezel

Key reset mushroom heads supplied with 2 keys, profile 455 as standard.
Key profile 1424A also available at no extra cost. Other profiles available at extra cost, details upon request.

MUSHROOM HEAD ACCESSORIES

Metal Legend Plates



Dia 60mm “EMERGENCY STOP”	WE16-300
Dia 80mm “EMERGENCY STOP”	WE00-300
Dia 60mm Without text	WE16
Dia 80mm Without text	WE00

Extended Bezel



Low version suitable for use with C23ED01 C21GM01 C21EC01 C28DW01	WA0239
High version suitable for use with C20DR01 C20DQ01	WA0240

NON ILLUMINATED SELECTOR / KEY SWITCH HEADS

Position	Small Handle	Lever Handle	Key Operated	Key Operated
Black Handle Mat Chromed Bezel			 Key Free 0	 Key Free 0 - 1
0 1	C21KA03	C21KP03	C21LA00	-
0 1	C21KB03	C21KQ03	-	-
0 1	C21KC03	C21KR03	C21LC00	-
0 1	C21KD03	C21KS03	C21LD00	-
0 1	C21KE03	C21KT03	-	C21LG00
0 1	C21KF03	-	C21LF00	C21LH00
1 0 2	C21MA03	C21MR03	C21NA00	-
1 0 2	C21MB03	C21MS03	-	-
1 0 2	C21MC03	C21MT03	C21NC00	-
1 0 2	C21MD03	C21MU03	C21ND00	-
1 0 2	C21MK03	-	-	C21NK00 Key Free 1-0-2
Dimensions				



All of the selector switch heads on this page are black in colour with a white index. Other colours are available as shown here. Simply change the end of the part number from 03 to the required type from the table opposite.

Code	Colour
01	Red
02	Green
03	Black
08	Grey

WORKING DIAGRAM OF CONTACTS



not actionned



actionned

Position and contact view from front







Key switches supplied with 2 keys, profile 455 as standard. Key profile 1424A also available at no extra cost.
Other profiles available at extra cost, details upon request.

ILLUMINATED SELECTOR SWITCH HEADS

Small Handle



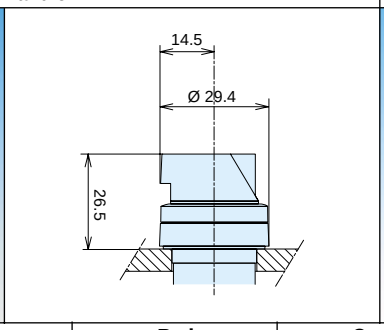

Lever Handle



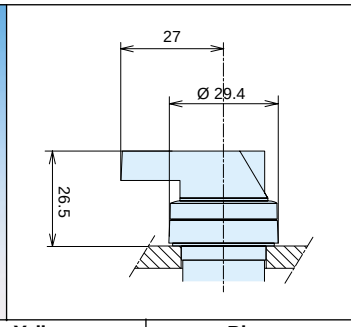

Position	Handle	Red	Green	Black	Yellow	Blue
0 1	Small Lever	C21KG51 -	C21KG52 -	C21KG53 C21KV53	C21KG54 -	C21KG56 -
0 1	Small Lever	C21KJ51 -	C21KJ52 -	C21KJ53 C21KX53	C21KJ54 -	C21KJ56 -
0 1	Small Lever	C21KK51 -	C21KK52 -	C21KK53 C21KY53	C21KK54 -	C21KK56 -
0 1	Small Lever	C21KM51 -	C21KM52 -	C21KM53 -	C21KM54 -	C21KM56 -
1 0 2	Small Lever	C21ME51 -	C21ME52 -	C21ME53 C21ML53	C21ME54 -	C21ME56 -
1 0 2	Small Lever	C21MF51 -	C21MF52 -	C21MF53 C21MM53	C21MF54 -	C21MF56 -
1 0 2	Small Lever	C21MG51 -	C21MG52 -	C21MG53 C21MN53	C21MG54 -	C21MG56 -
1 0 2	Small Lever	C21MH51 -	C21MH52 -	C21MH53 C21MP53	C21MH54 -	C21MH56 -
0 1 2	Small Lever	C21MJ51 -	C21MJ52 -	C21MJ53 -	C21MJ54 -	C21MJ56 -



Part numbers beginning C21 have a mat chromed plastic bezel as standard. Other types of bezel are available as shown here. Simply change the start of the part number from C21 to the required type from the table opposite.

C21	Mat chromed plastic bezel
C22	Black plastic bezel
C23	Grey plastic bezel
C24	Brilliant chromed brass bezel
C26	Brilliant chromed plastic bezel
C28	Mat anodised aluminium bezel

WORKING DIAGRAM OF CONTACTS



not actionned



actionned

Position and contact view from front

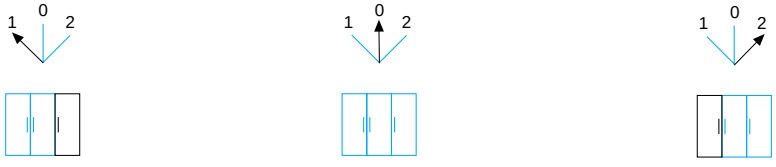

Illuminated switches in Red, Green, Yellow & Blue have coloured transparent handle with translucent white index
Illuminated switches in Black have solid black handle with transparent colourless index

SPRING RETURN TWIN & TRIPLE TOUCH BUTTONS IP40

Without Indicator Light | **With Indicator light**



V62QA02	V62QB02	V62QA11	V62B051	V62QH02	V62QK02

Other versions available please enquire for further details

Silicon Shroud (IP67)



WA0223
For Projecting Twin/Triple Touch



WA0224
For Non Projecting Twin/Triple Touch

PUSHBUTTON ACCESSORIES

Adjustable Push/Reset Button





L=26mm - 63mm
Travel=11mm

Red	C21HA01
Green	C21HA02
Black	C21HA03
Yellow	C21HA04
Blue	C21HA06

Other lengths available upon request

Button For Potentiometer



C21RP03



Suitable for Potentiometer with Dia. 6-6.35mm shaft 46-51mm long

Toggle Switch
2 Position





Stable
Spring Return

C21PA03
C21PB03

Padlockable Cap
For Pushbuttons





WA0226

Blanking Plug
For Dia 22mm Hole



Black WA0229
Grey WA0215

Super Flush Adaptor Kit



WKS024

Square Bezel	Din Rail Adaptor	Extended Bezel	Anti Rotation Ring	Pushbutton Fixing Tool	Lamp Extractor
					
Bezel WA0230 End Piece WA0231	WA0238	WA0225	WA0209	WA0234	WA0201

CONTACT MODULES & LAMPHOLDERS

N/C Contact	N/O Contact	N/C & N/O Contact	Lampholder	Lampholder
1 2	3 4	1 2 3 4	X1 X2	X1 X2
		 For Use With 234E Clip Only	 Direct Supply 400V/2.6W Max	 230V Supply 130V/2.6W Lamp
23E01	23E10	23E11	23EA	23ECJG

CLIPS

Single Clip	3 Module Clip	Clip For 23E11	Side Clip	Second Row Clip
		 For Use With 23E11 Contact Block Only		
230E	233E	234E	235E	236E

COMPLETE CONTACT BLOCKS

Without Lampholder For Non Illuminated Switches

 1 x N/C Single Clip	 1 x N/O Single Clip	 2 x N/C 3 Module Clip	 1 x N/C + 1 x N/O 3 Module Clip	 2 x N/O 3 Module Clip
230E01	230E10	233E02	233E11	233E20

With 23EA Lampholder (Direct Supply 400V/2.6W Max) For Illuminated Switches

 1 x N/C 3 Module Clip	 1 x N/O 3 Module Clip	 2 x N/C 3 Module Clip	 1 x N/C + 1 x N/O 3 Module Clip	 2 x N/O 3 Module Clip
233EA01	233EA10	233EA02	233EA11	233EA20

TRANSFORMER BLOCKS

Type		130V - 6V	240V - 6V	400V - 6V	130V - 12V	240V - 12V	400V - 12V
Transformer Block 	For illuminated pushbutton or selector switch Side / rear mounted on 235E / 236E	23EGA	23EJA	23ELA	23EGB	23EJB	23ELB
Transformer Lamp Holder 	For pilot light lenses C20SAxx / C20SBxx only Supplied complete with 233E clip	233EVGA	233EVJA	233EVLA	233EVGB	233EVJB	233EVLB

Please note all contact modules and complete contact blocks are supplied with open screw terminals as standard. Please enquire for details of faston connector & pcb mount contact blocks as well as gold plate contacts for low level signal switching.

ONE PIECE PILOT LIGHTS



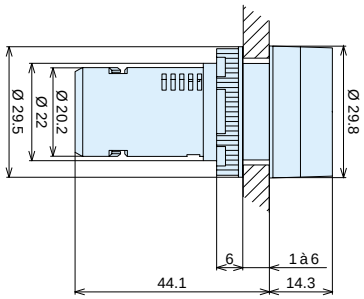

- Simple low cost one piece pilot lights
- Noticeably better brightness through optimal positioning of the lamp
- Fluted lens version recommended for use with filament lamps & neon's
- Smooth lens version recommended for use with LED's
- Resistor & diode version allows a 230V supply with a 130V 2.6W filament lamp

	Red	Green	Transp.	Yellow	White	Blue
Fluted lens - Direct supply Supply up to 400V / 2.6W Max (Filament lamp / neon not included)	S20SA10	S20SA20	S20SA30	S20SA40	S20SA50	S20SA60
Smooth lens - Direct supply Recommended for LED up to 230V (LED not included)	S20SB10	S20SB20	S20SB30	S20SB40	S20SB50	S20SB60
Fluted lens - Built in resistor & diode Supply 230V for filament lamp 130V (Inclusive of 130V 2.6W filament lamp)	S20JA10C	S20JA20C	S20JA30C	S20JA40C	S20JA50C	S20JA60C

Notes:
(1) Direct supply versions recommended to be used with filament lamps up to 130V maximum
(2) For 230V requirments use neon lamps or the built in resistor & diode version
(3) When using LED's use the smooth lens version which also has a diffuser under the coloured lens that greatly improves the luminosity
(4) When using LED's ensure that you match the colour of the LED to the colour of the lens

PILOT LIGHT LENSES

Type	Red	Green	Transp.	Yellow	White	Blue
Ribbed Lens  	C20SA10	C20SA20	C20SA30	C20SA40	C20SA50	C20SA60
Clear Lens  	C20SB10	C20SB20	C20SB30	C20SB40	C20SB50	C20SB60

For WE18 Text/Symbol Insert see page 14.

LAMPHOLDERS & ACCESSORIES

Lampholder & Clip Direct Supply 400V Max	**Lampholder & Clip** 230V Supply 130V Lamp	**Empty Module**	**Diode Module** Single Diode	**Diode Module** Two Diodes
				
230EA	230ECJG	23EX	23ET	23ETT

FILAMENT LAMPS Ba9s DIA 10 X 28 MM



Voltage (V)	Current (mA)	Power (W)	Average life (Hours)	Part Number
6	200	1.2	15,000	WDL006
12	166	2	3,000	WDL012
24	83	2	10,000	WDL024
30	66	2	10,000	WDL030
48	41	2	5,000	WDL048
130	20	2.6	2,000	WDL130

NEON LAMPS Ba9s DIA 10 X 28 MM



Voltage (V)	Current (mA)	Average life (Hours)	Colour	Part Number
115	2.5	25,000	Orange	WDN127
115	1.2	25,000	Green	WDF127
230	2.5	25,000	Orange	WDN220
230	1.2	25,000	Green	WDF220

STAR LED LAMPS Ba9s DIA 10 X 25 MM



Voltage (V)	Current (mA)	Red	Green	Yellow	Blue	White
12 AC/DC	15	LED12R	LED12G	LED12Y	LED12B	LED12W
24 AC/DC	15	LED24R	LED24G	LED24Y	LED24B	LED24W
130 AC	5	LED130R	LED130G	LED130Y	LED130B	LED130W
230 AC	3	LED230R	LED230G	LED230Y	LED230B	LED230W

MEGA STAR LED LAMPS Ba9s DIA 10 X 25 MM



Voltage (V)	Current (mA)	Red	Green	Yellow	Blue	White
24 AC/DC	17	MLED24R	MLED24G	MLED24Y	MLED24B	MLED24W
130 AC	5	MLED130R	MLED130G	MLED130Y	MLED130B	MLED130W
230 AC	3	MLED230R	MLED230G	MLED230Y	MLED230B	MLED230W

All of the LED lamps above have a lifetime in excess of 100,000 hours

CONNECTION DIAGRAMS FOR LAMP TESTING MODULE

With 1 Diode (part number 23ET) For direct supply 6-130V (Lampholder 23EA)

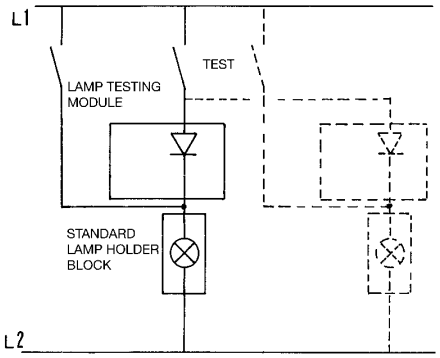

With 2 Diodes (part number 23ETT) For 230V supply 130V lamp (Lampholder 23ECJG)

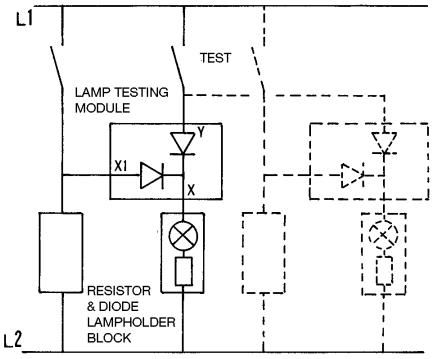

LEGEND PLATES

Frames For Legend Plates

				
30mm x 45mm For Plate Type IA	30mm x 48mm For Plate Type IA	40mm x 45mm For Plate Type IB	30mm x 50mm For Plate Type IE	30mm x 53mm For Plate Type IE
				
WP3	WP4	WG3	WP5	WP6

Legend Plate Inserts

	IA	IB	IE	WE15	WE18
					
	26mm x 10.5mm Frame WP3 / WP4	36mm x 10.5mm Frame WG3	26mm x 16mm Frame WP5 / WP6	Dia 17mm Pushbutton Insert	Dia 22mm Lamp Lens Insert
No Of Rows	1 - 2	1 - 2	1 - 2 - 3	1 - 2	1 - 2
Characters Per Row	13	18	13	8	8
Character Height	3mm	3mm	3mm	3mm	3mm
Red	IA1	IB1	IE1	-	-
Black	IA3	IB3	IE3	-	-
Transparent	IA7	IB7	IE7	WE15	WE18
Aluminium	IA9	IB9	IE9	-	-

Standard Text

Text	Code	Text	Code	Text	Code	Text	Code
Alarm	521	Hand - 0 - Auto	591	Power On	330	Start	301
Auto	513	Hand - Auto	583	Raise	307	Stop	302
Close	314	Jog	328	Reset	315	Tripped	3327
Down	336	Lower	308	Reverse	306	Up	335
Fast	310	Off	304	Run	327	0 - I	081
Forward	305	On	303	Running	3326	0 - I - Start	093
Hand	524	Open	313	Slow	309	I - 0 - II	091

Standard Symbols ISO /DIN

Description	Symbol	Code
Continuous straight line movement ISO1		A01
Alternating straight line movement ISO 5		A05
Continuous rotating movement clockwise ISO 7A/DIN 100		A07
Continuous rotating mov. anti clockwise ISO 7B		B07
Forward ISO 16		A16
Increase in value ISO 28		A28
Decrease in value ISO 29		A29
Adjustable ISO 62		A62
Clamp, block apply pressure ISO 63A		A63
Clamp, block apply pressure ISO 63B		B63

Description	Symbol	Code
Unclamp, release ISO 64A		A64
Unclamp, release ISO 64D		B64
Brake ISO 65		A65
Release brake ISO 66		A66
Automatic cycle (or semi automatic) ISO 67		A67
Manual control ISO 68		A68
<<ON>> Close circuit ISO 69		A69
<<STOP>> Open circuit ISO 70		A70
ON/OFF close + open circuit ISO71		A71
Close circuit manual impulse ISO 72/ DIN 168		A72

Description	Symbol	Code
Clutch ISO 74/ DIN 46		A74
De-clutch ISO 75/ DIN 45		A75
Warning <<Live>> (energised) ISO 92 / DIN 45		A92
Main switch ISO 94		A94
Lubrication jet ISO 101		C01
Machine lighting ISO 102/ DIN 139		C02
Greasing ISO 107/DIN 175		C07
Blow ISO 108/ DIN 264		C08
Suction ISO 109/ DIN 264		C09
(Sound) Alarm DIN 155		D01

Additional Standard Symbols

B01	E01	F01	B62	E62	F62	003	004	005

TECHNICAL SPECIFICATION

Max Thermal Current (Ith) A	16	**Low Level**	5 mA @ 24 VDC
Insulation Voltage (Ui) VAC	690	**Impulse Withstand (Ui) KV**	6

Rated AC Current (Ie) A	**AC21**	**AC15**
230 VAC	14	6
400 VAC	12	4.5
440 VAC	11	3.5
500 VAC	10	2.5
690 VAC	6	1
Rated DC Current (Ie) A	**-**	**DC13**
24 VDC	-	1.5
48 VDC	-	1
60 VDC	-	0.7
110 VDC	-	0.3
230 VDC	-	0.2

Temperature Limits	**Deg C**
Operating	-30 - +60
Storage	-50 - +80
Electrical Life (AC1) A	**x10 6**
2	3
6	1
10	0.5

Mechanical Life	**x10 6**
Spring Reurn Buttons	3
Other Buttons	1
Max Bulb Power	2.6w
Ingress Protection	**IP**
Standard	65
Twin/Triple Touch	40
Silicon Shroud	67

Approvals:

ASSEMBLY EXAMPLES FOR NON-ILLUMINATED PUSH BUTTONS

Pushbutton with 1 contact block on single-module clip

Pushbutton with 2 or 3 contact blocks on 3 module clip

Pushbutton with 4 or 5 contact blocks using one or two side clips

Pushbutton with 4, 5 or 6 contact blocks using a second-row clip

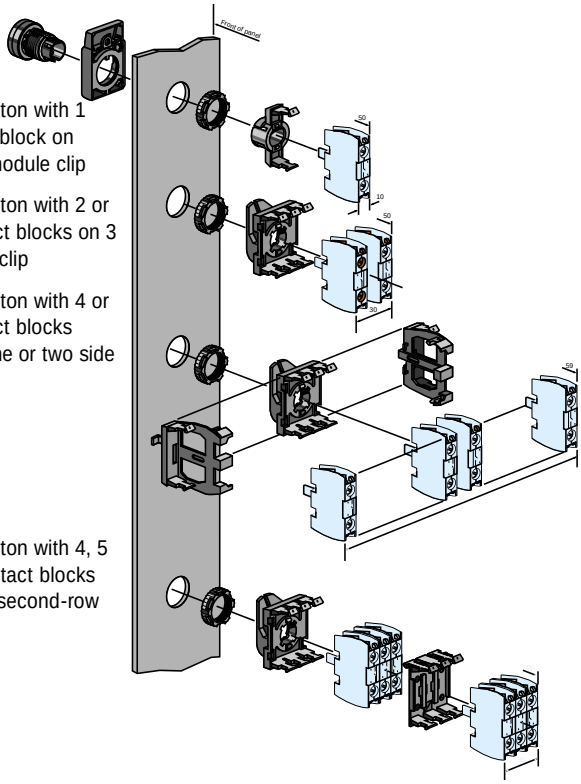

ASSEMBLY EXAMPLES FOR ILLUMINATED PUSH BUTTONS AND PILOT LIGHTS

Pilot light on single module clip

Illuminated pushbutton for direct supply or with resistor and diode with 1 or 2 contact blocks

Illuminated pushbutton on transformer supply with 1 contact block

Pilot light with transformer lamp holder module on 3 module clip

Illuminated pushbutton on transformer supply with 1 or 2 contact blocks using a second-row clip for the transformer

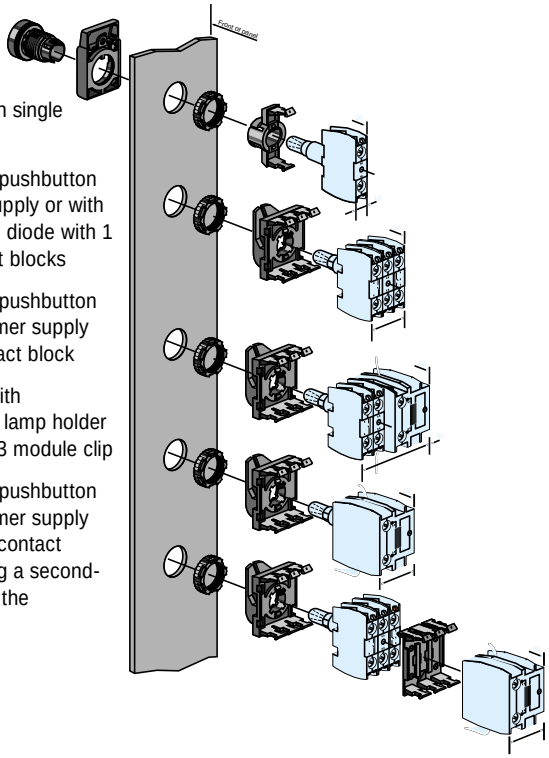

Single Handed Mounting

For easier and quicker assembly all of the auxibloc heads are rounded with an autogrip ring. This ring ensures that the head is held securely in place on the panel and affords one-man mounting even on large scale panels. In addition this ring reduces the risk of the head-turning when the locking ring is tightened up thus avoiding the necessity for later re-alignment of the heads.

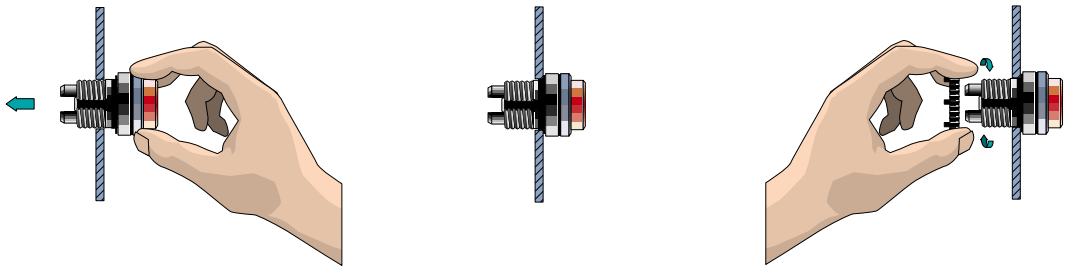

AUXIBOX EQUIPPED CONTROL STATIONS IP65

	Type	Function	Colour	Text/Symbol	Contacts	Part Number
	Flush pushbutton, spring return	START	Green	I	1 x NO (Rear Mounted)	BX101-10
	Flush pushbutton, spring return	STOP	Red	O	1 x NC (Rear Mounted)	BX106-10
	Mushroom head, Dia 40mm, spring return	STOP	Red	O	1 x NC (Rear Mounted)	BX102-10
	Two position selector switch	OFF-ON	Black	O I	1 x NO (Rear Mounted)	BX125-10
	Two position key switch Key out in both positions	OFF-ON	Black	O I	1 x NO (Rear Mounted)	BX126-10
	2 Spring Return Push Buttons	START STOP	Green Red	I O	1 x NO 1 x NC (Rear Mounted)	BX201-20
	3 Spring Return Push Buttons	UP STOP DOWN	Green Red Green	↑ O ↓	1 x NO 1 x NC 1 x NO (Rear Mounted)	BX304-30
	2 Spring Return Pushbuttons Dia 29 mm Mushroom Head Turn to Reset	UP STOP DOWN	Green Red Green	↑ O ↓	1 x NO 1 x NC 1 x NO (Rear Mounted)	BX3088-30
	Mushroom Head, Dia 40mm Turn to Reset	E STOP	Red	EMERGENCY STOP	1 x NC (Rear Mounted)	BX105-10
	Mushroom Head, Dia 40mm Turn to Reset	E STOP	Red	EMERGENCY STOP	2 x NC (Rear Mounted)	BX105-20

AUXIBOX EQUIPPED CONTROL STATIONS IP65

	Type	Function	Colour	Text/Symbol	Contacts	Part Number
	Mushroom Head, Dia 40mm, Turn to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP	1 x NC (Rear Mounted)	BX173-01
	Mushroom Head, Dia 40mm, Turn to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP	2 x NC (Rear Mounted)	BX173-02
	Mushroom Head, Dia 40mm, Pull to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP	1 x NC (Rear Mounted)	BX153-01
	Mushroom head, Dia 40mm, Pull to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP	2 x NC (Rear Mounted)	BX153-02
	Mushroom Head, Dia 40mm, Key to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP	1 x NC (Rear Mounted)	BX113-01
	Mushroom Head, Dia 40mm, Key to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP	2 x NC (Rear Mounted)	BX113-02
	Mushroom Head, Dia 54mm, Pull to Reset with Indicator Flag, Fulfils EN418	E STOP	Red		1 x NC (Rear Mounted)	BX131-01
	Mushroom Head, Dia 54mm, Pull to Reset with Indicator Flag, Fulfils EN418	E STOP	Red		2 x NC (Rear Mounted)	BX131-02
	Mushroom Head, Dia 40mm, Pull to Reset, Fulfils EN418	E STOP	Red	EMERGENCY STOP PULL TO RESET	1 x NC (Front Mounted)	BX1214-10
	Mushroom Head, Dia 54mm, Pull to Reset with Indicator Flag, Fulfils EN418	E STOP	Red	EMERGENCY STOP PULL TO RESET	1 x NC (Front Mounted)	BX1215-10

AUXIBOX UN-EQUIPPED CONTROL STATIONS IP65



- **Compact and easy to install**
- **Accepts standard pushbuttons & Indicators**
- **Front or rear mount contacts**
- **IP65**

Empty Control Station	Holes	Plastic
Grey lid	1	BX0100
Grey lid	2	BX0200
Grey lid	3	BX0300
Grey lid	5	BX0500
Yellow lid	1	BX0100J

CONTACT MODULES & LAMPHOLDERS

Type	Symbol	Description		Part Number
	 11 12	Normally closed contact for rear mount		ZA5
	 13 14	Normally open contact for rear mount		ZB5
	 X1 X2	Lampholder for direct supply 400V/2.6W max for rear mount		Z3XD5
	 X1 X2	Lamp holder with built in resistor and diode for 230V supply to 130V/2.6W lamp for rear mount		Z3XE5
	 11 12 11 12	Normally closed contacts for front mount	1 x NC 2 x NC	Z1AX1 Z1AA1

Notes (1) Each position can have up to 2 contacts or 1 lampholder only.
(2) Illuminated pushbuttons can not be fitted because it is not possible to fit a contact module and a lampholder in the same position.
(3) Normally closed contacts for front mount can be used in emergency stop applications where the contacts must stay with the actuator when the lid is removed.
(4) Electrical characteristics are the same as for standard contacts, see page 15.

DIMENSIONS AND DRILL PLAN

Dimensions (mm)



	1 Hole	2 Hole	3 Hole	5 Hole
Dim A	74	107	140	206
Dim B	64	94	127	193

Cable Entry - 3 push in for PG13

MODULBOX UN-EQUIPPED CONTROL STATIONS IP65



- **Robust heavy duty station**
- **Plastic or aluminium**
- **Accepts standard pushbuttons and indicators**
- **Front or rear mount contacts**
- **Illuminated pushbuttons possible**
- **IP65**

Empty Control Station	Holes	Aluminium	Plastic
Grey lid	1	BFV0100	BPV0100
Grey lid	2	BFV0200	BPV0200
Grey lid	3	BFV0300	BPV0300
Grey lid	5	BFV0500	BPV0500
Yellow lid	1	BFVJ0100	BPVJ0100

CONTACT MODULES & LAMPHOLDERS

Type	Symbol	Description	Part Number
		Normally closed contact for rear mount	23S01
		Normally open contact for rear mount	23S10
		Lampholder for direct supply 400V/2.6W max for rear mount	23SA
		Normally closed contact for front mount	23E01
		Normally open contact for front mount	23E10
		Lampholder for direct supply 400V/2.6W max for front mount	23EA

Notes (1) Each position can have up to 3 contacts or 1 lampholder and up to 2 contacts.

(2) The rear mount contacts need to be fitted to a rear mount clip part number 233S which comes supplied with each empty control station.

(3) The front mount contacts are standard versions from the pushbutton range and need to be fitted to a standard 3 way clip part number 233E and must be ordered separately.

(4) Electrical characteristics are the same as for standard contacts. See page 15.

DIMENSIONS AND DRILL PLAN

Dimensions (mm)





	1 Hole	2 Hole	3 Hole	5 Hole
Dim A	106	106	145	195
Dim B	90	90	128	178

Cable Entry - 1 screw cut for PG16

Tel 0131 448 2828 Fax 0131 448 2880
e-mail: sales@lpc-uk.com

The Panel Products Catalogue



2001 PRICE LISTS

1. Control & Signalling
2. Camswitches
3. Switch Disconnectors
4. Residual Current Circuit Breakers
5. Relays
6. Timers
7. Control Relays
8. Counters
9. Solid State Relays
10. Solid State Interface Relays
11. Signal Towers, Beacons & Sounders
12. Footswitches

A u t o m a t i o n & C o n t r o l
S p e c i a l i s t s

and a whole lot more!

BACO PUSHBUTTON 2001

ITEM NO.	DESCRIPTION	SALE PRICE 01
1424A	KEY 1424A	£3.26
223E	PCB 3 MODULE CLIP	£0.38
22P10	PCB N/O PIN STYLE CONTACT	£3.44
22PA	PCB LAMP HOLDER PIN STYLE	£3.52
22PE	PCB 'U' HOLDER FOR SHORT PIN	£1.52
230E	SINGLE MODULE CLIP	£0.19
230E01	CONTACT BLOCK NC + CLIP	£1.70
230E10	CONTACT BLOCK NO + CLIP	£1.70
230EA	LAMPHOLDER 400V MAX	£2.28
230ECJG	LAMPHOLDER 230V (130V BULB)	£4.56
231E	OLD STYLE SINGLE MODULE CLIP	£0.19
233E	3 MODULE CLIP	£0.38
233E02	CONTACT BLOCK 2 NC+CLIP	£3.38
233E03	CONTACT BLOCK 3 NC+CLIP	£4.85
233E11	CONTACT BLOCK NO+NC+CLIP	£3.38
233E20	CONTACT BLOCK 2 NO+CLIP	£3.38
233EA01	CONTACT BLOCK NC+LAMP+CLIP	£3.96
233EA02	CONTACT BLOCK 2 NC+LAMP+CLIP	£5.43
233EA10	CONTACT BLOCK NO+LAMP+CLIP	£3.96
233EA11	CONTACT BLOCK NO+NC+LAMP+CLIP	£5.43
233EA20	CONTACT BLOCK 2 NO+LAMP+CLIP	£5.43
233EAFA	TRANSFORMER 110-6V, 23EA+233E	£14.32
233EAT	LAMPHOLDER 400V MAX + DIODE	£4.41
233EVGA	TRANSFORMER LAMP 130-6V, 233E	£10.29
233EVGB	TRANSFORMER LAMP 130-12V, 233E	£10.29
233EVJA	TRANSFORMER LAMP 230-6V, 233E	£10.29
233EVJB	TRANSFORMER LAMP 230-12V, 233E	£10.29
233EVLA	TRANSFORMER LAMP 400-6V, 233E	£10.29
233S	REAR CLIP FOR BPV/BFV BOX'S	£0.20
234E	3 MODULE CLIP FOR 23E11	£0.38
235E	ADDITIONAL SIDE CLIP	£0.36
236E	ADDITIONAL SECOND ROW CLIP	£0.36
23E01	CONTACT BLOCK NC	£1.66
23E01D	CONTACT BLOCK NC FASTON	£1.89
23E01Y7	CONTACT BLOCK NC GOLD PLATED	£4.99
23E10	CONTACT BLOCK NO	£1.66
23E10D	CONTACT BLOCK NO FASTON	£1.89
23E10Y7	CONTACT BLOCK NO GOLD PLATED	£4.99
23E11	CONTACT BLOCK NC+NO(234E ONLY)	£2.85
23EA	LAMPHOLDER 400V MAX	£2.11
23EB	LAMPHOLDER 400V MAX FASTON	£2.29
23ECJG	LAMPHOLDER 230V (130V BULB)	£4.36
23EFB	TRANSFORMER BLOCK 110-12V	£11.87
23EGA	TRANSFORMER BLOCK 130-6V	£9.21
23EGB	TRANSFORMER BLOCK 130-12V	£9.21
23EHA	TRANSFORMER BLOCK 220-6V	£9.88
23EHB	TRANSFORMER BLOCK 220-12V	£9.88
23EJA	TRANSFORMER BLOCK 230-6V	£10.78
23EJB	TRANSFORMER BLOCK 230-12V	£10.78
23ELA	TRANSFORMER BLOCK 400-6V	£10.78
23ELB	TRANSFORMER BLOCK 400-12V	£11.29
23ET	DIODE MODULE	£1.91

23ETT	DIODE MODULE DOUBLE	£2.63
23EVFB	TRANSFORMER LAMPHOLDER 110-12V	£11.05
23EVHA	TRANSFORMER LAMPHOLDER 220-6V	£11.05
23EVJB	TRANSFORMER LAMPHOLDER 240-12V	£11.05
23EW	TRANSFORMER BLOCK LEGEND BLANK	£0.12
23EX	EMPTY MODULE	£0.60
23EY	CONNECTOR MODULE	£2.89
23S01	CONTACTBLOCK NC SERIES BPV	£1.59
23S10	CONTACTBLOCK NO SERIES BPV	£1.59
23SA	LAMPHOLDER 400VMAX SERIES BPV	£1.75
455	KEY PROFILE 455 (PAIR)	£3.26
817271	CAP RED FOR C21AA01	£0.38
817272	CAP GREEN FOR C21AA02	£0.38
817273	CAP BLACK FOR C21AA03	£0.38
817274	CAP YELLOW FOR C21AA04	£0.38
817275	CAP OPAL FOR C21AA05	£0.38
817276	CAP BLUE FOR C21AA06	£0.38
817281	CAP RED FOR C21AB01	£0.66
817282	CAP GREEN FOR C21AB02	£0.66
817283	CAP BLACK FOR C21AB03	£0.66
817284	CAP YELLOW FOR C21AB04	£0.66
817285	CAP OPAL FOR C21AB05	£0.66
817286	CAP BLUE FOR C21AB06	£0.66
817331	CAP RED FOR C20SA10	£0.33
817332	CAP GREEN FOR C20SA20	£0.33
817333	CAP TRANSPARENT FOR C20SA30	£0.33
817334	CAP YELLOW FOR C20SA40	£0.33
817335	CAP OPAL FOR C20SA50	£0.33
817336	CAP BLUE FOR C20SA60	£0.33
818261	CAP RED FOR C21AH10/CH10	£0.28
818262	CAP GREEN FOR C21AH20/CH20	£0.28
818263	CAP TRANSP FOR C21AH30/CH30	£0.28
818264	CAP YELLOW FOR C21AH40/CH40	£0.28
818265	CAP OPAL FOR C21AH50/CH50	£0.28
818266	CAP BLUE FOR C21AH60/CH60	£0.28
818271	CAP RED FOR C21CA01	£0.38
818272	CAP GREEN FOR C21CA02	£0.38
818273	CAP BLACK FOR C21CA03	£0.38
818274	CAP YELLOW FOR C21CA04	£0.38
818275	CAP OPAL FOR C21CA05	£0.38
818276	CAP BLUE FOR C21CA06	£0.38
818291	CAP RED FOR C21AK10/CK10	£0.30
818292	CAP GREEN FOR C21AK20/CK20	£0.30
818293	CAP TRANSP FOR C21AK30/CK30	£0.30
818294	CAP YELLOW FOR C21AK40/CK40	£0.30
818295	CAP OPAL FOR C21AK50/CK50	£0.30
818296	CAP BLUE FOR C21AK60/CK60	£0.30
818301	CAP RED FOR C21CB01	£0.53
818302	CAP GREEN FOR C21CB02	£0.53
818303	CAP BLACK FOR C21CB03	£0.53
818304	CAP YELLOW FOR C21CB04	£0.53
818305	CAP OPAL FOR C21CB05	£0.53
818306	CAP BLUE FOR C21CB06	£0.53
BC05Q3	PR12 ENCLOSURE 1-2 CONTACTS	£10.55
BC06Q3	PR12 ENCLOSURE 3-6 CONTACTS	£10.55
BC07Q3	PR12 ENCLOSURE 7-10 CONTACTS	£14.46

BF20V	JOYSTICK CONTACT BLOCK	£5.89
BFV0100	MODULBOX ALUMINIUM 1 HOLE	£26.07
BFV0200	MODULBOX ALUMINIUM 2 HOLE	£26.46
BFV0300	MODULBOX ALUMINIUM 3 HOLE	£31.16
BFV0500	MODULBOX ALUMINIUM 5 HOLE	£35.15
BFVJ0100	MODULBOX ALUMINIUM 1 HOLE YELL	£26.07
BPV0100	BPV EMPTY BOX 1 HOLE GREY	£11.55
BPV0200	BPV EMPTY BOX 2 HOLE GREY	£11.88
BPV0300	BPV EMPTY BOX 3 HOLE GREY	£12.52
BPV0500	BPV EMPTY BOX 5 HOLE GREY	£14.81
BPVJ0100	BPV EMPTY BOX 1 HOLE YELLOW	£11.55
BPVJN11510	MODULE BOX ASSEMBLY	£28.10
BPVJN120-10	BPV BOX SPECIAL	£23.52
BX0100	AUXIBOX EMPTY 1 HOLE GREY	£5.74
BX0100C	BX BOX YELLOW + SPECIAL TEXT	£5.74
BX0100J	AUXIBOX EMPTY 1 HOLE YELLOW	£5.74
BX0200	AUXIBOX EMPTY 2 HOLE GREY	£6.36
BX0200-BEST	BX2090-20 - BEST REF 15112UK	£19.84
BX0300	AUXIBOX EMPTY 3 HOLE GREY	£8.19
BX0500	AUXIBOX EMPTY 5 HOLE GREY	£12.69
BX101-10	AUXIBOX GREEN PUSH-B "START"	£11.56
BX102-10	AUXIBOX DIA40MM MUSH-HD "STOP"	£11.95
BX105-10	AUXIBOX DIA40MM MUSH-HD "STOP"	£14.77
BX105-20	AUXIBOX DIA40MM MUSH-HD "STOP"	£17.71
BX106-10	AUXIBOX RED PUSH-B "STOP"	£11.56
BX113-02	AUXIBOX DIA40MM KEY EN418	£28.67
BX1161-10	AUXIBOX DIA48MM MUSH-HD "STOP"	£21.68
BX125-10	AUXIBOX SEL-SWITCH "ON/OFF"	£14.07
BX126-10	AUXIBOX KEY-SWITCH "ON/OFF"	£21.45
BX131-01	AUXIBOX DIA54MM MUSH-HD+FLAG	£22.67
BX131-02	AUXIBOX DIA54MM MUSH-HD+FLAG	£25.16
BX144-02	AUXIBOX DIA54mm FLAG EN418	£25.09
BX145-02	AUXIBOX DIA54mm FLAG EN418	£25.09
BX146-02	AUXIBOX DIA54mm FLAG EN418	£25.09
BX153-02	AUXIBOX DIA40MM PULL EN418	£20.57
BX173-02	AUIXBOX DIA 40MM TURN EN418	£20.61
BX201-20	AUIXBOX 2 PUSH-B "START/STOP"	£17.11
BX304-30	AUXIBOX 3PUSH-B "UP/DOWN/STOP"	£21.80
BX3088-30	AUXIBOX 3PUSH-B "UP/DOWN/STOP"	£26.90
C20DQ01	MUSH-HD DIA29 PULL EN418 RED	£9.64
C20DR01	MUSH-HD DIA40 PULL EN418 RED	£9.22
C20ER01	MUSH-HD DIA40 TWIST EN418 RED	£11.39
C20GQ01	MUSH-HD DIA29 KEY EN418 RED	£17.59
C20GR01	MUSH-HD DIA40 KEY EN418 RED	£17.33
C20SA10	LENS RIBBED RED	£1.05
C20SA20	LENS RIBBED GREEN	£1.05
C20SA30	LENS RIBBED TRANSP	£1.05
C20SA40	LENS RIBBED YELLOW	£1.05
C20SA50	LENS RIBBED OPAL	£1.05
C20SA60	LENS RIBBED BLUE	£1.05
C20SB10	LENS CLEAR RED	£1.52
C20SB20	LENS CLEAR GREEN	£1.52
C20SB30	LENS CLEAR TRANSP	£1.52
C20SB40	LENS CLEAR YELLOW	£1.52
C20SB50	LENS CLEAR OPAL	£1.52
C20SB60	LENS CLEAR BLUE	£1.52

C20UA21	MUSH-HD DIA54 EN418 FLAG RED	£13.74
C20UA41	MUSH-HD DIA54 EN418 FLAG RED	£13.74
C20UA42	MUSH-HD DIA54 EN418 FLAG RED	£13.74
C21AA01	PUSH-B FLUSH SP-RTN RED	£2.59
C21AA02	PUSH-B FLUSH SP-RTN GREEN	£2.59
C21AA03	PUSH-B FLUSH SP-RTN BLACK	£2.59
C21AA04	PUSH-B FLUSH SP-RTN YELLOW	£2.59
C21AA05	PUSH-B FLUSH SP-RTN WHITE	£2.59
C21AA06	PUSH-B FLUSH SP-RTN BLUE	£2.59
C21AA32301	PUSH-B FLUSH SP-RT GRN "START"	£3.13
C21AA33E01	PUSH-B BLACK SP-RTN ARROW UP	£3.13
C21AA33F01	PUSH-B BLACK SP-RTN ARROW DOWN	£3.13
C21AA36315	PUSH-B FLUSH SP-RT BLUE"RESET"	£3.13
C21AA81	PUSH-B FLUSH SP-RTN RED "O"	£3.13
C21AA82	PUSH-B FLUSH SP-RTN GREEN "I"	£3.13
C21AA83	PUSH-B FLUSH SP-RTN BLACK "I"	£3.13
C21AB01	PUSH-B NON-FL SP-RTN RED	£2.95
C21AB01A70	PUSH-B NONFLUSH SP-RTN RED "O"	£3.51
C21AB02	PUSH-B NON-FL SP-RTN GREEN	£2.95
C21AB03	PUSH-B NON-FL SP-RTN BLACK	£2.95
C21AB04	PUSH-B NON-FL SP-RTN YELLOW	£2.95
C21AB05	PUSH-B NON-FL SP-RTN WHITE	£2.95
C21AB06	PUSH-B NON-FL SP-RTN BLUE	£2.95
C21AC01	MUSH-HD DIA29 SP-RTN RED	£3.44
C21AC02	MUSH-HD DIA29 SP-RTN GREEN	£3.44
C21AC03	MUSH-HD DIA29 SP-RTN BLACK	£3.44
C21AC04	MUSH-HD DIA29 SP-RTN YELLOW	£3.44
C21AD01	MUSH-HD DIA40 SP-RTN RED	£4.34
C21AD02	MUSH-HD DIA40 SP-RTN GREEN	£4.34
C21AD04	MUSH-HD DIA40 SP-RTN YELLOW	£4.34
C21AE01	MUSH HD DIA 70MM SP-RTN RED	£8.88
C21AH10	PUSH-B FLUSH SP-RTN ILL RED	£2.82
C21AH20	PUSH-B FLUSH SP-RTN ILL GREEN	£2.82
C21AH30	PUSH-B FLUSH SP-RTN ILL TRANSP	£2.82
C21AH40	PUSH-B FLUSH SP-RTN ILL YELLOW	£2.82
C21AH50	PUSH-B FLUSH SP-RTN ILL OPAL	£2.82
C21AH60	PUSH-B FLUSH SP-RTN ILL BLUE	£2.82
C21AK10	PUSH-B NON-FL SP-RTN ILL RED	£3.04
C21AK20	PUSH-B NON-FL SP-RTN ILL GREEN	£3.04
C21AK30	PUSH-B NON-FL SP-RTN ILL TRANS	£3.04
C21AK40	PUSH-B NON-FL SP-RTN ILL YELLO	£3.04
C21AK50	PUSH-B NON-FL SP-RTN ILL OPAL	£3.04
C21CA01	PUSH-B FLUSH LATCH RED	£4.96
C21CA02	PUSH-B FLUSH LATCH GREEN	£4.96
C21CA03	PUSH-B FLUSH LATCH BLACK	£4.96
C21CA04	PUSH-B FLUSH LATCH YELLOW	£4.96
C21CA06	PUSH-B FLUSH LATCH BLUE	£4.96
C21CB01	PUSH-B NON-FL LATCH RED	£5.13
C21CB02	PUSH-B NON-FL LATCH GREEN	£5.13
C21CB03	PUSH-B NON-FL LATCH BLACK	£5.13
C21CB04	PUSH-B NON-FL LATCH YELLOW	£5.13
C21CB05	PUSH-B NON-FL LATCH WHITE	£5.13
C21CB06	PUSH-B NON-FL LATCH BLUE	£5.13
C21CH10	PUSH-B FLUSH LATCH ILL RED	£6.44
C21CH20	PUSH-B FLUSH LATCH ILL GREEN	£6.44
C21CH30	PUSH-B FLUSH LATCH ILL TRANSP	£6.44

C21CH40	PUSH-B FLUSH LATCH ILL YELLOW	£6.44
C21CH50	PUSH-B FLUSH LATCH ILL OPAL	£6.44
C21CH60	PUSH-B FLUSH LATCH ILL BLUE	£6.44
C21CK10	PUSH-B NON-FL LATCH ILL RED	£6.71
C21CK20	PUSH-B NON-FL LATCH ILL GREEN	£6.71
C21CK30	PUSH-B NON-FL LATCH ILL TRANSP	£6.71
C21CK40	PUSH-B NON-FL LATCH ILL YELLOW	£6.71
C21EC01	MUSH-HD DIA29 TWIST RED	£5.32
C21EC02	MUSH-HD DIA29 TWIST GREEN	£5.32
C21EC03	MUSH-HD DIA29 TWIST BLACK	£5.32
C21EC04	MUSH-HD DIA29 TWIST YELLOW	£5.32
C21ED01	MUSH-HD DIA40 TWIST RED	£5.74
C21ED02	MUSH-HD DIA40 TWIST GREEN	£5.74
C21EL10	MUSH-HD DIA29 TWIST ILL RED	£5.43
C21GM01	MUSH-HD DIA40 KEY RED	£12.72
C21GM01B	MUSH-HD DIA40 KEY 1424A RED	£12.72
C21GP01	MUSH-HD DIA70 KEY RED	£16.56
C21HA01	PUSH-B ADJUSTABLE RED	£5.21
C21HA02	PUSH-B ADJUSTABLE GREEN	£5.21
C21HA03	PUSH-B ADJUSTABLE BLACK	£5.21
C21HA03-G	PUSH-B BLACK (158mm LENGTH)	£6.29
C21HA04	PUSH-B ADJUSTABLE YELLOW	£5.21
C21HA06	PUSH-B ADJUSTABLE BLUE	£5.21
C21KA03	SEL-SWITCH SH 0-1 STABLE	£4.67
C21KB03	SEL-SWITCH SH 0-1 SP-RTN	£4.67
C21KC03	SEL-SWITCH SH 0-1 STABLE 45DEG	£4.67
C21KD03	SEL-SWITCH SH 0-1 SP-RTN 45DEG	£4.67
C21KE03	SEL-SWITCH SH 0-1 STABLE 90DEG	£4.67
C21KF03	SEL-SWITCH SH 0-1 STABLE 90DEG	£4.67
C21KG51	SEL-SWITCH SH 0-1 STABLE RED	£5.58
C21KG52	SEL-SWITCH SH 0-1 STABLE GREEN	£5.58
C21KG53	SEL-SWITCH SH 0-1 STABLE BLACK	£5.58
C21KG54	SEL-SWITCH SH 0-1 STABLE YELLW	£5.58
C21KH51	SEL-SWITCH SH 0-1 SP-RTN RED	£5.58
C21KH52	SEL-SWITCH SH 0-1 SP-RTN GREEN	£5.58
C21KH53	SEL-SWITCH SH 0-1 SP-RTN BLACK	£5.58
C21KP03	SEL-SWITCH LH 0-1 STABLE	£4.67
C21KQ03	SEL-SWITCH LH 0-1 SP-RTN	£4.67
C21KS03	SEL-SWITCH LH 0-1 SP-RTN	£4.67
C21KT03	SEL-SWITCH LH 0-1 STABLE 90DEG	£4.67
C21KV53	SEL-SWITCH LH 0-1 STABLE BLACK	£5.58
C21LA00	KEY-SWITCH 0-1 STABLE KEYOUT 0	£11.00
C21LA00A	KEY-SWITCH 0-1 STABLE KEY1424A	£11.00
C21LB00	KEY-SWITCH 0-1 SP-RTN KEYOUT 0	£11.00
C21LC00	KEY-SWITCH 0-1 STABLE KEYOUT 0	£11.00
C21LD00	KEY-SWITCH 0-1 SP-RTN KEYOUT 0	£11.00
C21LD00A	KEY-SWITCH 0-1 SP-RTN KEY1424A	£11.00
C21LF00	KEY-SWITCH 0-1 STAB KEYOUT 0	£11.00
C21LG00	KEY-SWITCH 0-1 STAB KEYOUT 0&1	£11.00
C21LH00	KEY-SWITCH 0-1 STAB KEYOUT 0&1	£11.00
C21LK00	KEY-SWITCH 0-1 STAB KEYOUT 1	£11.00
C21MA03	SEL-SWITCH SH 1-0-2 STABLE	£4.67
C21MB03	SEL-SWITCH SH 1-0-2 SP RTN	£4.67
C21MC03	SEL-SWITCH SH 1-0-2 SP-RTN 2-0	£4.67
C21MD03	SEL-SWITCH SH 1-0-2 SP-RTN12-0	£4.67
C21ME51	SEL-SWITCH SH 1-0-2 STABLE RED	£5.58

C21ME52	SEL-SWITCH SH 1-0-2 STABLE GRN	£5.58
C21ME53	SEL-SWITCH SH 1-0-2 STABLE BLK	£5.58
C21ME56	SEL-SWITCH SH 1-0-2 STABLE BLU	£5.58
C21MG51	SEL-SWITCH SH 1-0-2 SP-RTN RED	£5.58
C21MG52	SEL-SWITCH SH 1-0-2 SP-RTN GRN	£5.58
C21MG53	SEL-SWITCH SH 1-0-2 SP-RTN BLK	£5.58
C21MH51	SEL-SWITCH SH 1-0-2 SP-RTN RED	£5.58
C21MH52	SEL-SWITCH SH 1-0-2 SP-RTN GRN	£5.58
C21MH53	SEL-SWITCH SH 1-0-2 SP-RTN BLK	£5.58
C21MH54	SEL-SWITCH SH 1-0-2 SP-RTN YEL	£5.58
C21MK03	SEL-SWITCH SH 1-0-2 STAB 90DEG	£4.67
C21ML53	SEL-SWITCH LH 1-0-2 STABLE BLK	£5.58
C21MP53	SEL-SWITCH LH 1-0-2 SP-RTN	£5.58
C21MR03	SEL-SWITCH LH 1-0-2 STABLE	£4.67
C21MT03	SEL-SWITCH LH 1-0-2 SP-RTN2-0	£4.67
C21MU03	SEL-SWITCH LH 1-0-2 SP-RTN12-0	£4.67
C21NA00	KEY-SWITCH 1-0-2 STAB KEYOUT0	£11.00
C21NC00	KEY-SWITCH 1-0-2 SP-RTN 2-0	£11.00
C21ND00	KEY-SWITCH 1-0-2 SP-RTN 1&2-0	£11.00
C21NK00	KEY-SWITCH 1-0-2 STAB KEY1,0&2	£11.00
C21PA03	TOGGLE SWITCH 2 POS STABLE	£9.05
C21PB03	TOGGLE SWITCH 2 POS SP-RTN	£9.05
C21RA03	KNOB FOR 22.5MM MOUNT S-HANDLE	£2.88
C21RB03	KNOB FOR 22.5MM MOUNT L-HANDLE	£2.88
C21RC00	KNOB FOR 22.5MM MOUNT KEY 1	£7.66
C21RC00A	KNOB FOR 22.5MM MOUNT 1424A	£7.66
C21RD00	KNOB FOR 22.5MM MOUNT KEY 4	£7.66
C21RE00	KNOB FOR 22.5MM MOUNT KEY 6	£7.66
C21RF00	KNOB FOR 22.5MM MOUNT KEY 2	£7.66
C21RG00	KNOB FOR 22.5MM MOUNT KEY 3	£7.66
C21RH00	KNOB FOR 22.5MM MOUNT KEY 5	£7.66
C21RJ00	KNOB FOR 22.5MM MOUNT KEY TYPE	£7.66
C21RL00	KNOB FOR 22.5MM MOUNT KEY TYPE	£7.66
C21RP03	BUTTON FOR POTENTIOMETER 22MM	£9.48
C22AA01	PUSH-B FLUSH SP-RTN RED	£2.18
C22AA02	PUSH-B FLUSH SP-RTN GREEN	£2.18
C22AA03	PUSH-B FLUSH SP-RTN BLACK	£2.18
C22AA04	PUSH-B FLUSH SP-RTN YELLOW	£2.18
C22AA06	PUSH-B FLUSH SP-RTN BLUE	£2.18
C22AA33E01	PUSH-B BLACK SP-RTN ARROW UP	£2.72
C22AA33F01	PUSH-B BLACK SP-RTN ARROW DOWN	£2.72
C22AB01	PUSH-B NON-FL SP-RTN RED	£2.56
C22AB02	PUSH-B NON-FL SP-RTN GREEN	£2.56
C22AB03	PUSH-B NON-FL SP-RTN BLACK	£2.56
C22AH10	PUSH-B FLUSH SP-RTN ILL RED	£2.43
C22AH20	PUSH-B FLUSH SP-RTN ILL GREEN	£2.43
C22AH40	PUSH-B FLUSH SP-RTN ILL YELLOW	£2.43
C22AH50	PUSH-B FLUSH SP-RTN ILL clear	£2.43
C22AH60	PUSH-B FLUSH SP-RTN ILL BLUE	£2.43
C22CA01	PUSH-B FLUSH LATCH RED	£4.95
C22CA02	PUSH-B FLUSH LATCH GREEN	£4.95
C22CA03	PUSH-B FLUSH LATCH BLACK	£4.95
C22CA06	PUSH-B FLUSH LATCH BLUE	£4.95
C22CH10	PUSH-B FLUSH LATCH ILL RED	£6.24
C22CH20	PUSH-B FLUSH LATCH ILL GREEN	£6.24
C22EC01	MUSH-HD DIA29 TWIST RED	£4.92

C22HA03	PUSH-B ADJUSTABLE BLACK	£5.21
C22HA06	PUSH-B ADJUSTABLE BLUE	£5.21
C22KA03	SEL-SWITCH SH 0-1 STABLE 10-2	£4.28
C22KC03	SEL-SWITCH SH 0-1 STABLE 12-2	£4.28
C22KE03	SEL-SWITCH SH 0-1 STABLE 10-2	£4.28
C22KF03	SEL-SWITCH SH 0-1 STABLE	£4.28
C22KG51	SEL-SWITCH SH 0-1 ILL RED	£5.19
C22KG52	SEL-SWITCH SH 0-1 ILL GREEN	£5.19
C22KG53	SEL-SWITCH SH 0-1 ILL BLACK	£5.19
C22KG54	SEL-SWITCH SH 0-1 ILL YELLOW	£5.19
C22KP03	SEL-SWITCH LH 0-1 STABLE	£4.67
C22KT03	SEL-SWITCH LH 0-1 STABLE 90DEG	£4.28
C22LA00	KEY-SWITCH 0-1 STABLE KEYOUT 0	£10.61
C22LC00	NYCKELVRED, 2 FASTA LÄGEN	£10.61
C22LD00	KEY-SWITCH 0-1 SP-RTN 12-2OUT0	£10.61
C22LF00	KEY-SWITCH 0-1 STABLE KEYOUT 0	£10.61
C22MA03	SEL-SWITCH SH 1-0-2 STABLE	£4.28
C22MC03	SEL-SWITCH SH 1-0-2 SP-RTN 2-0	£4.28
C22ME51	SEL-SWITCH SH 1-0-2 ILL RED	£5.19
C22ME52	SEL-SWITCH SH 1-0-2 ILL GREEN	£5.19
C22ME53	SEL-SWITCH SH 1-0-2 ILL BLACK	£5.19
C22ME54	SEL-SWITCH SH 1-0-2 ILL YELLOW	£5.19
C22MH54	SEL-SWITCH SH 1-0-2 ILL YELLOW	£5.19
C22MR03	SEL-SWITCH LH 1-0-2 STABLE	£4.28
C22MU03	SEL-SWITCH LH 1-0-2 SP-RTN	£4.28
C22NA00	KEY-SWITCH 1-0-2 STAB KEYOUT0	£10.61
C22RA03	KNOB FOR 22.5MM MOUNT S-HANDLE	£2.72
C23AD01	MUSH-HD DIA40 SP-RTN RED	£3.91
C23AD02	MUSH-HD DIA40 SP-RTN GREEN	£3.91
C23AD03	MUSH-HD DIA40 SP-RTN BLACK	£3.91
C23AD04	MUSH-HD DIA40 SP-RTN YELLOW	£3.91
C23AE01	MUSH-HD DIA70 SP-RTN RED	£8.50
C23AE03	MUSH-HD DIA70 SP-RTN BLACK	£8.50
C23ED01	MUSH-HD DIA40 TWIST RED	£5.34
C23ED02	MUSH-HD DIA40 TWIST GREEN	£5.34
C23ED03	MUSH-HD DIA40 TWIST BLACK	£5.34
C23ED04	MUSH-HD DIA40 TWIST YELLOW	£5.34
C23ED11	MUSH-HD DIA40 TWIST RED 3 STOP	£6.28
C23EM10	MUSH-HD DIA40 TWIST ILL RED	£5.48
C26AA06	PUSH-B FLUSH SP-RTN BLUE	£2.59
C28DD01	MUSH-HD DIA40 PULL RED	£5.84
C28DL10	MUSH-HD DIA29 PULL ILL RED	£5.89
C28DM10	MUSH-HD DIA40 PULL ILLUMIN RED	£6.18
C28DW01	MUSH-HD DIA40 PULL EN418 RED	£7.88
F24AA01	SUPER FLUSH PB RED	£6.84
F24AA02	SUPER FLUSH PB GREEN	£6.84
F24AA03	SUPER FLUSH PB BLACK	£6.84
F24AA04	SUPER FLUSH PB YELLOW	£6.84
F24AH10	SUPER FLUSH PB ILL RED	£5.31
F24AH20	SUPER FLUSH PB ILL GREEN	£5.31
F24AH30	SUPER FLUSH PB ILL TRANSP	£5.31
F24AH40	SUPER FLUSH PB ILL YELLOW	£5.31
F24AH50	SUPER FLUSH PB ILL WHITE	£5.31
F24AH60	SUPER FLUSH PB ILL BLUE	£5.31
F24SA10	SUPER FLUSH INDICATOR RED	£5.59
F24SA20	SUPER FLUSH INDICATOR GREEN	£5.59

F24SA30	SUPER FLUSH INDICATOR TRANSP	£5.59
F24SA40	SUPER FLUSH INDICATOR YELLOW	£5.59
F24SA50	SUPER FLUSH INDICATOR WHITE	£5.59
F24SA60	SUPER FLUSH INDICATOR BLUE	£5.59
IA1	TEXT PLATE BLANK RED	£0.15
IA1-ENGRAVED	TEXT PLATE CUSTOM ENGRAVED	£0.53
IA3	TEXT PLATE BLANK BLACK	£0.15
IA3-ENGRAVED	TEXT PLATE CUSTOM ENGRAVED	£0.53
IA7	TEXT PLATE BLANK TRANSPARENT	£0.15
IA9	TEXT PLATE BLANK ALUMINIUM	£0.15
IA9-081	IA9 TEXT PLATE "0-1"	£0.32
IA9-091	IA9 TEXT PLATE "I-0-II"	£0.32
IA9-093	IA9 TEXT PLATE "0-1-START"	£0.32
IA9-301	IA9 TEXT PLATE "START"	£0.32
IA9-302	IA9 TEXT PLATE "STOP"	£0.32
IA9-303	IA9 TEXT PLATE "ON"	£0.32
IA9-304	IA9 TEXT PLATE "OFF"	£0.32
IA9-305	IA9 TEXT PLATE "FORWARD"	£0.32
IA9-306	IA9 TEXT PLATE "REVERSE"	£0.32
IA9-309	IA9 TEXT PLATE "SLOW"	£0.32
IA9-310	IA9 TEXT PLATE "FAST"	£0.32
IA9-313	IA9 TEXT PLATE "OPEN"	£0.32
IA9-314	IA9 TEXT PLATE "CLOSE"	£0.32
IA9-315	IA9 TEXT PLATE "RESET"	£0.32
IA9-327	IA9 TEXT PLATE "RUN"	£0.32
IA9-328	IA9 TEXT PLATE "JOG"	£0.32
IA9-3326	IA9 TEXT PLATE "RUNNING"	£0.32
IA9-3327	IA9 TEXT PLATE "TRIPPED"	£0.32
IA9-513	IA9 TEXT PLATE "AUTO"	£0.32
IA9-521	IA9 TEXT PLATE "ALARM"	£0.32
IA9-524	IA9 TEXT PLATE "HAND"	£0.32
IA9-ENGRAVED	TEXT PLATE CUSTOM ENGRAVED	£0.54
IB1	TEXTPLATE BLANK RED	£0.30
IB3	TEXTPLATE BLANK BLACK	£0.30
IB7	TEXTPLATE BLANK TRANSPARENT	£0.30
IB9	TEXTPLATE BLANK ALUMINIUM	£0.30
IB9-081	IB9 TEXT PLATE "0-1"	£0.44
IB9-091	IB9 TEXT PLATE "I-0-II"	£0.44
IB9-093	IB9 TEXT PLATE "0-1-START"	£0.44
IB9-301	IB9 TEXT PLATE "START"	£0.44
IB9-302	IB9 TEXT PLATE "STOP"	£0.44
IB9-303	IB9 TEXT PLATE "ON"	£0.44
IB9-304	IB9 TEXT PLATE "OFF"	£0.44
IB9-315	IB9 TEXT PLATE "RESET"	£0.44
IB9-328	IB9 TEXT PLATE "JOG"	£0.44
IB9-513	IB9 TEXT PLATE "AUTO"	£0.44
IB9-521	IB9 TEXT PLATE "ALARM"	£0.44
IB9-524	IB9 TEXT PLATE "HAND"	£0.44
IB9-583	IB9 TEXT PLATE "HAND-AUTO"	£0.44
IB9-591	IB9 TEXT PLATE "HAND-0-AUTO"	£0.44
IB9-ENGRAVED	TEXTPLATE CUSTOM ENGRAVED	£0.70
IE1	TEXTPLATE BLANK RED	£0.37
IE1-ENGRAVED	TEXTPLATE CUSTOM ENGRAVED	£0.70
IE3	TEXTPLATE BLANK BLACK	£0.37
IE7	TEXTPLATE BLANK TRANSPARENT	£0.37
IE9	TEXTPLATE BLANK ALUMINIUM	£0.37

IE9-ENGRAVED	TEXTPLATE CUSTOM ENGRAVED	£0.70
IF7	FUNCTION LABEL TRANSP BLANK	£0.49
IF9	FUNCTION LABEL ALUMINIUM BLANK	£0.49
IF9-1320	FUNCTION LABEL "PUMP"	£0.60
IF9-1550	FUNCTION LABEL "HEATER"	£0.60
IF9-1577	FUNCTION LABEL "MOTOR"	£0.60
IF9-1587	FUNCTION LABEL "FAN"	£0.60
IF9-1588	FUNCTION LABEL "LIGHTS"	£0.60
IF9-1589	FUNCTION LABEL "COOLING"	£0.60
IF9-1590	FUNCTION LABEL "CONVEY0R"	£0.60
IF9-2346	FUNCTION LABEL "VOLTMETER"	£0.60
IF9-2361	FUNCTION LABEL "AMMETER"	£0.60
IF9-350	FUNCTION LABEL "MAINSWITCH"	£0.60
IF9-ENGRAVED	FUNCTION LABEL CUSTOM ENGRAVED	£0.97
M11	JOYSTICK CONTACT BLOCK	£5.63
M2A	JOYSTICK 2 POSITION SP-RTN	£22.08
M2S	JOYSTICK 2 POSITION	£22.03
M2T	JOYSTICK 2 POSITION SP-RTN	£22.03
MUTEBOX-M	LIGHTGAURD MUTE BOX METAL	£61.14
MUTEBOX-P	LIGHTGAURD MUTE BOX PLASTIC	£42.50
RESETBOX-M	LIGHTGAURD RESET BOX METAL	£36.34
RESETBOX-P	LIGHTGAURD RESET BOX PLASTIC	£21.82
S20JA10C	PILOTLIGHT 230V BULB INC RED	£3.80
S20JA20C	PILOTLIGHT 230V BULB INC GREEN	£3.80
S20JA30C	PILOTLIGHT 230V BULB INC TRANS	£3.80
S20JA40C	PILOTLIGHT 230V BULB INC YELLO	£3.80
S20JA50C	PILOTLIGHT 230V BULB INC OPAL	£3.80
S20JA60C	PILOTLIGHT 230V BULB INC BLUE	£3.80
S20SA10	PILOTLIGHT 400V BULB EXC RED	£2.13
S20SA20	PILOTLIGHT 400V BULB EXC GREEN	£2.13
S20SA30	PILOTLIGHT 400V BULB EXC TRANS	£2.13
S20SA40	PILOTLIGHT 400V BULB EXC YELLO	£2.13
S20SA50	PILOTLIGHT 400V BULB EXC OPAL	£2.13
S20SA60	PILOTLIGHT 400V BULB EXC BLUE	£2.13
T10SA10	LAMP LENS RED (30mm)	£1.96
T10SA20	LAMP LENS GREEN (30mm)	£1.96
T10SA30	LAMP LENS TRANSPARENT (30mm)	£1.96
T10SA40	LAMP LENS YELLOW (30mm)	£1.96
T10SA50	LAMP LENS WHITE (30mm)	£1.96
T10SA70	LAMP LENS ORANGE (30mm)	£1.96
T11AD03	MUSHROOM SP-RTN BLACK (30mm)	£5.53
T11HA04	PUSHBUTTON RESET YELLOW (30mm)	£5.97
T14AA01	PUSHBUTTON SP-RTN RED (30mm)	£5.74
T14AA02	PUSHBUTTON SP-RTN GREEN (30mm)	£5.74
T14AA03	PUSHBUTTON SP-RTN BLACK (30mm)	£5.74
T14AA04	PUSHBUTTON SP-RTN YELLOW 30mm	£5.74
T14AA05	PUSHBUTTON SP-RTN WHITE 30mm	£5.74
T14ED01	MUSH-HD DIA40MM TWIST (30mm)	£9.27
T14GM01B	MUSHROOM HEAD SPEC KEY (30MM)	£24.85
T14HA03	PUSHBUTTON RESET BLACK (30mm)	£7.23
T14KA03	SEL-SW SH 0-1 STAB 45DEG(30mm)	£8.37
T14KF03	SEL-SW SH 0-1 STAB 90DEG(30mm)	£8.36
T14KR03	SEL-SW LH 0-1 STAB 45DEG(30mm)	£8.37
T14MR03	SEL-SW LH 1-0-2 STABLE (30mm)	£8.37
T15SA10	PILOT LIGHT RED (30mm)	£3.15
T15SA40	PILOT LIGHT YELLOW (30mm)	£3.15

T15SA50	PILOT LIGHT WHITE (30mm)	£3.15
T15SA60	PILOT LIGHT BLUE (30mm)	£3.15
T15SA70	PILOT LIGHT ORANGE (30mm)	£3.15
T16AA02	PUSHBUTTON SP-RTN GREEN (30mm)	£4.82
T16AA03	PUSHBUTTON SP-RTN BLACK (30mm)	£4.82
T16AA05	PUSHBUTTON SP-RTN WHITE (30mm)	£4.82
T16AA06	PUSHBUTTON SP-RTN BLUE (30mm)	£4.82
T16AB01	PUSHBUTTON SP-RTN RED (30mm)	£4.73
T16AB03	PUSHBUTTON SP-RTN BLACK (30mm)	£4.73
T16ED01	MUSH-HD DIA40 TWIST RED (30mm)	£6.91
T16KF03	SEL-SW SH 0-1 STAB 90DEG(30mm)	£8.34
T16LF00	KEYSWITCH (30mm)	£17.35
UE05	LEGEND PLATE	£0.84
UE07	LEGEND PLATE	£1.75
V10DV01	MUSH-HD DIA48 PULL EN418 RED	£12.68
V42AA01	PUSH-B SQR FLUSH SP-RTN RED	£2.84
V42AA02	PUSH-B SQR FLUSH SP-RTN GREEN	£2.84
V42AB01	PUSH-B SQR NON-FL SP-RTN RED	£3.10
V42AB03	PUSH-B SQR NON-FL SP-RTN BLACK	£3.10
V62B051	TRIPLETOUCH ARROW UP/DOWN/STOP	£7.43
V62B052	TRIPLETOUCH ARROW UP/DOWN/STOP	£7.43
V62B053	TRIPLETOUCH ARROW UP/DOWN/STOP	£7.43
V62B055	TRIPLETOUCH I/STOP/II	£7.42
V62QA02	TWINPUSH 1-0 GRN-RED	£4.69
V62QA05	TWINPUSH 1-0 WHT-BLK	£4.72
V62QA11	TWINPUSH ARROW UP/DOWN GRN	£4.69
V62QA33C	TWINPUSH ARROW UP/DOWN BLACK	£4.69
V62QB02	TWINPUSH 1-0 GRN-RED(PROJ)	£5.05
V62QH02	TWINPUSH 1-0 GRN-RED + IND	£5.93
V62QH05	TWINPUSH 1-0 WHT-BLK + IND	£5.96
V62QK02	TWINPUSH 1-0 GRN-RED(PROJ)+IND	£6.28
WA0201	BULB EXTRACTOR	£2.74
WA0203	PUSH-B SILICON SHROUD RED	£1.47
WA0204	PUSH-B SILICON SHROUD GREEN	£1.47
WA0205	PUSH-B SILICON SHROUD BLACK	£1.47
WA0206	PUSH-B SILICON SHROUD YELLOW	£1.47
WA0209	PUSH-B ANTI ROTATION RING	£0.14
WA0215	BLANKING PLUG 22.5MM GREY	£1.47
WA0219	ADAPTOR FOR 22.5MMPB,30MM HOLE	£0.99
WA0223	TWINPUSH SILICON SHROUD (PROJ)	£2.23
WA0224	TWINPUSH SILICON SHROUD	£2.23
WA0225	EXTENDED BEZEL	£2.09
WA0226	PUSH-B PADLOCKABLE CAP	£5.82
WA0227	PUSH-B SILICON SHROUD BLUE	£1.47
WA0228	PUSH-B SILICON SHROUD TRANSP	£1.47
WA0229	BLANKING PLUG 22.5MM BLACK	£1.47
WA0230	SQUARE BEZEL FOR 22MM BUTTON	£0.21
WA0234	PUSH-B FIXING TOOL	£1.98
WA0235	PUSH-B FIXING TOOL SPARE KEY	£0.50
WA0238	PUSHBUTTON DIN RAIL ADAPTOR	£2.23
WDF220	NEON BA9S 220V GREEN	£0.76
WDG024	LED-LAMP BA9S 24V GREEN	£2.92
WDL006	LAMP BA9S 6V 1.1W	£0.43
WDL012	LAMP BA9S 12V 2W	£0.48
WDL030	LAMP BA9S 30V 2W	£0.54
WDL048	LAMP BA9S 48V 2W	£0.65

WDL060	LAMP BA9S 60V 2W	£0.74
WDL130	LAMP BA9S 130V 2W	£0.81
WDN220	NEON BA9S 220V	£0.48
WDR024	LED LAMP BA9S 24V RED	£2.92
WDY024	LED LAMP BA9S 24V YELLOW	£2.92
WE00-300	DIA 80 "EMERGENCY STOP" YELLOW	£2.21
WE11	TEXTPLATE BLANK BLACK	£0.70
WE11-091	WE11 TEXT PLATE "I-0-II"	£0.85
WE11-302	WE11 TEXT PLATE "STOP"	£0.85
WE11-303	WE11 TEXT PLATE "ON"	£0.85
WE11-304	WE11 TEXT PLATE "OFF"	£0.85
WE11-305	WE11 TEXT PLATE "FORWARD"	£0.85
WE11-306	WE11 TEXT PLATE "REVERSE"	£0.85
WE11-308	WE11 TEXT PLATE "LOWER"	£0.85
WE11-309	WE11 TEXT PLATE "SLOW"	£0.85
WE11-310	WE11 TEXT PLATE "FAST"	£0.85
WE11-311	WE11 TEXT PLATE "LEFT"	£0.85
WE11-312	WE11 TEXT PLATE "RIGHT"	£0.85
WE11-313	WE11 TEXT PLATE "OPEN"	£0.85
WE11-314	WE11 TEXT PLATE "CLOSE"	£0.85
WE11-315	WE11 TEXT PLATE "RESET"	£0.85
WE11-327	WE11 TEXT PLATE "RUN"	£0.85
WE11-328	WE11 TEXT PLATE "JOG"	£0.85
WE11-335	WE11 TEXT PLATE "UP"	£0.85
WE11-336	WE11 TEXT PLATE "DOWN"	£0.85
WE11-512	WE11 TEXT PLATE "START"	£0.85
WE11-513	WE11 TEXT PLATE "AUTO"	£0.85
WE11-521	WE11 TEXT PLATE "ALARM"	£0.85
WE11-524	WE11 TEXT PLATE "HAND"	£0.85
WE11-583	WE11 TEXT PLATE "HAND-AUTO"	£0.85
WE11-591	WE11 TEXT PLATE "HAND-0-AUTO"	£0.85
WE12	TEXTPLATE BLANK RED	£0.70
WE13	TEXTPLATE BLANK ALUMINIUM	£0.70
WE14	TEXTPLATE BLANK YELLOW	£0.70
WE15	WE15 INSERT - BLANK	£0.36
WE15-2300	WE15 INSERT - ON/OFF	£0.56
WE15-2301	WE15 INSERT - PRE STEAM	£0.56
WE15-2303	WE15 INSERT - FINAL STEAM	£0.56
WE15-2946	WE15 INSERT - TIMER SYMBOL	£0.56
WE15-301	WE15 INSERT "START"	£0.56
WE15-302	WE15 INSERT "STOP"	£0.56
WE15-303	WE15 INSERT "ON"	£0.56
WE15-304	WE15 INSERT "OFF"	£0.56
WE15-305	WE15 INSERT "FORWARD"	£0.56
WE15-306	WE15 INSERT "REVERSE"	£0.56
WE15-307	WE15 INSERT "RAISE"	£0.56
WE15-308	WE15 INSERT "LOWER"	£0.56
WE15-310	WE15 INSERT "FAST"	£0.56
WE15-313	WE15 INSERT "OPEN"	£0.56
WE15-314	WE15 INSERT "CLOSE"	£0.56
WE15-315	WE15 INSERT "RESET"	£0.56
WE15-327	WE15 INSERT "RUN"	£0.56
WE15-330	WE15 INSERT "POWER ON"	£0.56
WE15-3307	WE15 INSERT "INDEX UP"	£0.56
WE15-3308	WE15 INSERT "INDEX DOWN"	£0.56
WE15-335	WE15 INSERT "UP"	£0.56

WE15-336	WE15 INSERT "DOWN"	£0.56
WE15-512	WE15 INSERT "START"	£0.56
WE15-513	WE15 INSERT "AUTO"	£0.56
WE15-521	WE15 INSERT "ALARM"	£0.56
WE15-524	WE15 INSERT "HAND"	£0.56
WE15-A01	WE15 INSERT - ARROW UP 90 DEG	£0.56
WE15-A28	WE15 INSERT "+"	£0.56
WE15-A29	WE15 INSERT "-"	£0.56
WE15-A69	WE15 INSERT "I"	£0.56
WE15-A70	WE15 INSERT "O"	£0.56
WE15-A71	WE15 INSERT - ON/OFF SYMBOL	£0.56
WE15-B62	WE15 INSERT - ARROW UP 45 DEG	£0.56
WE15-C01	WE15 INSERT - STEAM TAP SYMBOL	£0.56
WE16	DIA 60MM YELLOW PLATE BLANK	£2.10
WE16-300	DIA 60 "EMERGENCY STOP" YELLOW	£2.23
WE18	WE18 INSERT - BLANK	£0.36
WE18-303	WE18 INSERT "ON"	£0.56
WE18-304	WE18 INSERT "OFF"	£0.56
WE18-314	WE18 INSERT "CLOSE"	£0.56
WE18-315	WE18 INSERT "RESET"	£0.56
WE18-327	WE18 INSERT "RUN"	£0.56
WE18-330	WE18 INSERT "POWER ON"	£0.56
WE18-513	WE18 INSERT "AUTO"	£0.56
WE18-521	WE18 INSERT "ALARM"	£0.56
WE18-524	WE18 INSERT "HAND"	£0.56
WE7	LEGEND PLATE 48X48	£1.51
WG3	LEGEND PLATE FRAME TYPE IB	£0.39
WKS024	SUPERFLUSH ADAPTOR 30MM HOLE	£4.25
WP3	LEGEND PLATE FRAME TYPE IA	£0.30
WP33301	MODULBOX LEGEND PLATE "START"	£0.59
WP33302	MODULBOX LEGEND PLATE "STOP"	£0.59
WP4	LEGEND PLATE FRAME TYPE IA	£0.43
WP5	LEGEND PLATE FRAME TYPE IE	£0.30
WP6	LEGEND PLATE FRAME TYPE IE	£0.43
Z1AA1	AUXIBOX 2 x N/C FRONT MOUNT	£4.23
Z1AX1	AUXIBOX NC CONTACT FRONT MOUNT	£2.62
Z3XD5	AUXIBOX LAMPHOLDER 400V MAX	£3.14
Z5XE5	AUXIBOX LAMPHOLD 230V 130VLAMP	£8.48
ZA5	AUXIBOX CONTACTBLOCK NC	£2.49
ZB5	AUXIBOX CONTACTBLOCK NO	£2.49

EBT LED's 2001

ITEM NO.	DESCRIPTION	SALE PRICE 01
LED24R	Star Led 24V AC/DC Red	£2.70
LED24G	Star Led 24V AC/DC Green	£3.99
LED24Y	Star Led 24V AC/DC Yellow	£2.70
LED24B	Star Led 24V AC/DC Blue	£3.99
LED24W	Star Led 24V AC/DC White	£3.99
LED130R	Star Led 115V AC Red	£2.92
LED130G	Star Led 115V AC Green	£4.21
LED130Y	Star Led 115V AC Yellow	£2.92
LED130B	Star Led 115V AC Blue	£4.21
LED130W	Star Led 115V AC White	£4.21
LED230R	Star Led 230V AC Red	£2.92
LED230G	Star Led 230V AC Green	£4.21
LED230Y	Star Led 230V AC Yellow	£2.92
LED230B	Star Led 230V AC Blue	£4.21
LED230W	Star Led 230V AC White	£4.21
MLED24R	Mega Star Led 24V AC/DC Red	£5.14
MLED24G	Mega Star Led 24V AC/DC Green	£8.31
MLED24Y	Mega Star Led 24V AC/DC Yellow	£5.14
MLED24B	Mega Star Led 24V AC/DC Blue	£8.31
MLED24W	Mega Star Led 24V AC/DC White	£8.31
MLED130R	Mega Star Led 115V AC Red	£5.94
MLED130G	Mega Star Led 115V AC Green	£9.18
MLED130Y	Mega Star Led 115V AC Yellow	£5.94
MLED130B	Mega Star Led 115V AC Blue	£9.18
MLED130W	Mega Star Led 115V AC White	£9.18
MLED230R	Mega Star Led 230V AC Red	£5.94
MLED230G	Mega Star Led 230V AC Green	£9.18
MLED230Y	Mega Star Led 230V AC Yellow	£5.94
MLED230B	Mega Star Led 230V AC Blue	£9.18
MLED230W	Mega Star Led 230V AC White	£9.18