Satisfy Professional's Needs

Makita®

Cordless Backpack Mist Blower
PM001G

XGT 40V max Li-ion



Solution tank capacity	Max spray range	Continuous run time	Average particle size
	High spraying speed mode	on a full battery charge High spraying speed mode	High spraying speed mode
15 L	**14 m** (horizontal)	**22 min** Battery: BL4080F x2	**50/150 µm** ULV nozzle/Standard nozzle

BL MOTOR

XGT 40Vmax Li-ion



Powered by 40Vmax XGT Li-Ion battery (two in parallel or one)



Automatic battery switching

If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to use to the other one.

Continuous run time
on a full battery charge
High spraying speed mode

22 min

Battery: BL4080F x2

A variety of front covers

Diffusion cover

You can diffuse the mist by attaching the diffusion cover to the end nozzle





Deflector set (Option)

You can discharge the mist upward or downward by attaching the deflector to the end nozzle







Switch Interlocking Valve

The opening/closing operation of the solution supply valve is interlocked with the switch trigger to suppress dripping of solution.

Max spray distance: 14m



3 spraying speed modes



- Selectable with the button on control handle
- With mode memory function
  (In the next operation, the machine will resume operation in the same mode as last time user turn off.)

High spraying speed mode	Long distance spraying allows for outdoor operation.
Medium spraying speed/Low spraying speed mode	For indoor operation or runtime-oriented operation

ULV compatibility

- Compatible with ULV (Ultra Low Volume) spray for pesticides, etc.
- Only available in High spraying speed mode

Nozzle type	Average particle size
ULV nozzle	50μm
Standard nozzle	150μm





Spray amount adjusting dial



Variable grip




Variable speed trigger



Tank filter port diameter: 0.5mm (max)

XGT 40Vmax Li-ion

High Power
Durability
Digital Communication

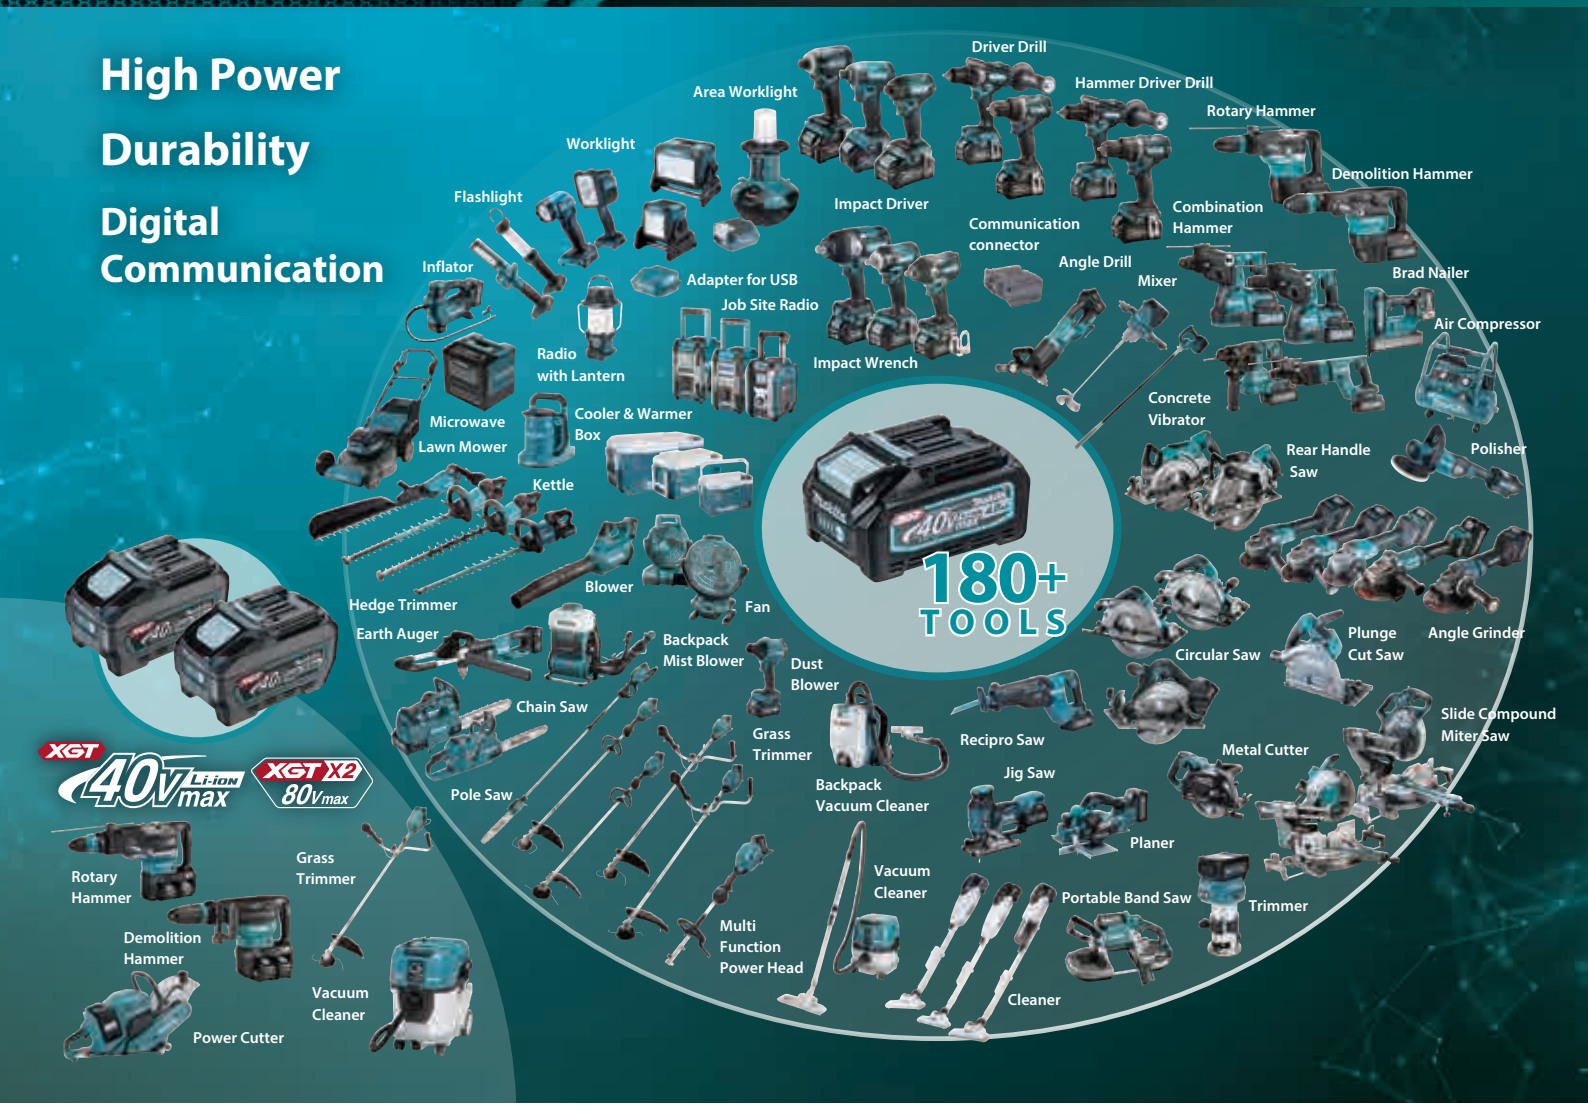

Accessories

Diffusion cover

Part No. 453506-1



Deflector cover

Part No. 198248-7 / 198249-5



Band 25 set

Part No. 196733-4



Charging Time

40Vmax Li-ion	Fast Charging DC40RA	Fast Charging DC40RB	DC40RC	DC40WA
*1BL4050F 5.0Ah	50 min		85 min	260 min
*1BL4080F 8.0Ah	76 min		170 min	420 min

*1 Recommended battery

Cordless Backpack Mist Blower

PM001G

- Variable Speed
- Electronic 3-Speed
- Constant Speed

Chemical tank capacity	*15.0 L (507 oz)*
Max air volume	*High/Med./Low: 14.3/11.0/9.0 m^3/min*
Max air velocity	*High/Med./Low: 64.0/52.0/42.0 m/s*
Avg. air velocity	*High/Med./Low: 53.0/43.0/34.0 m/s*
Vibration level	*2.5 or less*
Sound pressure level	*84.5 dB (A)*
Sound power level	*103.3 dB (A)*
Continuous Use (min.)	*w/ BL4080F x2 High: 20*
Dimensions (L x W x H)	*w/o Nozzle: 320 x 600 x 690 mm (12-5/8 x 23-5/8 x 27-1/4")*
Net weight	*13.2 - 15.7 kg (29.1 - 34.6 lbs.)*

Standard Equipment : Diffusion cover, Wrench, Nozzle, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202302