"AP SERIES" PLAIN TROLLEY
รอกวิ่งบนราง I-Beam ชนิดธรรมดา รุ่น "AP" (ญี่ปุ่น)


VITAL® ไวทัล



KT Code	Model	ความสามารถยก Capacity (tons)	ขนาด I-Beam (mm)				Minimum Revolving Radius (mm)	ราคา
			กว้าง (w)		สูง (h)			
			Min	Max	Min	Max		
V041-0320	05 AP	0.5 t	75	125	100	150	900	
V041-0330	10 AP	1 t	75	125	125	250	1,300	
V041-0340	20 AP	2 t	100	150	150	400	1,500	
V041-0350	30 AP	3 t	100	150	180	400	2,000	
V041-0360	50 AP	5 t	125	175	250	450	2,600	
V041-0370	90 AP	10 t	150	175	250	450	infinity	

"AG SERIES" GEARED TROLLEY
รอกวิ่งบนราง I-Beam ชนิดมีเกียร์ รุ่น "AG" (ญี่ปุ่น)

VITAL® ไวทัล

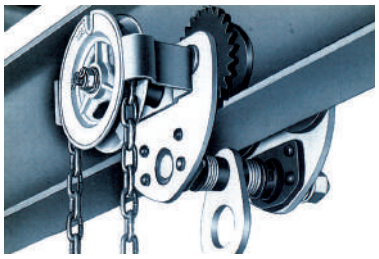

KT Code	Model	ความสามารถยก Capacity (tons)	ขนาด I-Beam (mmn)				Minimum Revolving Radius (mm)	ราคา
			กว้าง (w)		สูง (h)			
			Min	Max	Min	Max		
V041-0390	10 AG	1 t	75	125	125	250	1,300	
V041-0400	20 AG	2 t	100	150	150	400	1,500	
V041-0410	30 AG	3 t	100	150	180	400	2,000	
V041-0420	50 AG	5 t	125	175	250	450	2,600	
V041-0430	90 AG	10 t	150	175	250	450	infinity	

หมายเหตุ : AG พร้อมโซ่สาวระยะ 2.5m จากรอก

F

"SV SERIES" V-SLING BELT (POLYESTER)
เข็มขัดยกของ รุ่น "SV" (ญี่ปุ่น) ผลิตจากโพลีเอสเตอร์พิเศษ

VITAL® ไวทัล




KT Code	Model	ความกว้างเข็มขัด	ความยาว (m)	ราคา (เส้นละ)
V042-0010	SV-50-2	50 mm (2")	2 m	
V042-0020	SV-50-3	50 mm (2")	3 m	
V042-0030	SV-50-4	50 mm (2")	4 m	
V042-0040	SV-50-5	50 mm (2")	5 m	
V042-0050	SV-50-6	50 mm (2")	6 m	
V042-0060	SV-75-2	75 mm (3")	2 m	
V042-0070	SV-75-3	75 mm (3")	3 m	
V042-0080	SV-75-4	75 mm (3")	4 m	
V042-0090	SV-75-5	75 mm (3")	5 m	
V042-0100	SV-75-6	75 mm (3")	6 m	

The standard length are 2, 3, 4, 5 and 6 meters, although any other length up to 20 meters can be manufactured on request.

TECHNICAL INFORMATION : "SV SERIES" V-SLING BELT (POLYESTER)
ข้อมูลทางด้านเทคนิค ของเข็มขัดยก รุ่น "SV"

The standard lengths are 2, 3, 4, 5 and 6 meters, although any other length up to 20 meters can be manufactured on request.



SV 50-3
- L (m)
- W (mm)
- Type

The body of each sling is of a double construction (Safety Factor ; 6.25)

Width of sling W (mm)	Straight hanging	Choke hanging	2-point hanging	
			at 60 degrees	at 90 degrees
25	0.8 tf	0.64 tf	1.36 tf	1.12 tf
	8.0 KN	6.4 KN	13.6 KN	11.2 KN
	800 kgf	640 kgf	1360 kgf	1120 kgf
50	1.6 tf	1.28 tf	2.72 tf	2.24 tf
	16.0 KN	12.8 KN	27.2 KN	22.4 KN
	1600 kgf	1280 kgf	2720 kgf	2240 kgf
75	2.5 tf	2.0 tf	4.25 tf	3.5 tf
	25.0 KN	20.0 KN	42.5 KN	35.0 KN
	2500 kgf	2000 kgf	4250 kgf	3500 kgf

CHAIN BLOCK
รอกเปิด-ปิดประตูใช้มือ รุ่น "VG" (ญี่ปุ่น)

VITAL® ไวทัล

KT Code	Model	ความสามารถ Capacity (tons)	ราคา
V041-0500	VG-15	1.5 t	

หมายเหตุ : V041-0500 ราคาเฉพาะตัวไม่รวมโซ่

