


Double Action Air Nipper (Square Type)

GT-NWS1/ 10/ 20/ 30

Blade opening and closing is driven by air piston.

Maintenance is easy because there are no spring parts in the nipper body and blade.

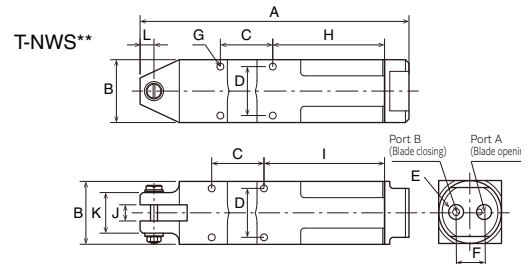

Capacity ϕ (mm)				Code No.	Model No.	Size(mm)													Air Consumption (cm ³ /str.)	Applied Pressure (N)	Weight (g)	Hose I/D (mm)	JAN (4907587)
Soft Plastic	Hard Plastic	Copper	Steel			A	B	C	D	E	F	G	H	I	J	K	L						
	2.0	1.0	0.5	360702	GT-NWS1	95	20 x 18	40	16	M5-P0.8	9	M3 Depth4.5	-	32	5	16	6	95	0.4~0.5	95	I/DØ2.5 x O/DØ4	309730	
4.3	4.0	1.8	1.2	360706	GT-NWS10	146	36 x 36	30	28	PT1/8	16	M4 Depth6	64	69	9	23	8	146	0.4~0.5	146	I/DØ4 x O/DØ6	309778	
6.8	6.5	2.6	2.0	360707	GT-NWS20	176	45 x 45	40	36	PT1/8	18	M4 Depth8	68.5	73.5	12	26	9.5	165	0.4~0.6	165	I/DØ4 x O/DØ6	309785	
9.8	7.5	3.3	2.8	360708	GT-NWS30	231	56 x 56	60	46	PT1/8	24	M5 Depth12	84.5	94.5	17	36	13	230.5	0.4~0.6	230.5	I/DØ4 x O/DØ6	309891	

※The capacity is for reference only when mounting a standard blade. Subject to the blade type and the material of the product to cut.


※Overall length, Weight: Accessories not included.

Double Action Air Nipper (Round Type without Lever)

GT-NWR10/ 20/ 30

Blade opening and closing is driven by air piston.

Maintenance is easy because there are no spring parts in the nipper body and blade.

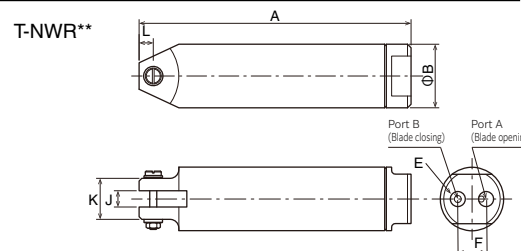

Capacity ϕ (mm)				Code No.	Model No.	Size(mm)							Air Consumption (cm ³ /str.)	Applied Pressure (N)	Weight (g)	Hose I/D (mm)	JAN (4907587)
Soft Plastic	Hard Plastic	Copper	Steel			A	B	E	F	J	K	L					
4.3	4.0	1.8	1.2	360710	GT-NWR10	154	36	PT1/8	16	9	23	8	146	0.4~0.5	95	I/DØ4 x O/DØ6	309808
6.8	6.5	2.6	2.0	360711	GT-NWR20	159.5	45	PT1/8	18	12	26	9.5	165	0.4~0.6	165	I/DØ4 x O/DØ6	309815
9.8	7.5	3.3	2.8	360712	GT-NWR30	231.5	56	PT1/4	24	17	36	13	230.5	0.4~0.6	230.5	I/DØ4 x O/DØ6	309822


※The capacity is for reference only when mounting a standard blade. Subject to the blade type and the material of the product to cut.

※Overall length, Weight: Accessories not included.

Straight blades for plastic

AJ

Plastic AJ/Upright blade with an unbeveled cutting edge for plastic. Can be applied at a right angle to the gate.

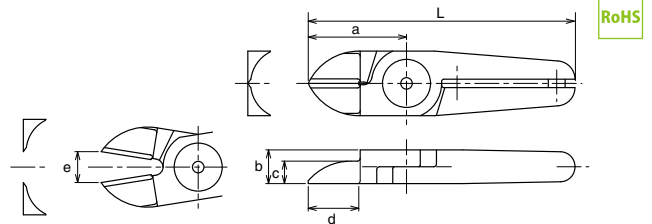


NWR NWS

Capacity ϕ (mm)				Code No.	Model No.	Size(mm)						Weight (g)	Applicable Models	JAN (4907587)
Soft Plastic	Hard Plastic	Copper	Steel			a	b	c	d:Effective Length	e	L			
4.3	4.0	1.0	0.5	360454	NW10AJ	30	9	6	14	5	85	28	GT-NWR10 / NWS10	370716
6.8	6.5	1.6	1.0	360457	NW20AJ	40	12	6	21.5	8	100	68	GT-NWR20 / NWS20	370723
8.5	7.5	2.6	2.0	360461	NW30AJ	55	17	8	33	11	140	150	GT-NWR30 / NWS30	370761

Straight blades for metal

BJ

Metal Straight shape blade (flat shape) for metal.

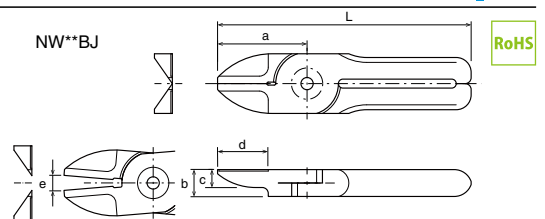

NWR NWS

Capacity ϕ (mm)				Code No.	Model No.	Size(mm)						Weight (g)	Applicable Models	JAN (4907587)
Soft Plastic	Hard Plastic	Copper	Steel			a	b	c	d:Effective Length	e	L			
		1.0	0.5	360450	NW1BJ	20	5	3	10.5	3.5	50	16	GT-NWS1	370006
		1.8	1.2	360453	NW10BJ	30	9	6	14	5	85	76	GT-NWR10 / NWS10	370709
		2.6	2.0	360459	NW20BJ	40	12	6	21.5	8	100	142	GT-NWR20 / NWS20	370747
		3.3	2.8	360460	NW30BJ	55	17	8	29.5	11	140	367	GT-NWR30 / NWS30	370754