D-Series




The D-Series toggle switches are single pole and have ratings up to 20 amps and 1-1/2 horsepower. These switches have a nylon toggle and base, and are also available with integrated wire leads.


Specifications


- Certifications*: UL, CSA
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Nylon
- Bushing Material: Polycarbonate


* Due to ongoing technological advances, consult factory for certification specifics.


Dimensional Specifications: in. [mm]

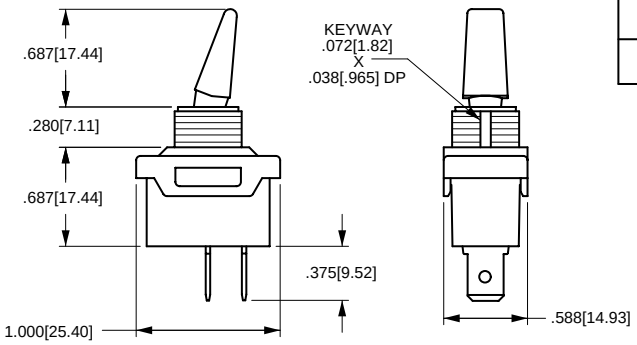

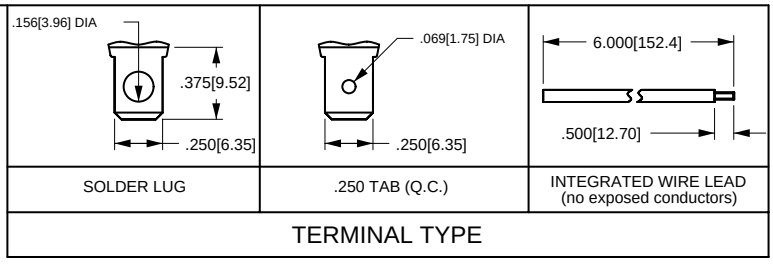







D	A	22	1	-	P	B	-	B

SERIES

D SINGLE POLE TOGGLE

CIRCUIT

A ON-NONE-OFF
B ON-NONE-ON
C ON-OFF-ON

RATING

10 5A 250VAC
10A 125VAC
1/2HP 125-250VAC
11 5A 250VAC
10A 125VAC
22 10A 250VAC
20A 125VAC
1 1/2HP 125-250VAC
23 10A 250VAC
20A 125VAC
60 3A 250VAC
6A 125VAC
1/4HP 125-250VAC

TERMINATION

0 SOLDER LUG
1 .250TAB (QC)
5 WIRE LEAD

TOGGLE STYLE

B BAT



P PADDLE



TOGGLE COLOR[1]

B BLACK
W WHITE

BUSHING[1]

B BLACK
W WHITE

NOTES:
Shading indicates standard configurations.
Available with neoprene seal. Consult factory.
1 Custom colors are available. Consult factory.