brainboxes
Accessories

CC-869

Screw Terminal Wired 9 Pin D Connector

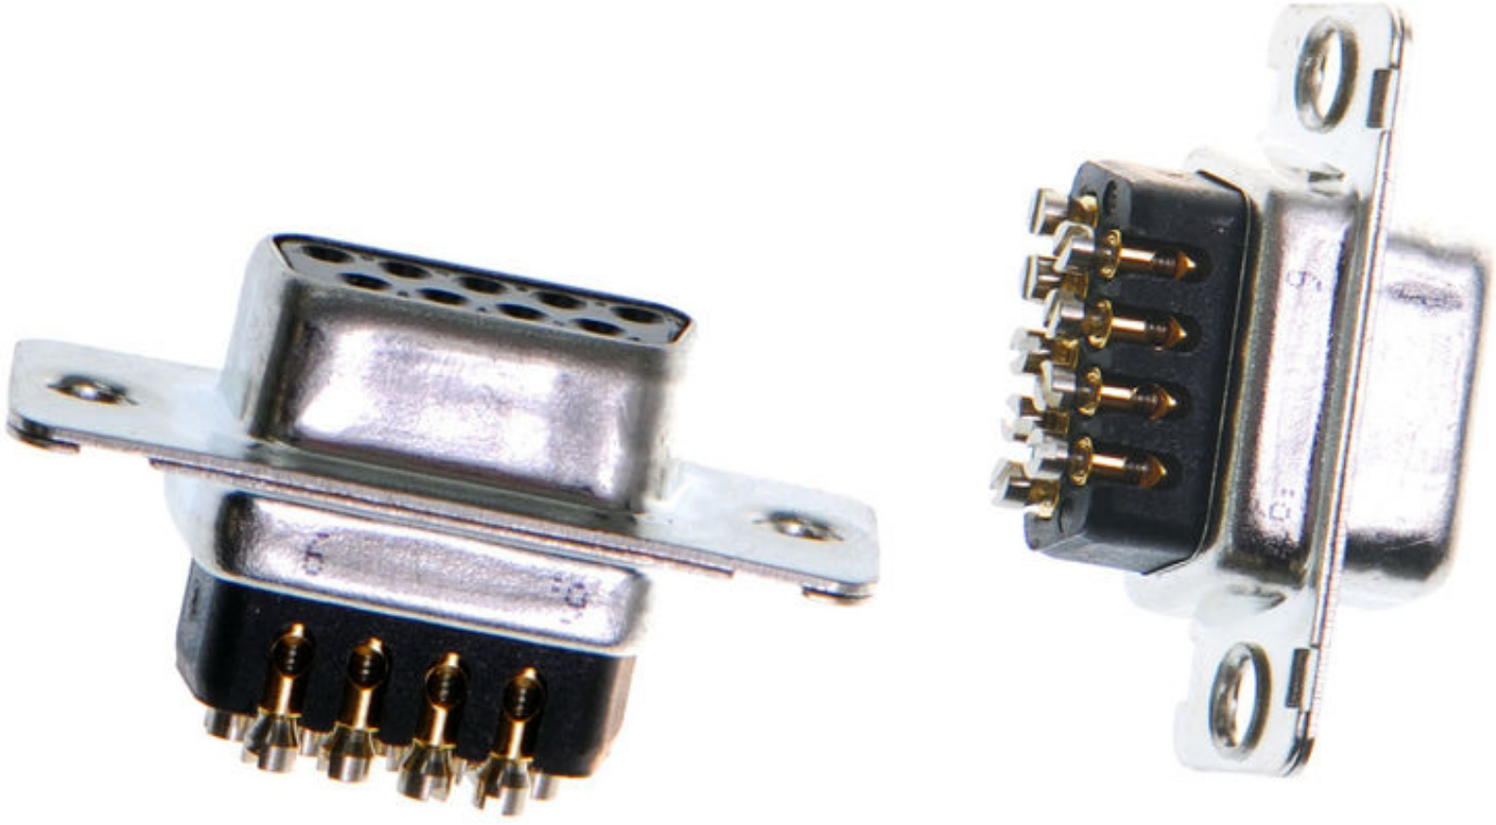

CC-869

Screw Terminal Wired 9 Pin D Connector







The CC-869 is suitable for wiring Screw Terminal connections into a standard 9 Pin D connector, ideal for quick but secure solderless connections in the field.

- 9 Pin D female connector
- Screw Terminal contact brass with nickel-plating
- Insulating plastic back shell, with cable strain relief



Many industries use stripped wire screw terminals as the de facto connection method. This adapter enables devices with the ubiquitous 9 pin male D to be used in these situations.

RS422/485		RS232
Pin 1	TXD-	DCD
Pin 2	TXD+	RXD
Pin 3	RTS-	TXD
Pin 4	RTS+	DTR
Pin 5	GND	GND
Pin 6	RXD-	DSR
Pin 7	RXD+	RTS
Pin 8	CTS	CTS
Pin 9	CTS+	RI

Pinout (9 Pin)

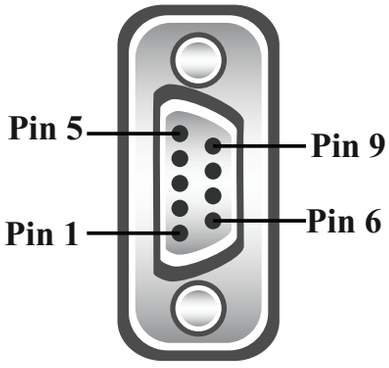

Please refer to the manufacturer's information for the product you wish to connect.

To fit CC-869 you will need: wire cutters, wire strippers, small screw driver (not included).



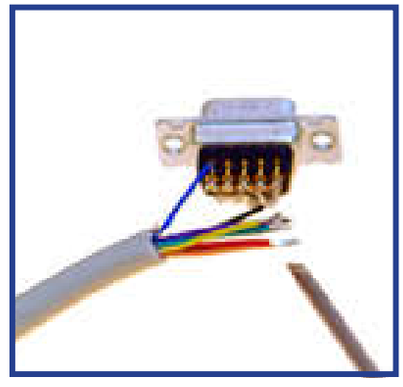
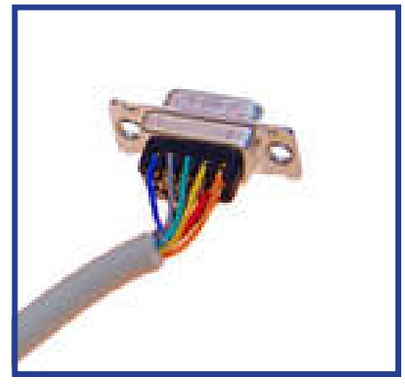

- Prepare wire to be connected
- Insert trimmed wire into appropriate terminal connection - tighten screws to secure connection




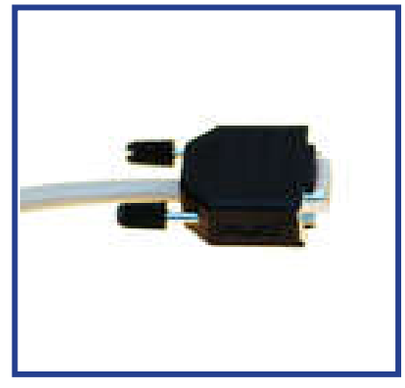

- Clip the wired connector in to the plastic housing
- Secure the cable using the cord grip
- Push the two halves of the plastic casing together until they click.

brainboxes
www.brainboxes.com

Brainboxes

18 Hurricane Drive,
Liverpool International Business Park,
Speke, Liverpool,
L24 8RL

Tel: +44 (0) 151 220 2500
Fax: +44 (0) 151 252 0446

Email: sales@brainboxes.com
Web: www.brainboxes.com

Brainboxes - USA

14004 Roosevelt Boulevard
Suite 601H, Clearwater,
Florida 33762
United States
Tel: +1 (919) 241 8487
Fax: +1 (727) 538 4237
Email: Owen@brainboxes.com

Brainboxes - Japan

8-26-5-506 Kamedio,
Koto-ku
Tokyo, 136-0071
Japan
Tel: +81-3-3683-0509
Fax: +81-3-3683-0509
Email: r-kibe@brainboxes.co.jp

nqa. ISO 9001 Registered
nqa. ISO 14001 Registered
RoHS
AEO GB AEOF 00031/11
TAA Compliant
Microsoft Partner
EST 1984