COOPER Bussmann

Fast-Acting ¼" x ⅞" Glass Tube Fuses

AGW Series

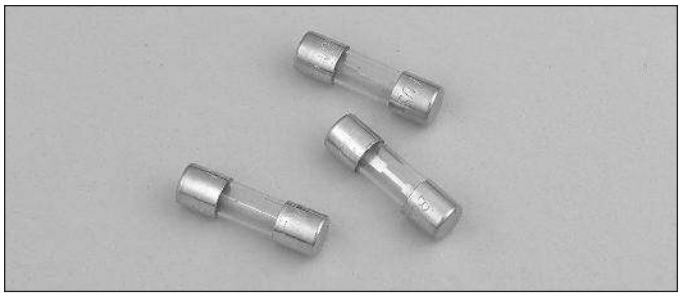

Dimensions - in

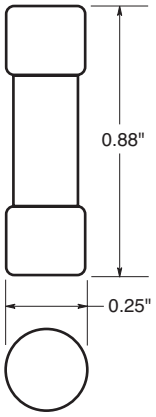

Description

- Fast-acting
- ¼" x ⅞" (6.3 x 22.2mm) physical size
- Glass tube, nickel-plated brass endcap construction
- Mounts in in-line holders HHB (data sheet # 2103), HHK, HRK (data sheet # 2111) or PCB fuseclips for ¼" fuses (1A1119, 1A1120, 1A1907, 1A3398, 1A4533 and 1A4534 - data sheet # 2131)

Ordering

Specify product code

- Insert packaging code prefix before part number, E.g., BK/AGW-1

Specifications				
Part Number (Amps)	Voltage Rating Vac	Interrupting Rating (amps) at Rated Voltage AC	Typical DC Cold Resistance (Ω)*	
			Lower	Upper
AGW-1	32	1000	0.100	0.135
AGW-1-½	32	1000	0.060	0.080
AGW-2	32	1000	0.042	0.056
AGW-2-½	32	1000	0.029	0.040
AGW-3	32	1000	0.027	0.036
AGW-4	32	1000	0.018	0.024
AGW-5	32	1000	0.013	0.018
AGW-6	32	1000	0.010	0.014
AGW-7-½	32	1000	0.009	0.012
AGW-10	32	1000	0.006	0.008
AGW-15	32	1000	0.003	0.005
AGW-20	32	1000	0.002	0.003
AGW-25	32	1000	0.002	0.003
AGW-30	32	1000	0.001	0.002

* DC Cold Resistance (Measured at <10% of rated current)

Time-Current Curves

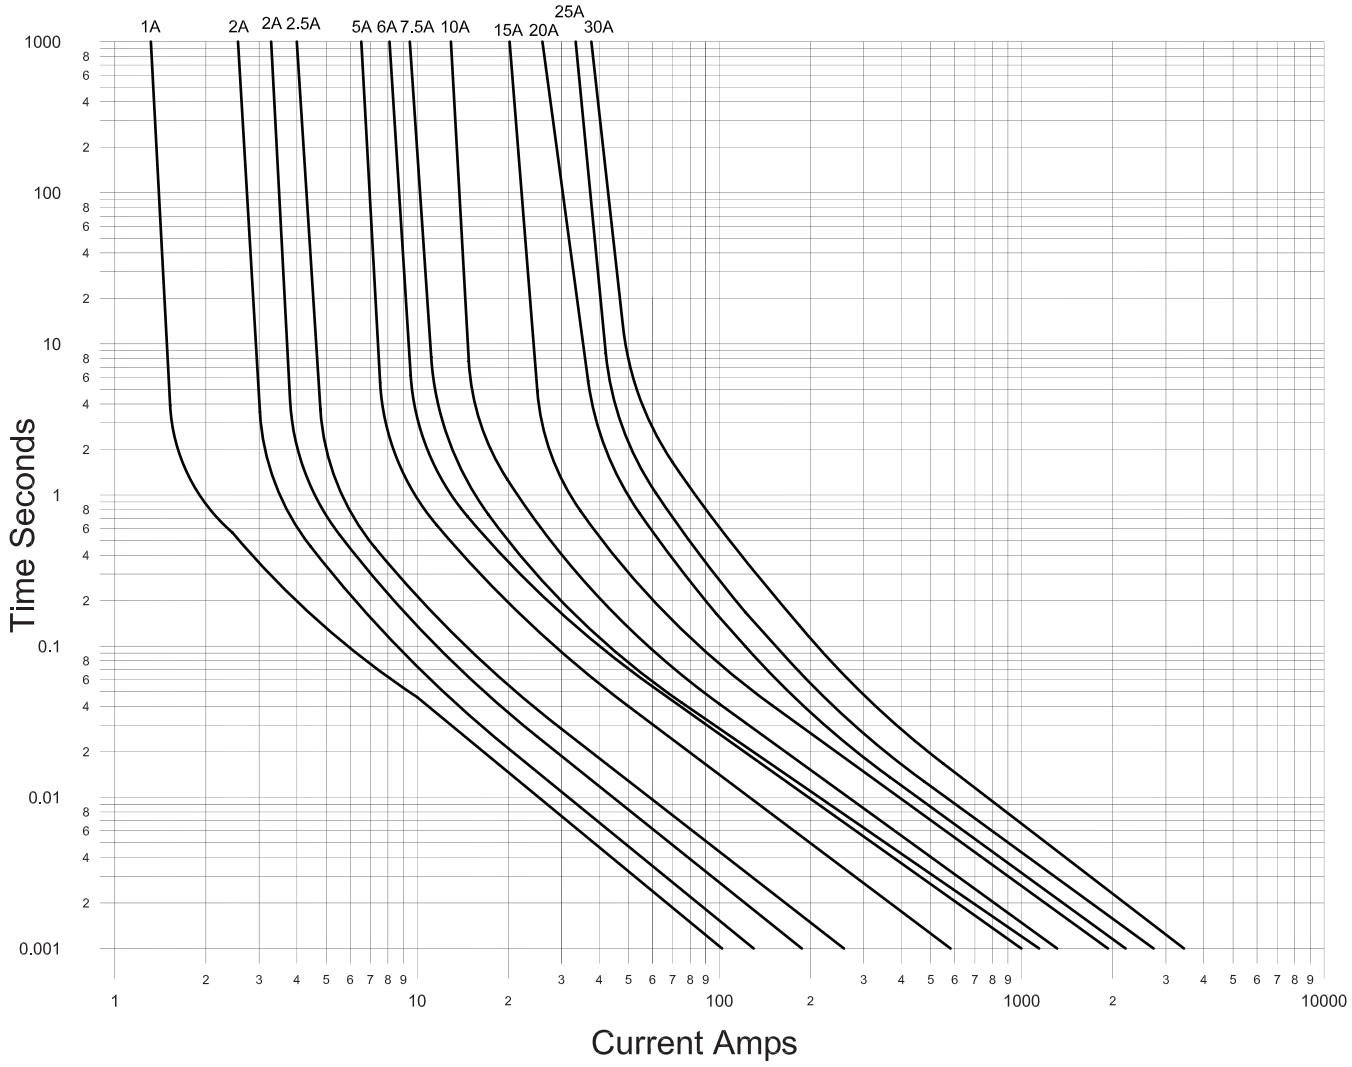

Packaging Code	
Packaging Code Prefix	**Description**
BK	100 fuses packed into a cardboard carton

© 2013 Cooper Bussmann
www.cooperbussmann.com

COILTRONICS® COOPER Bussmann™ PowerStor®