Industrial Gland Kits

AXT Brass Gland Kit
AXT-K Series

BICON

Application

> Indoor/outdoor type for flexible wire braid cable (e.g CY or SY types)

Features & Benefits

> For circular unarmoured, or wire braid armoured or screened, plastic or rubber sheathed cables
> Superior retention capability
> Zero Halogen - high temperature silicone seals, LUL approved. Rated between -50°C and 200°C
> IP66/IP68 seal (tested to a depth of 10m for 168 hours)
> Improved cable range accommodation

Technical Data

> EN 50262
> Quicker and easier to install
> CuZn39Pb3 brass alloy used for guaranteed strength and performance
> In kit form, comprising of 2 glands complete with locknut, washers, earth tag and shroud



CE

Ref: AXT/03/07

Prysmian Cables & Systems Limited, Components Unit, Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9HP, UK
Commercial Enquiries, Tel +44 (0) 845 767 8345, Fax: +44 (0) 23 8029 5465
www.prysmian.co.uk

PRYSMIAN CABLES & SYSTEMS

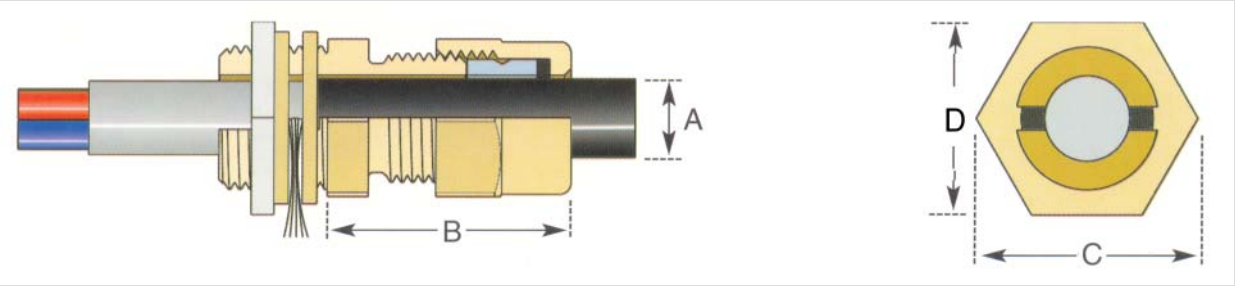

Gland Details

Gland kit	Cable diameter A		Across Corners C mm	Protrusion Length B mm	Kit reference
	Min mm	Max mm			
20S	5.5	11.5	24.72	34.0	AXT20SK
20	8.0	16.0	28.70	44.0	AXT20K
25	11.5	21.0	36.87	46.0	AXT25K

NB. Entry Thread length = 15mm

Prysmian Cables & Systems Limited, Components Unit, Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9HP, UK
Commercial Enquiries, Tel +44 (0) 845 767 8345, Fax: +44 (0) 23 8029 5465
www.prysmian.co.uk