ROOFTOP PYRAMID ST FIXED STRUT SUPPORT, 254 MM X 122 MM

CATALOG NUMBER

PSF10C



CERTIFICATIONS

FEATURES

- Provides superior support for pipe, conduit, cable tray and equipment
- Foam bottom offers low abrasion interface for better roof membrane protection
- Compatible with roof surfaces including single ply, bituminous, metal and spray foam
- Provides superior load distribution, even with varying rooftop surfaces
- Ready to use out of the box, saving installation time and labor
- Multiple sizes and load ratings offer the ability to tailor the solution to the application
- Easy to transport to the roof
- Hot-dip galvanized and UV stabilized for long lasting performance

PRODUCT ATTRIBUTES


- Article Number: 360464
- Material: Polyethylene; Polypropylene; Steel
- Finish: Hot-Dip Galvanized

Temperature: −45 to 65 °C
Static Load Safety Factor: 3:1
Length 1: 254 mm
Length 2: 317.5 mm
Height: 122 mm
Width: 203 mm
Surface Area: 59355 mm²
Unit Weight: 1 kg
Static Load: 4450 N

ADDITIONAL PRODUCT DETAILS

Static load at 73.1 kPa (10.6 psi) roof loading. Contact project or roofing engineer for maximum allowable load on individual project roof system.

DIAGRAMS

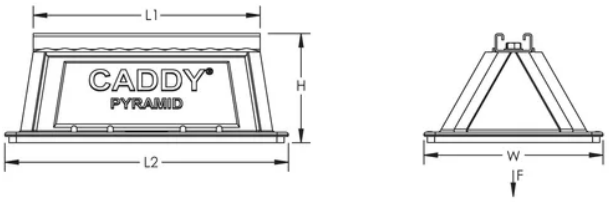

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.