Analogue time switch modules - FM/1 QRTuZH

Item No 02.76.0075.1 / EAN Code 4010940000592



PRODUCT DESCRIPTION

APPLICATIONS

- Household devices control
- Gas boilers control
- Devices, motors or pumps control

TECHNICAL DATA

Electrical Data	
Supply voltage	DC 130 V
	AC 230 V ± 10% 50-60 Hz
Curret output	Changeover, potential free
Current capacity - ohmic load	16 A / 250 V AC
	21 A / 250 V AC (UL)
Current capacity - inductive load cos.phi 0.6	8 A / 250 V AC
Switching capacity - minimal	100 mA / 20 V AC/DC
Load incandescent bulb	1.350 W
Power consumption	2 VA
Accuracy	± 1,5 Second /Day at 20°C
Power reserve	> 150 Hours
Power connection	
Device	Flat connection DIN 6.3
Operating specifications	
Manual switch	Automatic mode
	Fix ON/OFF
Channels	1
Program	Daily program (ON/OFF)
Display and format	
Shortest switching time	ON/OFF 15 Minutes
Operating conditions	
Temperature (operation)	-20° C ... +55° C
General specifications	
Drive type	Quartz
Colour	Gray
Weight	75 g
Dimension	60 x 60 x 32 mm
	###

21 mm (T) mounting depth

Compliance with standards	
Protection class	II, according to corresponding mounting
Approval mark	CE
Standards and guidelines	EN 60730-1
	EN 60730-2-7

DIMENSIONAL DRAWINGS

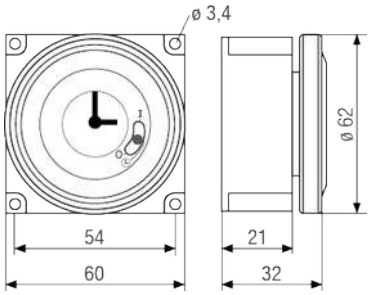

CIRCUIT DIAGRAMS

