
HIRSCHMANN® Test & Measurement
A BRAND OF SKS


SKS Kontakttechnik GmbH

Measuring leads

PL 2700 S W

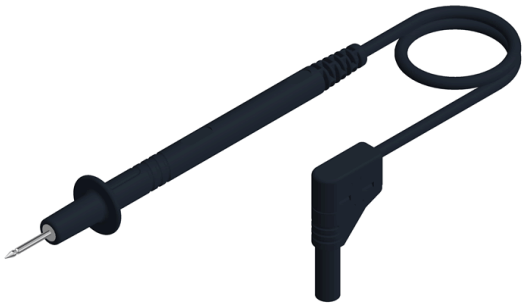

4 mm safety system

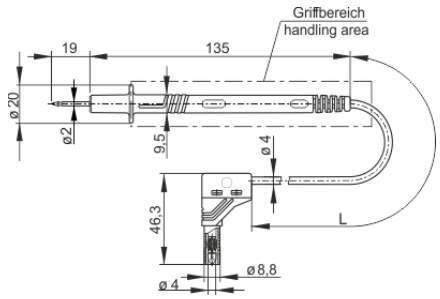Product	PL 2700 S W
description	Safety test lead with test probe. Tip for penetration of oxide layers and 4 mm diameter safety connector with right-angled outlet. Highly flexible, double insulated stranded lead, shatter-proof grip sleeve and lead. Built in color indicator for easy indentification of insulation damages.
article-no. / *colour	9341551xx 00 black 01 red Ni
drawing	
	
technical data	
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current(1) (consider derating curve)	16 A
material plug	brass, nickel plated
housing material	PA, PP
temperature range acc. To IEC61010(2)	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
cable length	100 cm
conductor size	1 mm²
cable material	PVC

contact resistance	20 mOhm
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
stand: 21.03.2019