
NOTES:


1. PACKAGING:
   SHIPPED UNASSEMBLED. HARDWARE PACKAGED IN SEPERATE PLASTIC BAG. HARDWARE, HANDLE AND FACEPLATE IN PLASTIC BAG WITH LABEL.

2. MATERIAL:
   HANDLE: POLYPROPYLENE, GLASS REINFORCED
      COLOR: BLACK
   FACEPLATE: POLYPROPYLENE, GLASS REINFORCED
      COLOR: BLACK
      (2) 4-40UNC-2B, STAINLESS STEEL INSERTS
   HARDWARE:
      CROSS BOLT, NUT AND LOCKWASHER: STAINLESS STEEL,
      FACEPLATE SCREWS AND LOCKWASHERS: STAINLESS STEEL
      STRAIN RELIEF SCREWS: STEEL,


3. HARDWARE SPECIFICATIONS:
      CROSS BOLT AND NUT: 10-32UNF-2A, 1.375" LONG
         BUTTON HEAD HEX DRIVE WITH SPLIT LOCK WASHER
      (2) FACEPLATE SCREWS: 4-40UNC-2A, 1.500" LONG
         BUTTON HEAD HEX DRIVE WITH SPLIT LOCK WASHER
      STRAIN RELIEF: HI-LO TYPE SELF THREADING SCREW

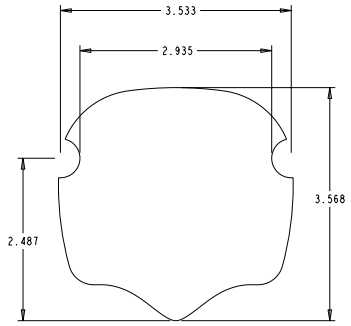



MAX AREA FOR SWITCH PLACEMENT IN FACEPLATE
SCALE 1:1



DETAIL A
SEAL RING GROOVE DETAIL
SCALE 5:1

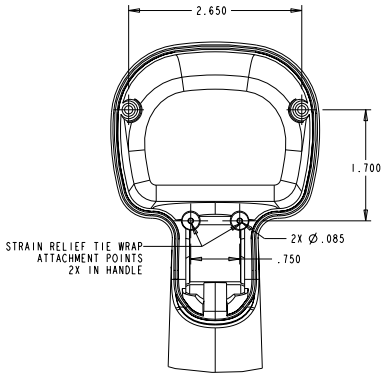

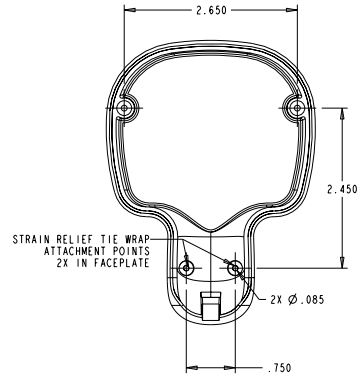




TIE WRAP WITH SCREW ATTACHMENT POINT




HI-LO TYPE SELF THREADING SCREW


STRAIN RELIEF HARDWARE

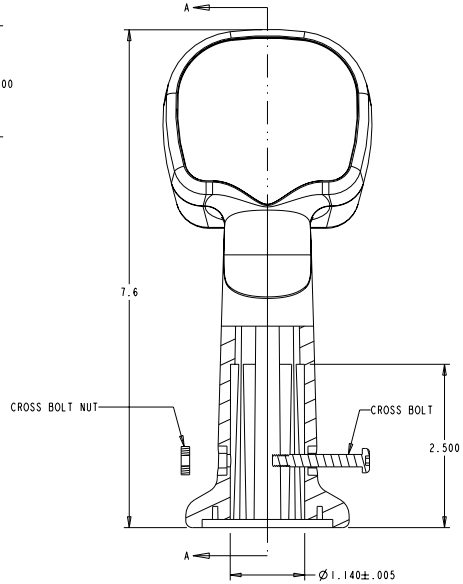


SECTION B-B

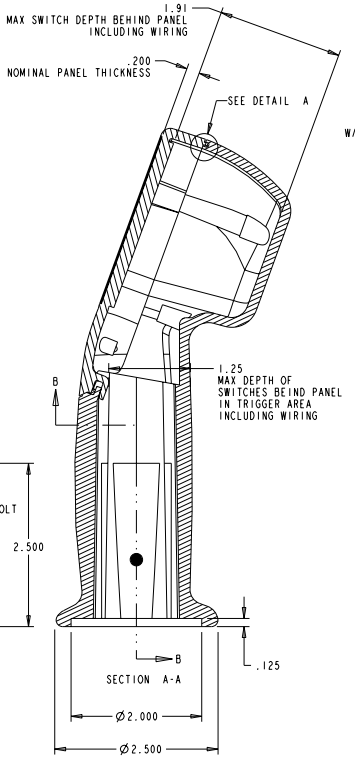

SECTION A-A

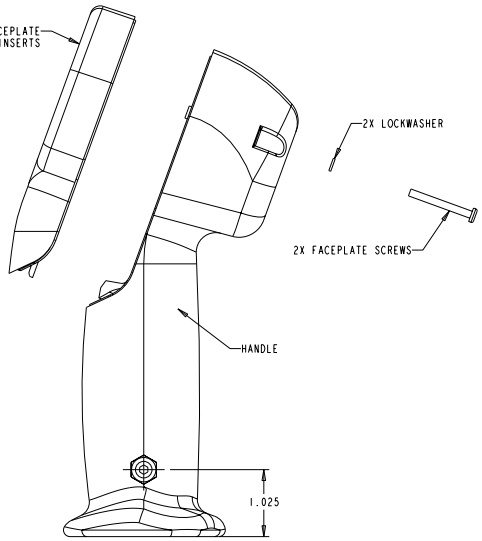

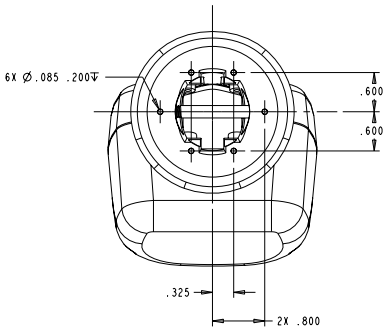

G3-0101			
REV	OCN #	DATE	APR
2	008153	22 MAR 01	LBG
3	008837	30 MAY 01	LBG

☒ MAJOR
■ CRITICAL
▲ SPC CRITICAL

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: .XX ±.03, .XXX ±.010, ANGLES ±2°, DO NOT SCALE
THIRD ANGLE PROJECTION

THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF OTTO ENGINEERING, INC.. IT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF OTTO ENGINEERING, INC..

OTTO CONTROLS
DIVISION OF
OTTO ENGINEERING INC.
CARPENTERSVILLE, ILLINOIS USA

DESCRIPTION
G3, UNIVERSAL GRIP
MEDIUM

DRWN. LBG	SIZE	FSCM NO	DRAWING NO.	REV.
CHKD. RTK	C	21649	G3-0101	3
APPD. JT				
DATE 30-May-01	WT.		Scale 3:4	Sheet 1 OF 1