
Data sheet 1/3

10/2015 / RBA / Ed1

REF : PLAG6AFS

Tooless full shielded angled RJ45 “field installable” plug



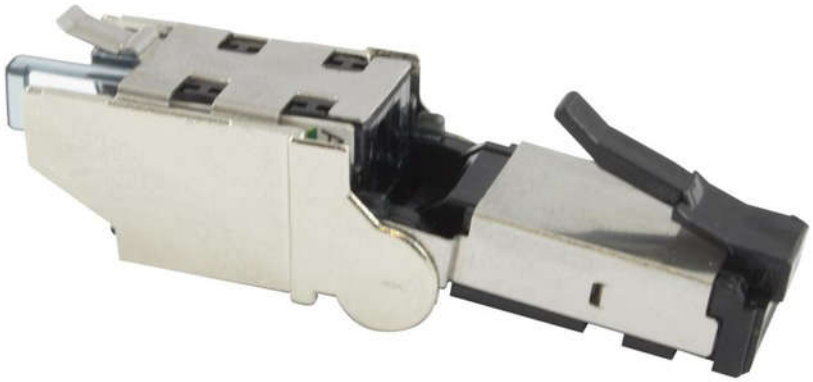

45°



90°

Descriptions

The PLAG6AFS is a full shielded RJ45 plug with rotative head to allow a little bending radius in case of narrow space. This tooless plug is the best connectivity solution in case of direct attaché solution :

- Designed with a rotative head
- IDC blocks specially made for cable AWG 26 to 23 solid cores (maximum insulation : 1.27 OD)
- Technology improvements :
  - Integrated gold contact and stable contact height
  - IDC technology
  - Compensation circuit
- Low useful depth : 26mm
- 4 insertors for a quick connection and safety by a mechanical blocking
- Tool less connection
- Colour code visibility to ensure a visual monitoring during connection
- Suitable for all IP based applications on static situation (IP cams, IP access control, Wifi access point …)

Performances

Performance	Amd1.0 ISO 11801 channel Classe Ea EIA TIA 568-C.2 Channel Cat 6A PoE / PoEP

Ce document est confidentiel, et est la propriété de Multimédia Connect. Multimédia Connect possède un copyright, et le document ne doit pas être copié ou changé sous aucune forme, complètement ou en partie sans permission écrite de Multimédia Connect. Les caractéristiques portées sur cette fiche ne sont pas contractuelles, et sont susceptibles d'être modifiées sans préavis

Data sheet 2/3

10/2015 / RBA / Ed1

REF : PLAG6AFS

Tooless full shielded angled RJ45 “field installable” plug


Technical properties


Connection without tool by IDC	Phosphor Bronze with nickel plating
Conductor gauge	AWG 26 to AWG 22 solid conductor with insulation max 1.27mm
Dimensions	Conforms to FCC part 68 subpart F requirements
Contacts	Gold plating in localized area over nickel undercoat
Housing	Fire retardant thermal plastic UL94-V0
Color code	568A and 568B


Technical properties


Contact resistance	≤ 20 mΩ
Input/output resistance	≤ 200 mΩ
Cycle of insertion	> 500
Cycle of head rotation	< 50
Operating voltage	≤ 72V dc


Exploded view and 3D picture

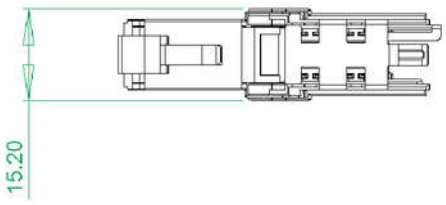



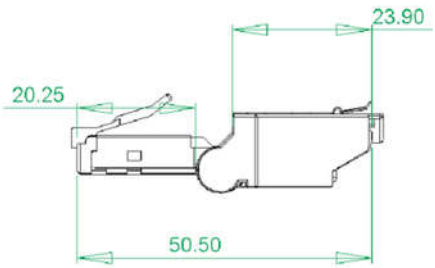

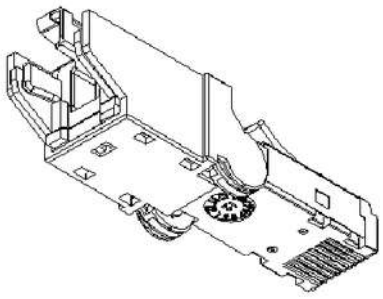



Ce document est confidentiel, et est la propriété de Multimédia Connect. Multimédia Connect possède un copyright, et le document ne doit pas être copié ou changé sous aucune forme, complètement ou en partie sans permission écrite de Multimédia Connect. Les caractéristiques portées sur cette fiche ne sont pas contractuelles, et sont susceptibles d'être modifiées sans préavis


Data sheet 3/3


10/2015 / RBA / Ed1

REF : PLAG6AFS

Tooless full shielded angled RJ45 “field installable” plug

Low useful depth

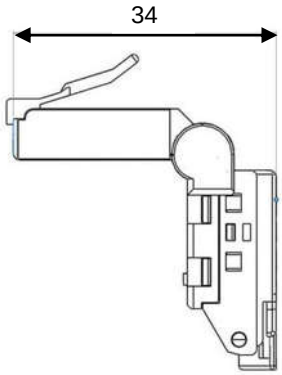

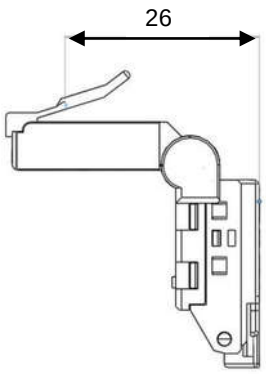

Ordering informations

Item No	Designation	Packaging
PLAG6AFS	Full shielded angled RJ45 plug	unit

Ce document est confidentiel, et est la propriété de Multimédia Connect. Multimédia Connect possède un copyright, et le document ne doit pas être copié ou changé sous aucune forme, complètement ou en partie sans permission écrite de Multimédia Connect. Les caractéristiques portées sur cette fiche ne sont pas contractuelles, et sont susceptibles d'être modifiées sans préavis