Brand of NTN corporation

Technical data

EXFLE204

Bearing units




Grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

KIT CONTENT

EX204G2, FLE204

VISUAL (S)

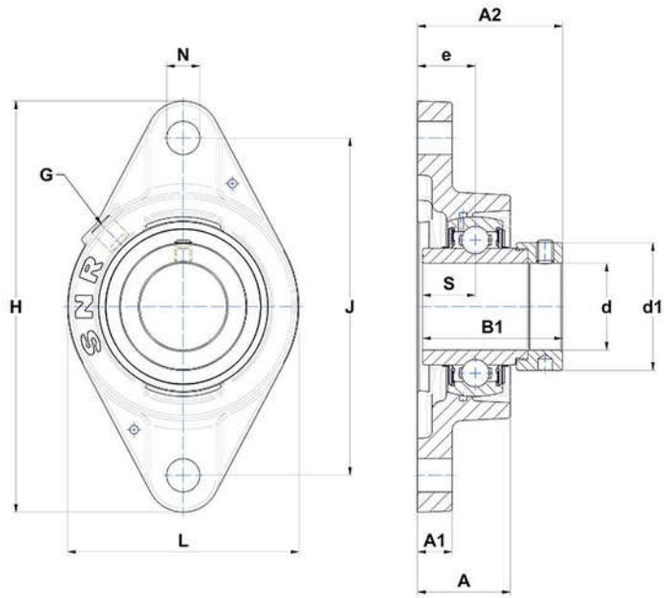

PRODUCT DEFINITION

Brand	SNR
A - Housing height	30,3 mm
A1 - Housing foot height / flange height	10 mm
A2 - Total height from mounting surface	45,5 mm
B - Width of Inner Ring	34 mm
B1 - Overall width Inner Ring	43,5 mm

EXFLE204
Bearing units

PRODUCT DEFINITION	
d - Shaft diameter	20 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	32,4 mm
e - Distance mounting surface to bearing center	19 mm
G - Grease fitting	R1/8"
H - Housing length, width or diameter	112 mm
J - Mounting holes distance	90 mm
L - Housing width / diameter	61 mm
N - Mounting hole dimension	11,5 mm
S - Distance front side/bearing centre	17 mm

PRODUCT PERFORMANCE	
C - Dynamic load rating	12800000 mN
C0 - Static load rating	6650000 mN
Operating temperature min.	253,15 °K
Operating temperature max.	373,15 °K

OTHER FEATURES	
Mass	0,52 kg
Recommended tightening torque for set screw	5.5 N-m