Cover for OGD, OGD-SMD

Cover for Holder OGD, OGD-SMD



4W/10A

Standards
- IEC 60127-6
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals
- VDE Certificate Number: 4008993
- UL File Number: E39328

References
Mating cover to OGD; OGD-SMD

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check, Detailed request for product


Technical Data

Fuse-Link	6.3 x 32 mm
Rated Power Acceptance IEC	4 W / 10 A @ Ta 23 °C
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Cover	Thermoplastic UL 94V-0
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Soldering Methods	Reflow, Wave
Solderability	245 °C / 3 sec acc. to IEC 60068-2-20, Test Td
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Td

Dimension

37.8 mm

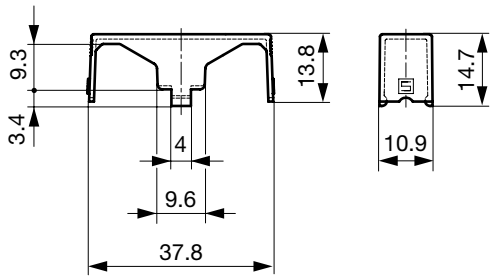

All Variants

Description	Order Number
Reflow-Cover	0853.0917

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit

Bulk (100 pcs.)

05.10.2014

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.