19’’ rack mounting aluminium enclosure

Product overview

Designed for installation of electronic and telecommunication equipment, into 19” racks and cabinets. Featuring ease of assembly and accessibility, via three removable parts: rigid front panel, vented lid and rear panel. With a strong folded sheet-steel construction and 3mm think aluminium front interface-panel, for an effective operation in computer networking, data centres and security control applications.

- 1U, 2U and 3U heights
- 260mm and 360mm depths
- Secured with 10x screws M4 (8x for 1U)
- Front and rear internal supports for mounting of trays or PCBs
- Customisation options include cutouts, mounting and printing
- Custom colours and sizes also available (MOQs apply)

C19G



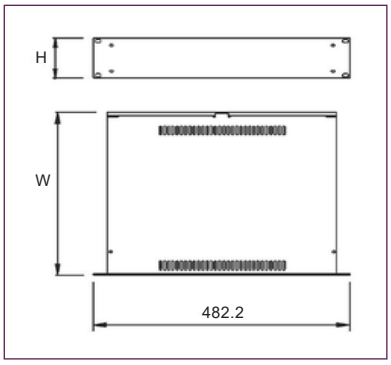

SPECIFICATION	
Materials	Front panel: 3mm thick aluminium Main enclosure: 1.2mm thick steel
Standard colours	Front panel: Anodised, clear or black Main enclosure: Fine texture epoxy paint, similar to RAL 9002
Standard unit includes	Front panel, folded shell, rear panel, vented lid M4 x12mm Long Pozi Pan BZP screws Options: Silver or black handles, with M5 x12mm long pozi CSK screws
Options (MOQ’s apply)	Custom colours Custom sizes

Standard 19” enclosure

SILVER	BLACK	U	DEPTH	HEIGHT
C19G1263S	C19G1263B	1U	263mm	43.6mm
C19G1363S	C19G1363B	1U	363mm	43.6mm
C19G2263S	C19G2263B	2U	263mm	88.1mm
C19G2363S	C19G2363B	2U	363mm	88.1mm
C19G3263S	C19G3263B	3U	263mm	132.5mm
C19G3363S	C19G3363B	3U	363mm	132.5mm

19” enclosure with handles

SILVER	BLACK	U	DEPTH	HEIGHT
C19G2263SH	C19G2263BH	2U	263mm	88.1mm
C19G2363SH	C19G2363BH	2U	363mm	88.1mm
C19G3263SH	C19G3263BH	3U	263mm	132.5mm
C19G3363SH	C19G3363BH	3U	363mm	132.5mm

KEY FEATURES

Easy assembly | Secured with 10x screws | Strong construction