PRODUCT DETAILS

**ARTICLE: 18411FV**

# WHEEL P 150X48/60 HEAVY DUTY BB SWIVEL FORK E70 + BRAKE





## Wheel series P

Monolitic polyammide 6 wheels available with standard shielded or stainless steel precision ball bearings; standard or stainless steel roller bearing; plain bore.
Wheel fitted with ball bearings.

## Castor series E70

Extra heavy duty fork assemblies fabricated from heavy gauge sheet steel; swivelling with a thrust and taper roller bearings. Finish: blue paint.
Leading brake, total stop, adjustable.



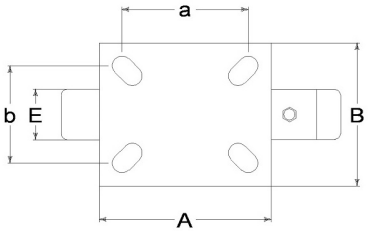
## Technical data

| | | |
|---|---|---|
| Wheel diameter | D | 150 mm |
| Tyre width | E | 48,0 mm |
| Bearing seat diameter | s | 47 mm |
| Bore diameter | d | 20 mm |
| Outer faces bearings distance | V | 54 mm |
| Weight article | | 4,590 kg |
| Hub width | L | 60 mm |
| Overall height | H | 202 mm |
| Top plate outer dimensions | AxB | 135x110 mm |
| Bolt hole spacing | axb | 105x75 mm |
| Bolt hole spacing | axb | 105x80 mm |
| Fixing bolt diameter | g | M12 |
| Offset | F | 65 mm |
| Fork width | U | 60 mm |
| Load Capacity | | 900 kg |

### Related Articles

Spare part wheel: 18011CC
Basic version: 18411
Version with thread-guards: 18411PF
Version with footguard: 18411PP
Version with leading brake and thread-guards: 18411FVPF
Version with leading brake and footguard: 18411FVPP

**GENERAL INFORMATION / RECOMMENDATIONS AND WARNINGS**
The cited text and the complete catalogue in their most up-dated versions are available in the OEM's website page www.lagspa.it/downloads. The dimensions, descriptions, specifications and illustrations herein are indicative and subject to variations without notice. The fact that products are illustrated herein does not necessarily imply they are available from stock nor does it place us under any obligation to supply them.
Tests carried out refer to the original products with original accessories: the replacement of one of the components with others of different manufacture might prevent the same results from being achieved and will automatically invalidate any guarantee. Please contact our technical service concerning any special application.