

HobGuard ---Gives enhanced Hob safety!



TT1001

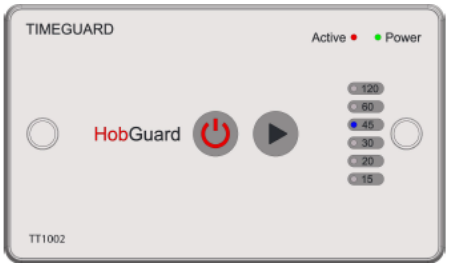

TT1002

Description:

The HobGuard range designed to create an extra protective barrier around the Hob for additional saftey needs.

Why HobGuard:

HobGuard is a device created to prevent Hobs from being left ON unattended or if the user has been distracted.
Stylish design hob timer with countdown LED indicators, which enhance safety by turning off the hob, after a user selected time.

Range:

TT1001	30A WHITE-TOUCH SCREEN GLASS
TT1002	40A WHITE-TOUCH SCREEN GLASS

Features

- The secure and sturdy design made from durable heat resistant materials
- Power and Load LED indicators for easy understanding
- Automatic cut off
- Countdown LED indicators
- Selectable Switched (ON/OFF) or Fixed Modes
- Dil switch to select Maximum Time/Mode
- Ideal for student accommodation, landlords, housing association and family homes who need additional safety
- Glass front plate for easy cleaning
- Detachable back case and fixings accessories included for ease of installation
- Durable Glass finish

Dimensions

	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
TT1001	85	85	39	0.140
TT1002	85	145	39	0.260

Technical Specification

HOBGUARD (TT1001/TT1002)	
Load Current (Max)	30A/40A
Input Voltage	220 - 240V AC
Frequency	50 - 60Hz
Operating Power	<0.1W
Power Factor	0.9
Resistive Load	6.9KW/9.2KW
Back Box	47mm (min)
IP Rating	IP20
IK Rating	IK03
Construction	PC + ABS, UL V-0
Insulation Class	Class II
Operating Temperature	0°C to 60°C
Mode Available	ON/OFF (Switched), Fixed Mode
Time Settings (minutes)	15, 20, 30, 45, 60, 90,120
Cable Connection	Live supply, Neutral supply, Load Neutral, Load Live
Front Projection	15mm
Terminal Capacity (Min-Max)	0.6 – 13.5 mm square
Conformance	EN 60730

Deta Electrical Company Ltd.
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972 Ireland Tel. +44 1582 544 548
technical@deta.co.uk

INS 1117 NPD 0919 V1.0 07/25