


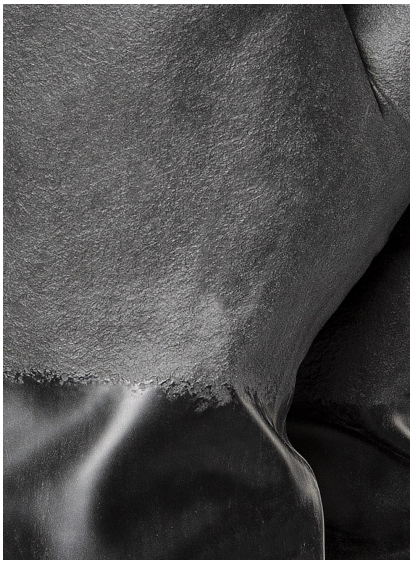

TEGERA® 16

Learn more

SUPERIOR CHEMICAL RESISTANCE

High quality 0,34 mm/13,3 mil butyl glove that provides superior protection against aggressive chemicals without compromising dexterity or comfort. Sandy finish and touchscreen function, use yoru smartphone or another screen with you gloves on. Made for all-round work.

CHARACTERISTICS

- Good fit
- Flexible

FUNCTIONS

- Waterproof
- For touchscreen
- Protection against chemicals

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF
Risk of infection, corrosive injuries, contact with chemicals

PRIMARY ENVIRONMENTS OF USE
Chemical risk environments, environments hazardous to health, corrosive environments, harsh environments

PRIMARY AREAS OF USE
Agricultural work, repair work, petro-chemical work, chemical work, chemical technology work, laboratory work, decontamination, sanitation

PRIMARY INDUSTRIES OF USE
Chemical

TYPE OF WORK
Medium weight

CHEMICAL RESISTANCE
According to EN16523-1:2015. For details, please contact Ejendals.

SPECIFICATION
TYPE Chemical protection gloves
CATEGORY Cat. III
THICKNESS 0,34 mm
LENGTH 350 mm
GRIP DESIGN Sandy finish
COLOUR Black
PAIRS PER: BUNDLE/CARTON 10/100
DISPLAY TYPE Bag
DIPPING MATERIAL Butyl
CUFF STYLE Rolled edges

COMPLIANCE
CE 0299
UK CA Cat. III
EAC
TP TC 019:2011
Information/UIS
EN ISO 374-1:2016/A1:2018 Type B
BIK
EN ISO 374-5:2016 Virus
EN 388:2016+A1:2018 0010X

FEATURES

For touchscreen

Waterproof

Chemical protection

TEST ACCORDING TO EN ISO 374-1:2016

Tested chemical	B	I	K
Permeation level	5	2	6
Degradation %	42,0	66,6	18,1

SIZE		ARTICLE NUMBER	EAN
7	S	16-7	7340118332857
8	M	16-8	7340118332895
9	L	16-9	7340118332932
10	XL	16-10	7340118332970
11	XXL	16-11	7340118333014

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.