
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/27/2012	P.PESA
B	ECN 9793: ADDED RECOMMENDED PANEL CUTOUT	04/12/2019	SELLIS

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
DIELECTRIC	TEFLON	--
CENTER PIN	BRASS	GOLD PLATE
LOCK WASHER	BRASS	NICKEL PLATE
NUT	BRASS	NICKEL PLATE

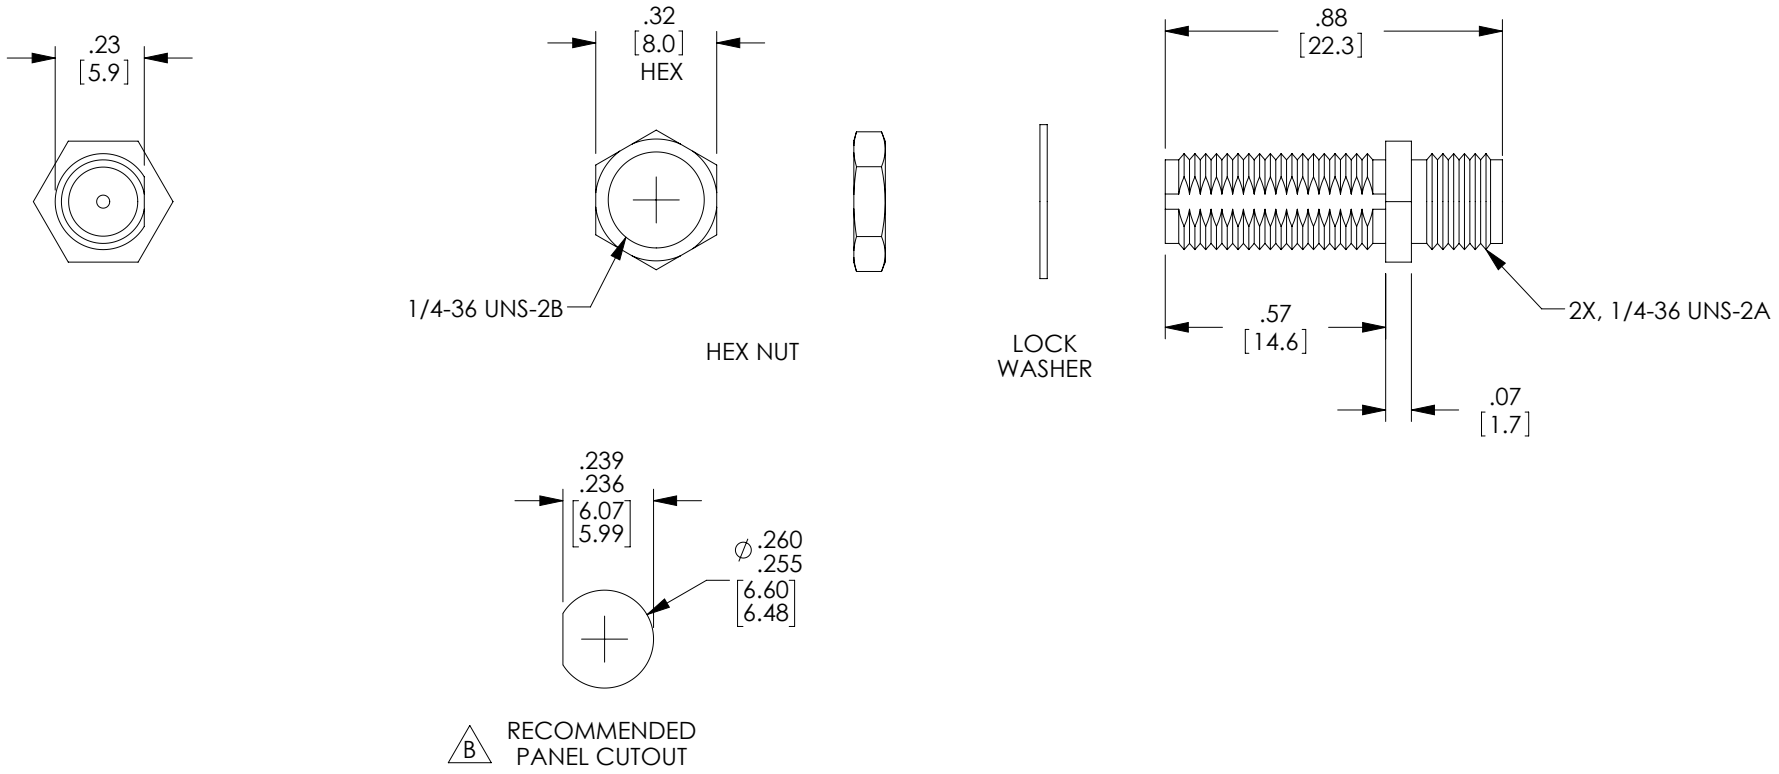

NOTES:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC ~ 6 GHz
VOLTAGE RATING: 500 VOLTS PEAK
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS
INSERTION LOSS: .15 dB MAX.

DIMENSIONS ARE FOR REFERENCE ONLY.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY DFRISIELLO	03/26/2012
CHECKED BY K.BURGNER	03/26/2012
APPROVED BY P.PESA	03/26/2012

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
ADP,SMA F to SMA F BLKHD BULLET

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	AXA-SFSFB	B

SCALE: NONE | CAD FILE: AXA-SFSFB.SLDDRW | SHEET 1 OF 1