
E12583

Wirable socket

SDOGS060--AFKCR

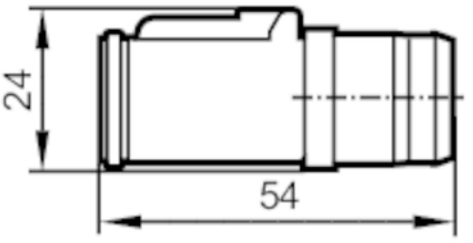

Application		
Special feature		Free from silicone
Free from silicone		yes
Electrical data		
Operating voltage	[V]	8...32 DC
Protection class		III
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-40...80
Ambient temperature (moving)	[°C]	-20...80
Protection		IP 67; (mating connector plugged in)
Mechanical data		
Weight	[g]	15.1
Materials		brass nickel-plated; PA
Remarks		
Pack quantity		1 pcs.

E12583


Wirable socket

SDOGS060--AFKCR

Electrical connection

6 x 0.5 mm²

Connector: 1 x DEUTSCH connector (DT-06-6S-CE02)



Connection

