Zero Smog® TL

Taking you to the next level in removing dangerous gases and particles








- Longer service life due to exceptionally large filter surface
- Low noise levels
- Automated filter change notification system
- Easily operated



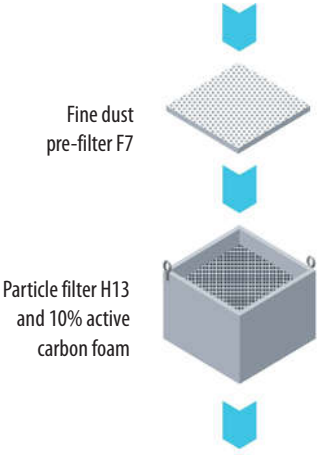

Features and Benefits

- Extraction unit for up to 2 workplaces
- Low noise levels
- Portable, for placement under or next to the bench
- Easy filter replacement
- Audio-visual filter change alarm
- Quick and simple installation with Easy-Click system
- Variable speed setting
- Active carbon foam filter for effective gas cleaning
- Maintenance-free, brushless EC blower



Filter Set

- H13 particle filter and gas filter (10% active carbon foam filter) and ten F7 pre-filters

Order No. **T0058762858**



Remote switch

- Cable length 2m

Order No. **FT91000033**

Technical Data

Dimensions (L x W x H) in mm	335 x 330 x 445
Weight in kg	9
Voltage	230 V, 50 Hz / 120 V, 60 Hz
Noise level	< 50 db (A)
Electrical power in W	120
Max. blower vacuum in Pa	3,000
Max. blower extraction rate	190 m^3/h
Pre-filter	F7 fine dust filter
Compact filter	Particle filter H13 + gas filter (10% carbon foam filter)
Particle filter MPPS	>99.95%
Order no. FT91013699	**Zero Smog TL Fume Extraction Unit 230V F/G**
Order no. ZEROSMOGTL	**Zero Smog TL 120V B**
Order no. FT91013599	**Zero Smog TL230V AUS/CN**
Order no. FT91013999	**Zero Smog TL 230V IND**
Order no. FT91014699	**Zero Smog TL with a Gas Filter 230V F/G**



Zero Smog® TL Kit 1 with Funnel Nozzle

- Zero Smog® TL fume extraction unit
- Stop valve with bench mounting brackets
- Flexible, adjustable extraction arm, 1 m, ø 60 mm
- Extraction hose, flexible, 3 m, ø 60 mm
- ALFA funnel nozzle
- Remote switch

Order No. 230 V	**FT91015699**
Order No. 120 V	**ZEROSMOGTLKIT1**



Zero Smog® TL Kit 2 with Sloped Nozzle

- Zero Smog® TL fume extraction unit
- 2x Flexible, adjustable extraction arm, 1,5 m, ø 60 mm
- 2x Sloped nozzle, length 130 mm, ø 60 mm
- Remote switch
- 2x Fixing clamps for the extraction arm

Order No. 230 V	**FT91016699**



Zero Smog® TL Kit 2 with Funnel Nozzle

- Zero Smog® TL fume extraction unit
- 2x Flexible, adjustable extraction arm, 1.5 m, ø 60 mm
- 2x ALFA funnel nozzle
- Remote switch
- 2x Fixing clamps for the extraction arm

Order No. 230 V	**FT91017699**

© 2016 Weller Tools GmbH | Weller Tools GmbH, Carl-Benz-Straße 2, 74354 Besigheim, Germany | Tel: +49 (0) 7143 580 - 0